

LINI W6

Wall mounted luminaire

design Jude Allen



The Lini range focuses on minimal, sophisticated geometries combined with complex machining processes to create elegant, simple to install lighting elements. Lini W6 is a discreet wall-mount luminaire with seamless, invisible mounting. Create a composition using single or dual emission, utilizing a variety of light shapes.

La gamme Lini se concentre sur des géométries minimales et sophistiquées combinées à des processus d'usinage complexes pour créer des éléments d'éclairage élégants et faciles à installer. Lini W6 est un luminaire mural discret avec un montage invisible et sans soudure. Créez une composition en utilisant une émission simple ou double, en utilisant une variété de formes lumineuses.

La gama Lini se centra en geometrías mínimas y sofisticadas combinadas con complejos procesos de mecanizado para crear elementos de iluminación elegantes y fáciles de instalar. Lini W6 es una discreta luminaria de pared con un montaje invisible y sin juntas. Cree una composición con emisión simple o doble, utilizando una gran variedad de formas de luz.

IP20 Class 2  **ADA** made in Canada

Supply current

Courant d'alimentation

Corriente de alimentación

Static White: 500mA (V_i 9-2x9V)

Dim To Warm: 250mA (V_i 18-2x18V)

Power

Pouissance

Potencia

Static White:

4,5W (single) 9W (double)

Dim To Warm:

4,5W (single) 9W (double)

Series wiring

Câblage en série

Cableado en serie

LED selection

Sélection des LED

Selección del LED

2-Step MacAdam

CRI


98

Lumens

	single	double
2400K	406 lm	812 lm
2700K	517 lm	1034 lm
3000K	541 lm	1082 lm
3500K	548 lm	1096 lm
4000K	541 lm	1082 lm
DW	358 lm	716 lm

Dimensions


Dimensiones



Photometric diagrams

Diagrammes photométriques


Diagramas fotométricos



Code construction

Construction du code produit

Construcción del código de producto

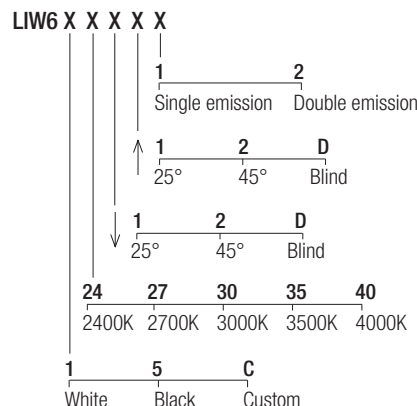

Accessories

Accessoires

Accesorios

LH01

Low luminance hex louvre 

Static White 500mA drivers

Static White Alimentateurs 500mA

Static White Alimentadores 500mA

CCPR010A-500 (1..2/1) IP20

Dimming: PHASE - 0-10V

CCPR040A-500 (1..6/1..3) IP20

Dimming: PHASE - 0-10V

Dim to Warm 250mA drivers

Dim to Warm Alimentateurs 250mA

Dim to Warm Alimentadores 250mA

CCPR010A-250-DW (1..2/1) IP20

Dimming: PHASE - 0-10V

CCPR040A-250-DW (1..3/1) IP20

Dimming: PHASE - 0-10V