

VEGA 20

IP-rated downlight

design Roberto Mantovani



IP67 recessed luminaires that offer the highest build quality; with extremely small dimensions; elevated luminous fluxes and embedded optics for high visual comfort. The body and front are of thick anodised aluminium; with powder coating on the face. Extra-clear tempered glass; ATEX cable gland and neoprene cable. Available in a range of colour temperatures and beam apertures.

Encastrables trimless IP67 de très haute qualité constructive; avec des dimensions extrêmement contenues. Corps en aluminium anodisé à épaisseur; versions avec frontal en aluminium anodisé et peint en poudre. Verre extra-clair trempé; presse-étoupe ATEX; câble en néoprène. L'optique en retrait garantit un confort visuel élevé.

Luminarias empotrables trimless IP67 de muy alta calidad de fabricación con tamaño extremadamente reducido. Cuerpo de aluminio anodizado con espesor; versiones con frente de aluminio anodizado y barnizado con polvo. Vidrio templado extra claro; prensaestopas ATEX; cable de neoprene. La óptica hacia atrás garantiza un alto confort visual.



IP67

Class 2



made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
500mA (V_i36V)

Power

Pouissance
Potencia
18W

LED selection

Sélection des LED
Selección del LED
2-Step MacAdam

CRI


98

Lumens

2700K — 2165 lm
3000K — 2279 lm
3500K — 2498 lm
4000K — 2423 lm

Dimensions

Dimensiones



Code construction

Construction du code produit

Construcción del código de producto


VG2 X X X

1	2	3	4	5	6	5
15° Soft	15° Tight	24°	36°	60°	20°x55° Oval	120°
1	5	C				
White	Black	Custom				
27	30	35	40			
2700K	3000K	3500K	4000K			

Photometric diagrams

Diagrammes photométriques

Diagramas fotométricos

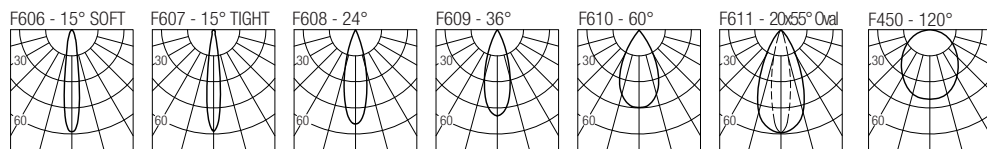

Accessories

Accessoires


Accesorios

AT064R01070

Airtight recessed housing for insulated ceiling

IC064R01070

Recessed housing for insulated ceiling



LH06

Low luminance hex louvre




MP-R070

Baseplate




R01070

T-bar baseplate



CSXJ02

Recessing box - Controcassa



500mA drivers

Alimentateurs 500mA

Alimentadores 500mA

CCPR040A-500 (1) IP20

Dimming: PHASE - 0-10V