


ZERO Q10

Trimless downlight

design Jude Allen



Revolutionary trimless recessed fixtures: with diameters starting from just 30mm and an extremely simple fixing system, offer innovative compositional possibilities and recessed optics for high visual comfort. Equipped with Fidelity LED it places emphasis on CRI98 and R9 93. Available in eight finishes, three colour temperatures and two extremely clean and performing optics.

Encastrables trimless révolutionnaires : avec des diamètres qui partent de 30 mm seulement et un système de fixation au coffrage extrêmement simple, ils offrent des possibilités de composition inédites, avec des optiques en retrait pour un confort visuel élevé. Équipés avec LED Fidelity il se caractérise par un CRI98 et R9 93. Disponible dans huit finitions, trois températures couleur et deux optiques extrêmement propres et performantes.

Empotrables trimless revolucionarios: con diámetros a partir de 30 mm y un sistema de fijación extremadamente sencillo al encofrado, ofrecen unas posibilidades de composición sin precedentes, con ópticas hacia atrás para un alto confort visual. Equipados con LED Fidelity, se caracteriza por un CRI98 y R9 93. Disponible en ocho acabados, tres temperaturas de color y dos ópticas extremadamente sutiles y de alto rendimiento.

IP20 Class 2  JA8 made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
Static White: 500mA (V_i18V)
Dim To Warm: 400mA (V_i18V)
Tunable White: 500mA (V_i18V)

Power

Pouissance
Potencia
Static White: 9W
Dim To Warm: 7,2W
Tunable White: 9W

Series wiring

Câblage en série
Cableado en serie

LED selection

Sélection des LED
Selección del LED
2-Step MacAdam


CRI
98

Lumens

2400K	744 lm
2700K	1088 lm
3000K	1142 lm
3500K	1156 lm
4000K	1139 lm
DW	645 lm
TW	847 lm

Dimensions


Dimensiones



Photometric diagrams

Diagrammes photométriques

Diagramas fotométricos

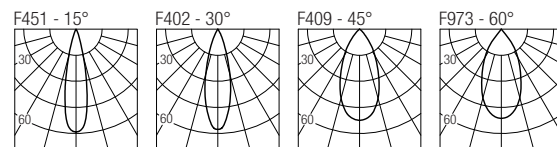

Code construction

Construction du code produit

Construcción del código de producto

ZQ10 X X X

1	2	3	4		
15°	30°	45°	60°		
24	27	30	35	40	DW TW
2400K	2700K	3000K	3500K	4000K	Dim to Warm Tunable White
1	5	C			
White	Black	Custom			

Accessories

Accessoires


Accesorios

AT086Q02058

Airtight recessed housing for insulated ceiling

IC086Q02058

Recessed housing for insulated ceiling




MP-Q058

Baseplate



Q02058

T-bar baseplate




LH02

Low luminance hex louvre 

ZQK006

Plasterboard recessing frame

Flangia per cartongesso



Static White 500mA drivers

Static White Alimentateurs 500mA

Static White Alimentadores 500mA

CCPR010A-500 (1) IP20

Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20

Dimming: PHASE - 0-10V

Dim to Warm 400mA drivers

Dim to Warm Alimentateurs 250mA

Dim to Warm Alimentadores 250mA

CCPR010A-250-DW (1) IP20

Dimming: PHASE - 0-10V

CCPR040A-250-DW (1) IP20

Dimming: PHASE - 0-10V

Tunable White 500mA drivers

Tunable White Alimentateurs 500mA

Tunable White Alimentadores 500mA

DL0561S1 (1..3) IP20

Dimming: PHASE - 0-10V