

**ZOE 10**  
Trimless downlight

design Rod&Todd



A small and shallow trimless downlight characterized by a minimal design and high optical performance. Equipped with CRI98 LEDs, it lends itself to applications ranging from accent to general illumination. Thanks to the use of highly-advanced optics, it offers narrow and precise light beams. Can be fitted with an anti-glare filter for maximum visual comfort.

Encastrable trimless à plafond petit et peu profond caractérisé par un design minimal et des performances optiques élevées. Équipé de LEDs avec CRI98, il se prête à des applications allant de l'accentuation à l'éclairage général. Grâce à l'utilisation d'optiques avancées, il offre des faisceaux lumineux étroits et précis. Peut être équipé d'un filtre anti-éblouissement pour un confort visuel maximal.

Un downlight trimless pequeño y poco profundo que se caracteriza por un diseño minimalista y un alto rendimiento óptico. Equipado con LED CRI98, se presta a aplicaciones que van desde acento hasta iluminación general. Gracias al uso de ópticas muy avanzadas, ofrece haces de luz estrechos y precisos. Se puede equipar con un filtro antideslumbramiento para un máximo confort visual.

IP20 Class 2  JA8 made in Canada

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
Static White: 500mA (V<sub>i</sub>18V)  
Dim To Warm: 400mA (V<sub>i</sub>18V)  
Tunable White: 500mA (V<sub>i</sub>18V)

**Power**  
Puissance  
Potencia  
Static White: 9W  
Dim To Warm: 7,2W  
Tunable White: 9W


**Series wiring**  
Câblage en série  
Cableado en serie

**LED selection**  
Sélection des LED  
Selección del LED  
2-Step MacAdam


**CRI**  
98

**Lumens**  
2400K — 770 lm  
2700K — 1125 lm  
3000K — 1180 lm  
3500K — 1195 lm  
4000K — 1178 lm  
DW — 667 lm  
TW — 875 lm

**Dimensions**  
Dimensiones




**Photometric diagrams**  
Diagrammes photométriques  
Diagramas fotométricos

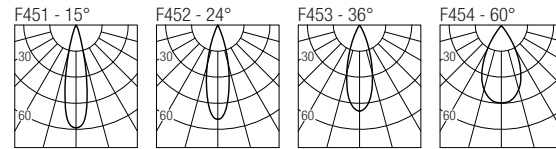

**Code construction**

Construction du code produit  
Construcción del código de producto

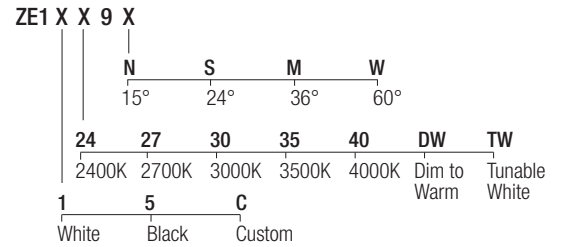


**Accessories**

Accessoires  
Accesorios

**AT064R01075**

Airtight recessed housing for insulated ceiling



**IC064R01075**

Recessed housing for insulated ceiling

**MP-R075**

Baseplate




**R01075**

T-bar baseplate



**ZQC003 White**

Plasterboard recessing frame



**ZQC003.BMK-WH White**

**ZQC003.BMK-BLK Black**

**ZQC003.BMK-CU Custom**

Backmount frame for hard surfaces



**LH04**

Low luminance hex louvre 

**Static White 500mA drivers**

Static White Alimentateurs 500mA  
Static White Alimentadores 500mA

**CCPRO10A-500 (1) IP20**

Dimming: PHASE - 0-10V

**CCPRO40A-500 (1..3) IP20**

Dimming: PHASE - 0-10V

**Dim to Warm 400mA drivers**

Dim to Warm Alimentateurs 400mA  
Dim to Warm Alimentadores 400mA

**CCPRO10A-400 (1) IP20**

Dimming: PHASE - 0-10V

**CCPRO40A-400 (1..3) IP20**

Dimming: PHASE - 0-10V

**Tunable White 500mA drivers**

Tunable White Alimentateurs 500mA  
Tunable White Alimentadores 500mA

**DL0561S1 (1..3) IP20**

Dimming: 0-10V