
FLEXA LIGHTING NORTH AMERICA


smart book 2024



FLUSH OPTIC
DOWNLIGHTS

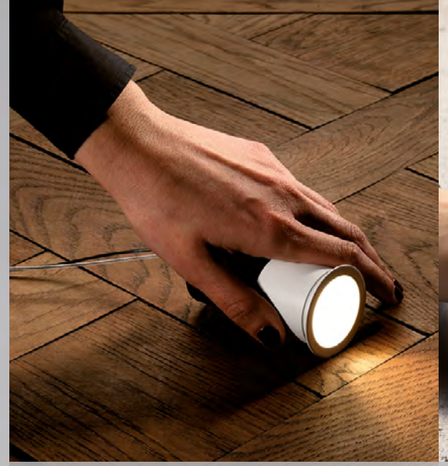

RECESSED OPTIC
DOWNLIGHTS

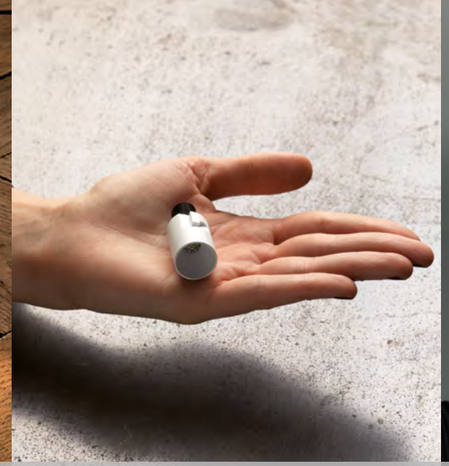

TRIMLESS
DOWNLIGHTS



ADJUSTABLE
DOWNLIGHTS




STEPLIGHTS



TRIMLESS
PROJECTORS



SEMI-RECESSED
PROJECTORS

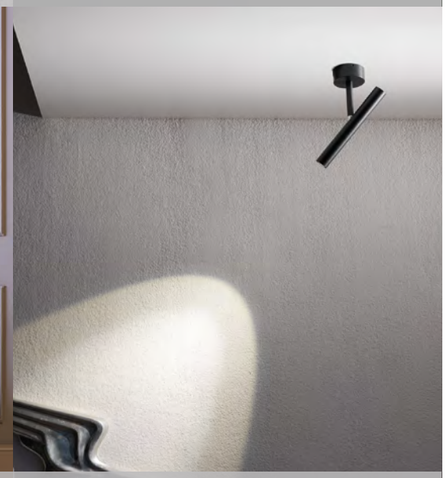


SURFACE
PROJECTORS



LINEAR SYSTEMS



CEILING &
WALL MOUNTED

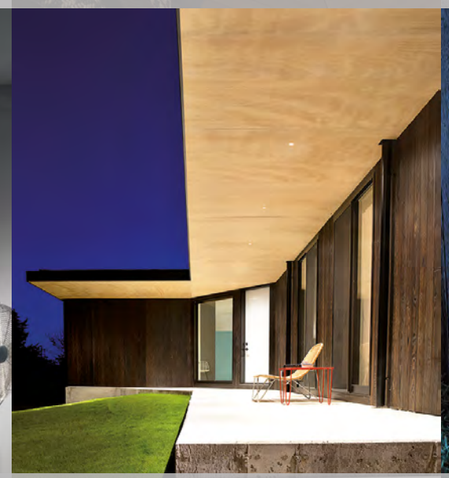

IP RATED
DOWNLIGHTS



UPLIGHTS &
PATHLIGHTS



IP RATED
PROJECTORS



BOLLARDS

FLEXA LIGHTING
NORTH AMERICA

- alphabetical index
- about us
- contacts

FLUSH OPTIC DOWNLIGHTS



SKY
0,75W IP20



SELENE
1,5W IP20



KOL
4,5W IP20



FLEXUS 6
4,5W IP20



FLEXUS 10
9W IP20



FLEXUS 20
18W IP20



TAG
7,5W IP20


RECESSED OPTIC DOWNLIGHTS



BYE
0,75W IP20



BABA R2
1,5W IP20



BABA Q2
1,5W IP20



BABA R6
4,5W IP20



BABA Q6
4,5W IP20



BABA R10
9W IP20



BABA Q10
9W IP20



FRANNY 6
4,5W IP20



FRANNY 10
9W IP20



FRANNY 20
18W IP20



WIM 6
4,5W IP20



WIM 10
9W IP20



KORINE 10
9W IP20



NEIL
7,5W IP20



BLACK 2
1,5W IP20



BLACK 6
4,5W IP20

CONTINUE ON NEXT PAGE ▸

RECESSED OPTIC DOWNLIGHTS



BLACK 10
9W IP20



HAP 110
9W IP20



HAP 120
2x9W IP20



HAP 130
3x9W IP20



HAP 140
4x9W IP20



ZED
1,5W IP20



TASK 10
9W IP20

TRIMLESS DOWNLIGHTS



ZERINO
0,75W IP20



ZERO R2
1,5W IP20



ZERO Q2
1,5W IP20



ZERO R6
4,5W IP20



ZERO Q6
4,5W IP20



ZERO R10
9W IP20



ZERO MOVE 2
1,5W IP20



ZERO MOVE 6
4,5W IP20



ZED TRIMLESS
1,5W IP20



NONE R10
9W IP20



NONE Q10
9W IP20



HOLE
7,5W IP20



ZOE 6
4,5W IP20



ZOE 10
9W IP20



ZOE 20
18W IP20



MOON Q10
9W IP20

CONTINUE ON NEXT PAGE ▸

TRIMLESS DOWNLIGHTS



MOON QX120
2x9W IP20



MOON QX130
3x9W IP20



SEXUS 6
4,5W IP20



SEXUS 10
9W IP20



SEXUS 6 UGR
4,5W IP20



SEXUS 10 UGR
9W IP20



MILO 10
9W IP20



MILO X120
2x9W IP20



MILO X130
3x9W IP20

ADJUSTABLE DOWNLIGHTS



ANDREW
0,75W IP20



DAHLIA
1,5W IP20



ADAN
4,5W IP20



JOEL 2
1,5W IP20



JOEL 6
4,5W IP20



PLEXUS 6
4,5W IP20



PLEXUS 10
9W IP20



PLEXUS 6 UGR
4,5W IP20

CONTINUE ON NEXT PAGE

ADJUSTABLE DOWNLIGHTS



PLEXUS 10 UGR
9W IP20



MINE 6
4,5W IP20



MINE 10
9W IP20



MINE 20
18W IP20



MINE 30
27W IP20



LOLLO 10
9W IP20



LOLLO X120
2x9W IP20



LOLLO X130
3x9W IP20



LOLLO 20
18W IP20



LOLLO X220
2x18W IP20



LOLLO X230
3x18W IP20




LOLLO 30
27W IP20




LOLLO X320
2X27W IP20



LOLLO X330
3X27W IP20



MINILEDA R10
3W IP20



MINILEDA Q10
3W IP20



MINILEDA QX120
2x3W IP20



MINILEDA QX130
3x3W IP20



LEDA R10
9W IP20



LEDA Q10
9W IP20



LEDA QX120
2x9W IP20



LEDA QX130
3x9W IP20

STEPLIGHTS



SOREL
1,5W IP65



UMA
1W IP20



BIRDIE
1W IP20



BIRDIE TRIMLESS
1W IP20



BEAN
1W IP67



BANG
1,5W IP20



DAGO 2
1,5W IP20



DAGO 6
4,5W IP20

TRIMLESS PROJECTORS



ELIA T6
4,5W IP20



ELIA T10
9W IP20



ELIJAH T6
4,5W IP20



ELIJAH T10
9W IP20



ELO T6
4,5W IP20



ELO T10
9W IP20



JOS T2
1,5W IP20



JOS T6
4,5W IP20



JOS T10
9W IP20



TEDDY T6
4,5W IP20



TEDDY T10
9W IP20

SEMI-RECESSED PROJECTORS



ELIA R6
4,5W IP20



ELIA R10
9W IP20



ELIJAH R6
4,5W IP20



ELIJAH R10
9W IP20



ELO R6
4,5W IP20



ELO R10
9W IP20



JOS R2
1,5W IP20



JOS R6
4,5W IP20



JOS R10
9W IP20



TEDDY R6
4,5W IP20



TEDDY R10
9W IP20

SURFACE PROJECTORS



ELIA S6
4,5W IP20



ELIA S10
9W IP20



ELIJAH S6
4,5W IP20



ELIJAH S10
9W IP20



ELO S6
4,5W IP20



ELO S10
9W IP20



JOS S2
1,5W IP20



JOS S6
4,5W IP20



JOS S10
9W IP20



TEDDY S6
4,5W IP20



TEDDY S10
9W IP20



BULL 10 BASE
9W IP20



BULL 20 BASE
18W IP20



BULL 40 BASE
36W IP20



BULL 10 LAY
9W IP20



BULL 20 LAY
18W IP20



BULL 40 LAY
36W IP20



SWAN 10
9W IP20



SWAN X120
2x9W IP20



SWAN X130
3x9W IP20



PUFF
2W IP20

LINEAR SYSTEMS



120V SINGLE CIRCUIT TRACK



120V TRIPLE CIRCUIT DIMMNG TRACK



WAND 1020
9-18W IP20



BULL 40
36W IP20



24V SURFACE SHALLOW TRACK



24V SURFACE DEEP TRACK



24V RECESSED DEEP TRACK




24V TRIMLESS DEEP TRACK



ELIA X6
4,5W IP20



ELIA X10
9W IP20



ELIJAH X6
4,5W IP20



ELIJAH X10
9W IP20



ELO X6
4,5W IP20



ELO X10
9W IP20



JOS X2
1,5W IP20



JOS X6
4,5W IP20




JOS X10
9W IP20



TEDDY X6
4,5W IP20



TEDDY X10
9W IP20



WAND X1020
9-18W IP20

CONTINUE ON NEXT PAGE ▸

LINEAR SYSTEMS



ESME PRECISION X10
9W IP20



ESME PRECISION X20
18W IP20



ESME PERFORMANCE X10
9W IP20



ESME PERFORMANCE X20
18W IP20



ESME X10
9W IP20



ESME X20
18W IP20



MAGGY 36



LEONARD 36
4,5W IP20



DAVID 36
9W IP20



PRINCE 36
9W IP20



BEN 36
15W IP20



MAGGY 72



LEONARD 72
9W IP20



DAVID 72
18W IP20



PRINCE 72
18W IP20



BEN 72
30W IP20

CEILING AND WALL MOUNTED LUMINAIRES



ARIK 6
4,5W IP20



ARIK 10
9W IP20



CRU
9W IP20



ART
7,5W IP65



SASABUNE
9W IP65




KELLER S
7,5W IP65



KELLER D
2x7,5W IP65



GAGA
2x9W IP20



CADMO 6
4,5-9W IP65

IP RATED DOWNLIGHTS



PUCK
1W IP67



TYTUS
1W IP67



TYZAN
1W IP67



LOTUS 2
1,5W IP67



LOTUS 6
4,5W IP67



BABUS 2
1,5W IP67



BABUS 6
4,5W IP67



BABUS 10
9W IP67



ZERUS 2
1,5W IP67



ZERUS 6
4,5W IP67



ZERUS 10
9W IP67



FLY 6
4,5W IP67



FLY 10
9W IP67



ALPHA 10
9W IP67



JUPITER
7,5W IP67



VENUS
7,5W IP67



ERIS
7,5W IP67



WOTAN 10
9W IP67



WOTAN 20
18W IP67



SLOT 6
4,5W IP67



SLOT 10
9W IP67



TYRONE 6
4,5W IP67



TYRONE10
9W IP67

UPLIGHTS AND PATHLIGHTS



TYLA
1W IP67



FATBOY 2
1,5W IP67



TERA 2
1,5W IP67



TERA 6
4,5W IP67



DIG 6
4,5W IP67



DIG 10
9W IP67



GLASS 6
4,5W IP67



GLASS 10
9W IP67



JAN 10
9W IP67




BREE
7,5W IP67



DESERT 10
9W IP67



DESERT 20
18W IP67



NEXUS 6
4,5W IP67



NEXUS 10
9W IP67



MAL 10
9W IP67



MAL 20
18W IP67



BUNGA
1,5W IP67




MINIAIR
1,5W IP67



AIR 6
4,5W IP67

IP RATED PROJECTORS




YAGA
1W IP65



OLU 2
1,5W IP65



OLU 6
4,5W IP65



MAUNA 6
4,5W IP65



MAUNA 10
9W IP65



MAHALO
7,5W IP65



BRUTUS 10
9W IP65



BRUTUS 20
18W IP65



POLE



OLU 6 POLE
4,5W IP65



MAHALO POLE
7,5W IP65

BOLLARDS



ELLE 2
1,5W IP65




ELLE 6
4,5W IP65




DUSK
8,2W IP65

POWER SUPPLIES



DRIVERS

- Adan
- Air
- Alpha
- Andrew
- Arik
- Art
- Baba
- Babus
- Bang
- Bean
- Birdie
- Birdie Trimless
- Black
- Bree
- Brutus
- Bull
- Bull Base
- Bull Lay
- Bunga
- Bye
- Cadmo
- Cru
- Dago
- Dahlia
- Desert
- Dig
- Dusk
- Elia R
- Elia S
- Elia T
- Elia X
- Elijah R
- Elijah S
- Elijah T
- Elijah X
- Elle
- Elo R
- Elo S
- Elo T
- Elo X
- Eris
- Esme X
- Esme Performance X
- Esme Precision X
- Fatboy
- Flexus
- Fly
- Franny
- Gaga
- Glass
- Hap
- Hole
- Jan
- Joel
- Jos R
- Jos S
- Jos T
- Jos X
- Jupiter
- Keller
- Kol
- Korine
- Leda
- Lollo
- Lotus
- Maggy 36
- Maggy 72
- Mahalo
- Mal
- Mauna
- Milo
- Mine
- Miniair
- Minileda
- Moon
- Neil
- Nexus
- None
- Olu
- Plexus
- Plexus UGR
- Pole
- Puck
- Puff
- Sasabune
- Selene
- Sexus
- Sexus UGR
- Sky
- Slot
- Sorel
- Swan
- Tag
- Task
- Teddy R
- Teddy S
- Teddy T
- Teddy X
- Tera
- Tyla
- Tyrone
- Tytus
- Tyzan
- Uma
- Venus
- Wand
- Wand X
- Wim
- Wotan
- Yaga
- Zed
- Zed Trimless
- Zerino
- Zero
- Zero Move
- Zerus
- Zoe
- 24V Tracks
- 120V Tracks

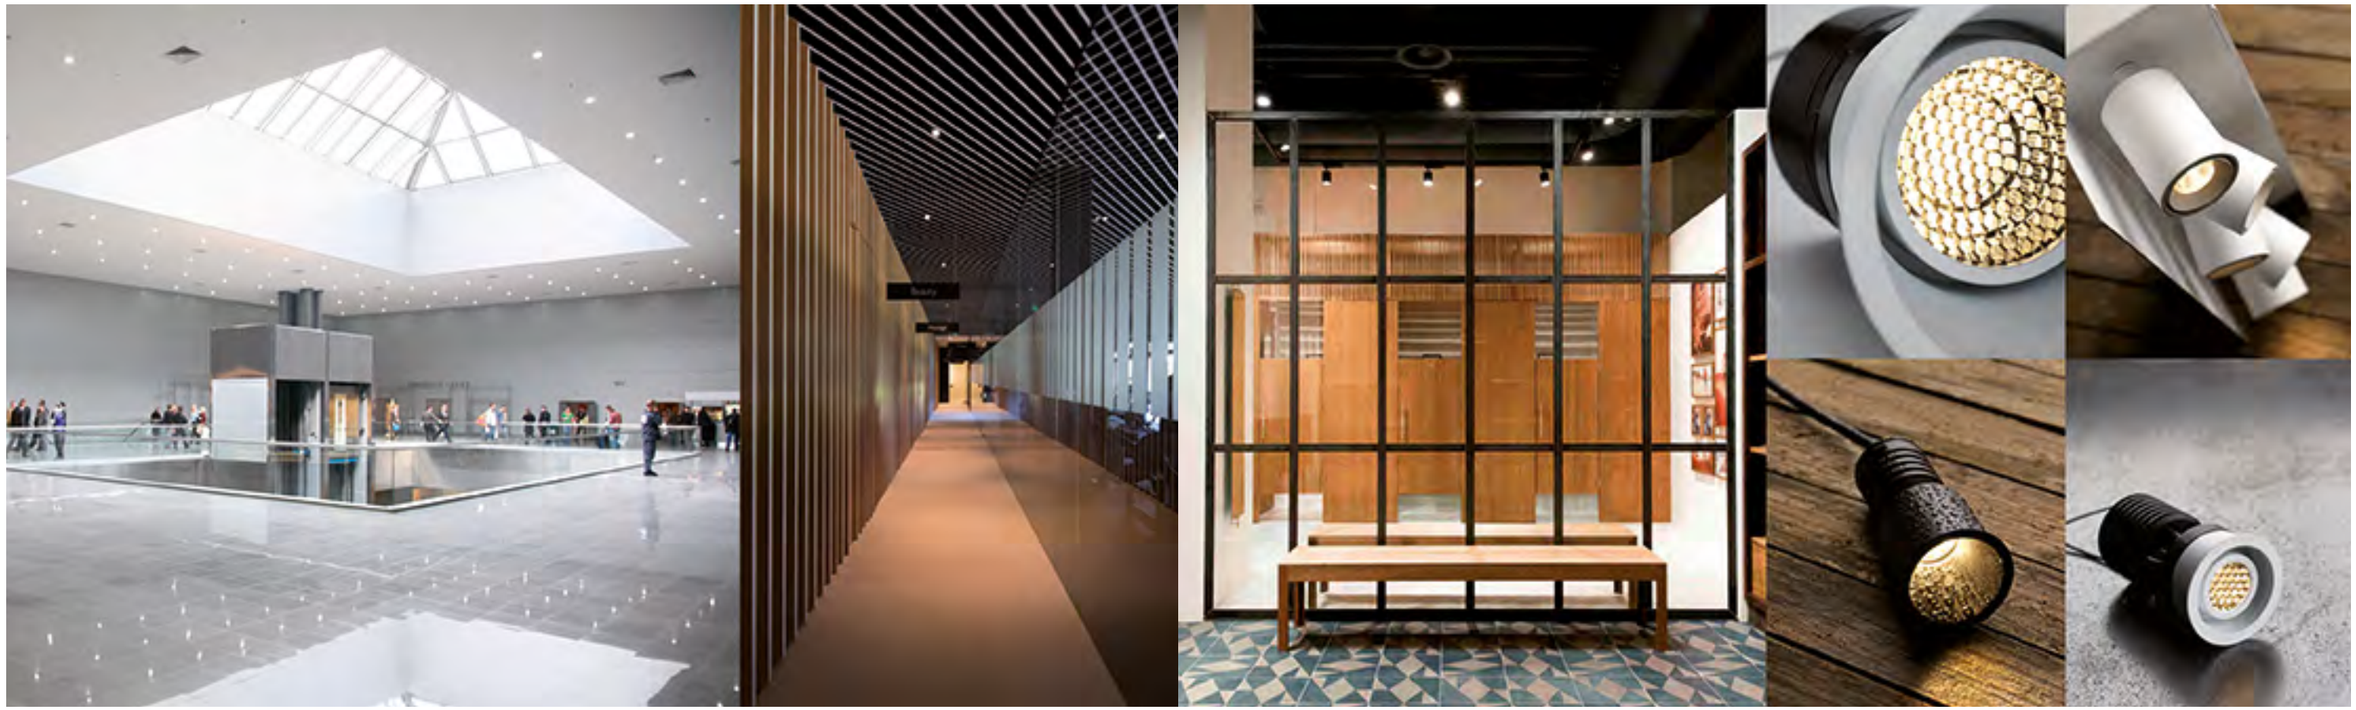

Our value

People whose commitment and dedication can bring an innovative manufacturing project to fruition: this is our most genuine asset. Founded in 2010 by Roberto Mantovani, a designer with experience in product and lighting design, Flexalighting has grown over time, enriched by staff who are attentive, intelligent and open to new challenges. Our resources have enabled us to develop a wide range of LED lighting devices for interiors and exteriors, all entirely Made in Italy, for applications ranging from residential to retail, hospitality and service areas. Products in which meticulous attention to reliability and optical and structural quality is translated into high-level lighting solutions that can innovate the world of professional lighting.


Notre valeur

Des personnes qui, grâce à leur engagement et leur dévouement ont su concrétiser un projet industriel novateur: c'est cela qui constitue notre substance la plus authentique. La Société Flexalighting, fondée en 2010 par Roberto Mantovani, designer de grande expérience dans le monde du design de produit et du lighting design, a grandi au cours des années et s'est enrichie d'un personnel consciencieux, capable et sensible aux défis. Notre patrimoine humain nous a permis de développer une vaste gamme d'appareils d'éclairage à LED d'intérieurs et d'extérieurs, totalement made in Italy, avec des applications allant du résidentiel au retail, à l'hospitality, aux espaces tertiaires. Produits auxquels on a consacré une grande attention quant à la qualité optique et de construction mais aussi à l'efficience, ce qui traduit dans des solutions de lumière de haut niveau, capables d'innover le monde de l'éclairage professionnel.

Nuestro valor

Personas que con empeño y dedicación concretan un proyecto industrial innovador: esta es nuestra mejor y más auténtica idea. Fundada en 2010 por Roberto Mantovani, diseñador con experiencia en el mundo del diseño de productos y del diseño de iluminación, Flexalighting ha crecido con el paso de los años enriqueciéndose con un personal atento, inteligente, sensible con los desafíos. Gracias a nuestro patrimonio humano hemos desarrollado una gama amplia de aparatos de iluminación con LED para interiores y exteriores, completamente realizados en Italia, para aplicaciones que van de las zonas residenciales a los minoristas, espacios terciarios y sector hospitalario. Productos en los cuales una gran atención a la calidad óptica y constructiva y a la fiabilidad se traduce en soluciones de luz de alto nivel, capaces de innovar el mundo de la iluminación profesional.



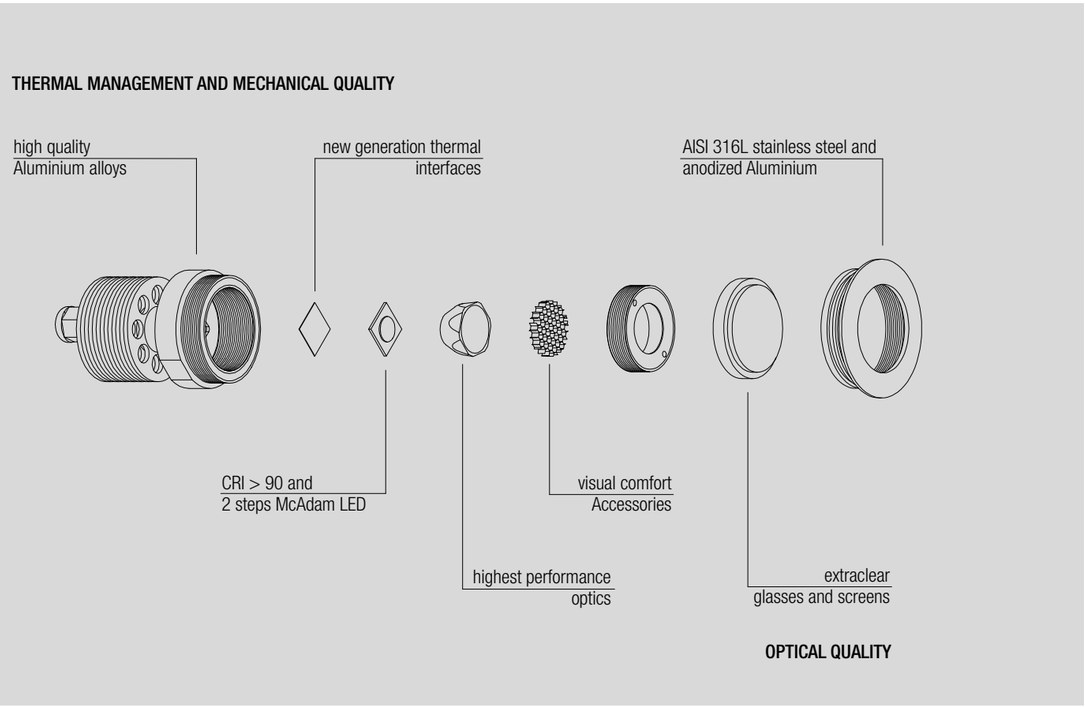

Minimize dimensions, maximise performance

Flexalighting arose from LED technology, and the aim is to fully exploit its most important and exclusive properties: efficiency, durability, but above all, dimensions. One of the most obvious things about a LED: it's tiny. And this has opened up new possibilities for product research: we want to build light into architecture, we want to reduce the compositional impact of lighting devices. When all is said and done, we want to offer light in its purest form.

Optical and manufacturing quality

Optical quality and manufacturing quality combine in high-level products: from scrupulous control of metal alloys and processing, to the selection of materials not subject to deterioration, to the use of the latest generation thermal interfaces, reliable, high-performance LEDs and optical trains of utmost optical quality: the technological mastery allows Flexalighting to manufacture products of the highest quality level.

Minimiser les dimensions, maximiser les prestations

Flexalighting a été créée autour de la technologie LED afin d'exploiter pleinement ses propriétés les plus importantes et exclusives: efficience, durée, mais surtout dimensions. Une des plus grandes particularités du LED: c'est qu'il est petit. Et cela a ouvert de nouvelles perspectives en termes de recherche de produit: nous souhaitons intégrer la lumière et l'architecture, nous souhaitons réduire l'impact de composition des appareils d'éclairage. Pour tout dire, nous souhaitons offrir la lumière dans toute sa pureté.

Qualité optique et qualité constructive

Qualité optique et qualité constructive se combinent en produits de haut niveau: du contrôle scrupuleux des alliages métalliques et des usinages, au choix de matériaux non sujets à dégradation, en passant par l'emploi d'interfaces thermiques de dernière génération, à l'emploi de LED fiables et performants et de trains optiques de la qualité optique maximale : la maîtrise technologique permet à Flexalighting de produire des appareils du meilleur niveau qualitatif.

Minimizar las dimensiones, maximizar las prestaciones

Flexalighting surgió en torno a la tecnología LED, para aprovechar completamente las propiedades más importantes y exclusivas: eficiencia, duración, pero, sobre todo, dimensiones. Una de las peculiaridades más evidentes del LED: es pequeño. Esto ha abierto nuevas perspectivas en la investigación del producto: queremos integrar la luz y la arquitectura, queremos reducir el impacto compositivo de los aparatos de iluminación. En resumen, queremos ofrecer la luz con toda su pureza.

Calidad óptica y calidad constructiva

Calidad óptica y calidad constructiva se combinan en productos de alto nivel: desde el control escrupuloso de las aleaciones metálicas y de los procesos, pasando por la selección de materiales no sujetos a corrosión, la utilización de interfaces térmicas de última generación, hasta llegar al empleo de LEDES fiables y eficientes y de trenes ópticos de la máxima calidad óptica: la maestría tecnológica permite a Flexalighting fabricar aparatos del más alto nivel cualitativo.



Flexalighting North America: designed in Italy and built in Canada for the North American market

To offer a fast, effective service that responds to the specific needs of the North American market, Flexalighting opened a production plant in the area of Vancouver, BC, Canada in 2017, where catalogue products are produced in compliance with ETL certifications. In continuous contact with the Italian parent company, Flexalighting North America develops a wide range of products able to meet Canadian and US installation standards, offering maximum technical and commercial assistance to customers.

Flexalighting North America: dessiné en Italie et fabriqué au Canada pour le marché nord-américain

Afin d'offrir un service rapide, efficace et capable de répondre aux exigences spécifiques du marché nord-américain, Flexalighting a ouvert, en 2017, une usine de production dans la zone de Vancouver, BC, Canada, où sont réalisés les produits du catalogue dans le respect des certifications ETL. Constamment en contact avec la maison mère italienne, Flexalighting North America développe une vaste proposition capable de répondre aux standards d'installation canadiens et américains et d'offrir la meilleure assistance technique et commerciale à la clientèle.

Flexalighting North America: diseñado en Italia y fabricado en Canadá para el mercado norteamericano

Con el fin de ofrecer un servicio rápido, eficaz y capaz de responder a las necesidades específicas del mercado norteamericano, Flexalighting inauguró, en 2017, una planta de producción en la zona de Vancouver, BC, Canadá, donde se fabrican los productos del catálogo de acuerdo con las certificaciones ETL. En contacto permanente con la casa matriz italiana, Flexalighting North America desarrolla una amplia gama de productos capaces de satisfacer las normas de instalación canadienses y norteamericanas, ofreciendo máxima asistencia técnica y comercial a los clientes.


FLUSH OPTIC DOWNLIGHTS

SKY

design: Roberto Mantovani

15 mm 0,6" IP20 Class 2






Flush optic downlight

0,75W · 250mA (V_f 2,9V) · Series wiring

CRI90 · 3-Step MacAdam

	250mA
2700K	**81 lm**
3000K	**81 lm**
3500K	**100 lm**
4000K	**107 lm**



Code Construction


SK X X X X

- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **1** 20° · **2** 40°
- **1** White · **5** Black · **C** Custom
- **1** Round · **2** Square

Accessories

AT064RO1015
Airtight recessed housing for insulated ceiling


IC064RO1015
Recessed housing for insulated ceiling



MP-R015
Baseplate



RO1015
T-bar baseplate



250mA Drivers


CCPRO10A-250 (1..12) IP20
Dimming: PHASE - 0-10V


CCPRO40A-250 (1..18) IP20
Dimming: PHASE - 0-10V

SELENE

design: Roberto Mantovani

30 mm 1,18" IP20 Class 2

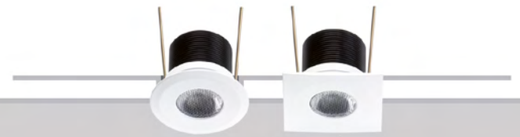




Flush optic downlight

1,5W · 500mA (V_f 2,9V) · Series wiring

CRI90 · 3-Step MacAdam

	500mA
2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**



Code Construction


SP X X X X

- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **0** 10° · **1** 25° · **2** 60°
- **1** White · **5** Black · **C** Custom
- **1** Round · **2** Square

Accessories

AT064RO1030
Airtight recessed housing for insulated ceiling


IC064RO1030
Recessed housing for insulated ceiling



MP-R030
Baseplate




RO1030
T-bar baseplate



500mA Drivers

CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V

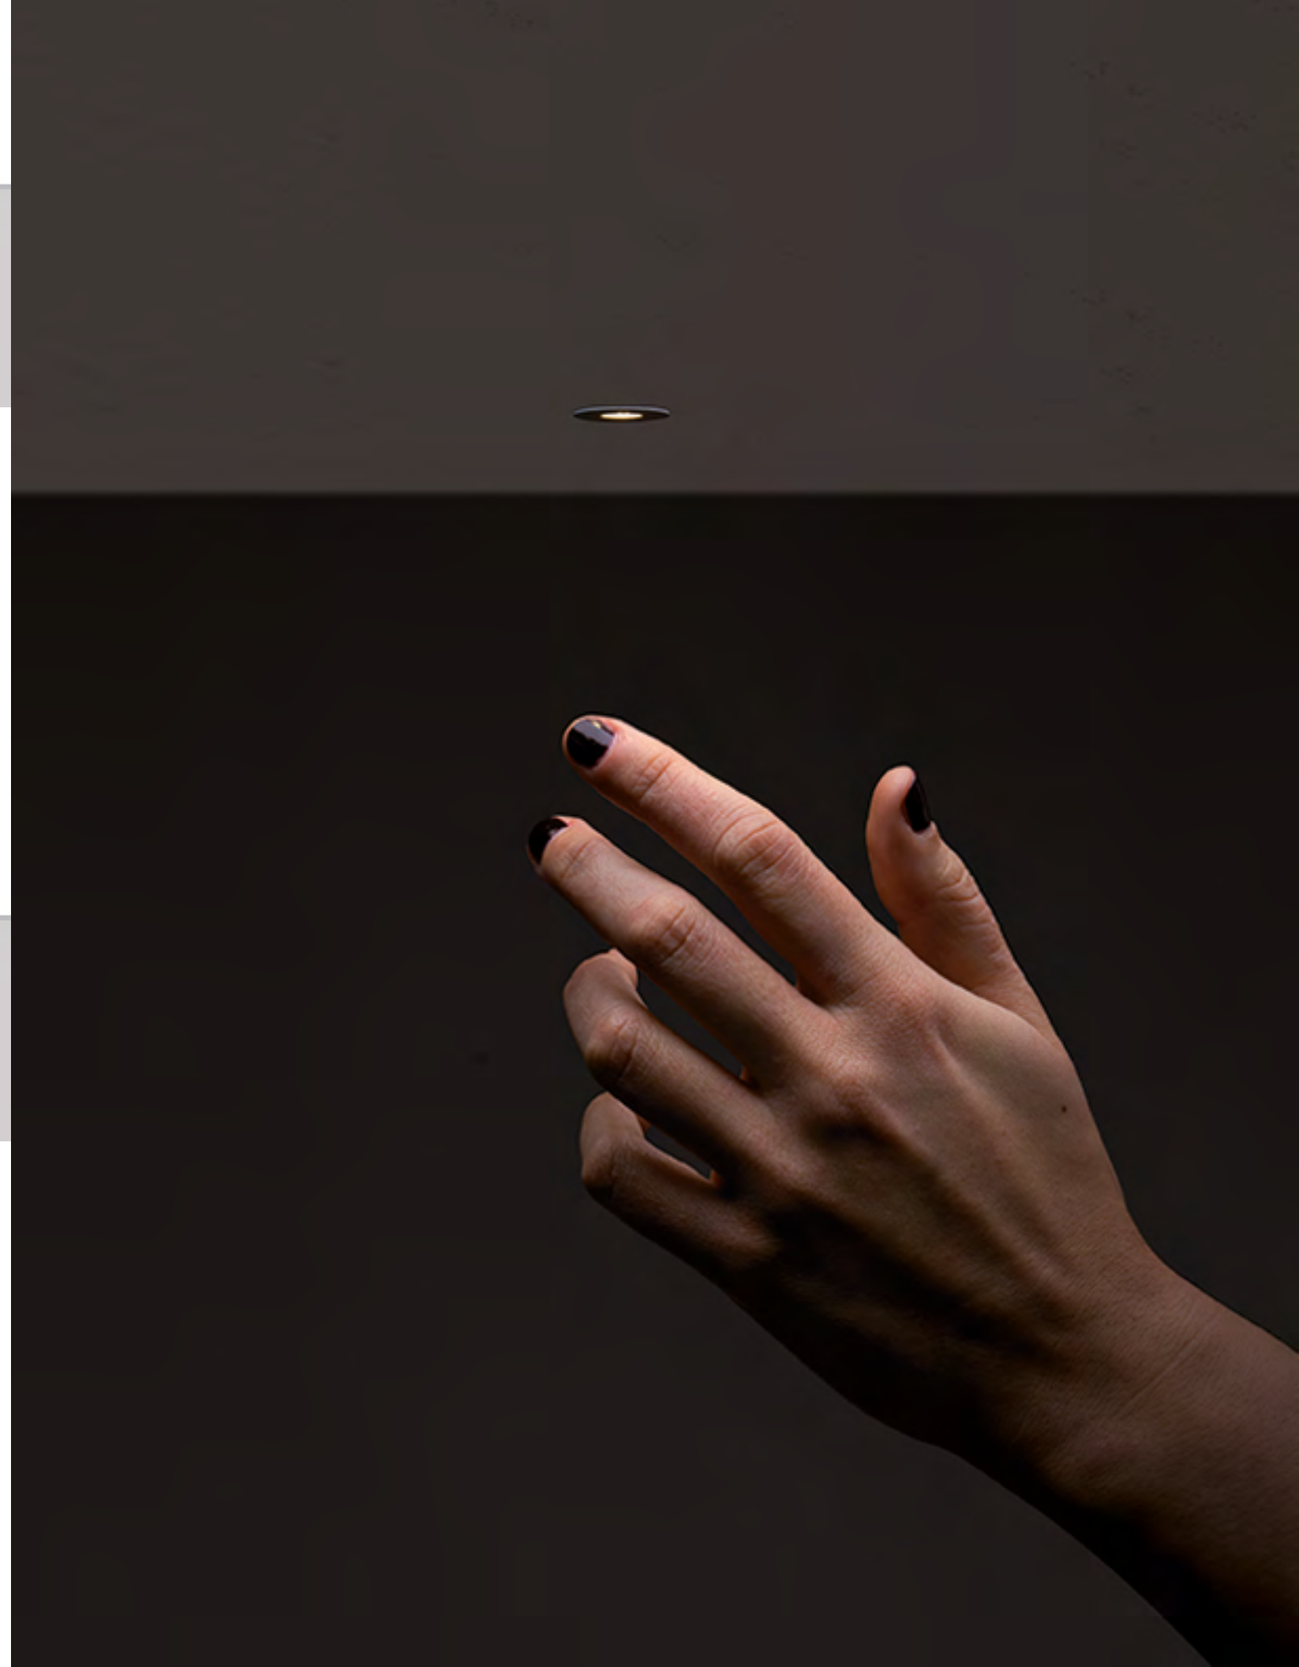



FLUSH OPTIC DOWNLIGHTS

KOL

design: Roberto Mantovani

30 mm 1,18" **IP20** **Class 2** **JA8**

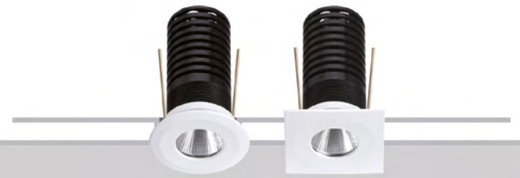




Flush optic downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring

Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction


PW X X X E

- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** 25° · **2** 45°
- **1** White · **5** Black · **C** Custom
- **1** Round · **2** Square

Accessories

AT064R01030
Airtight recessed housing for insulated ceiling


IC064R01030
Recessed housing for insulated ceiling



MP-R030
Baseplate



RO1030
T-bar baseplate



LH01
Low luminance hex louvre

Static White - 500mA Drivers


CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPR010A-250-DW (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

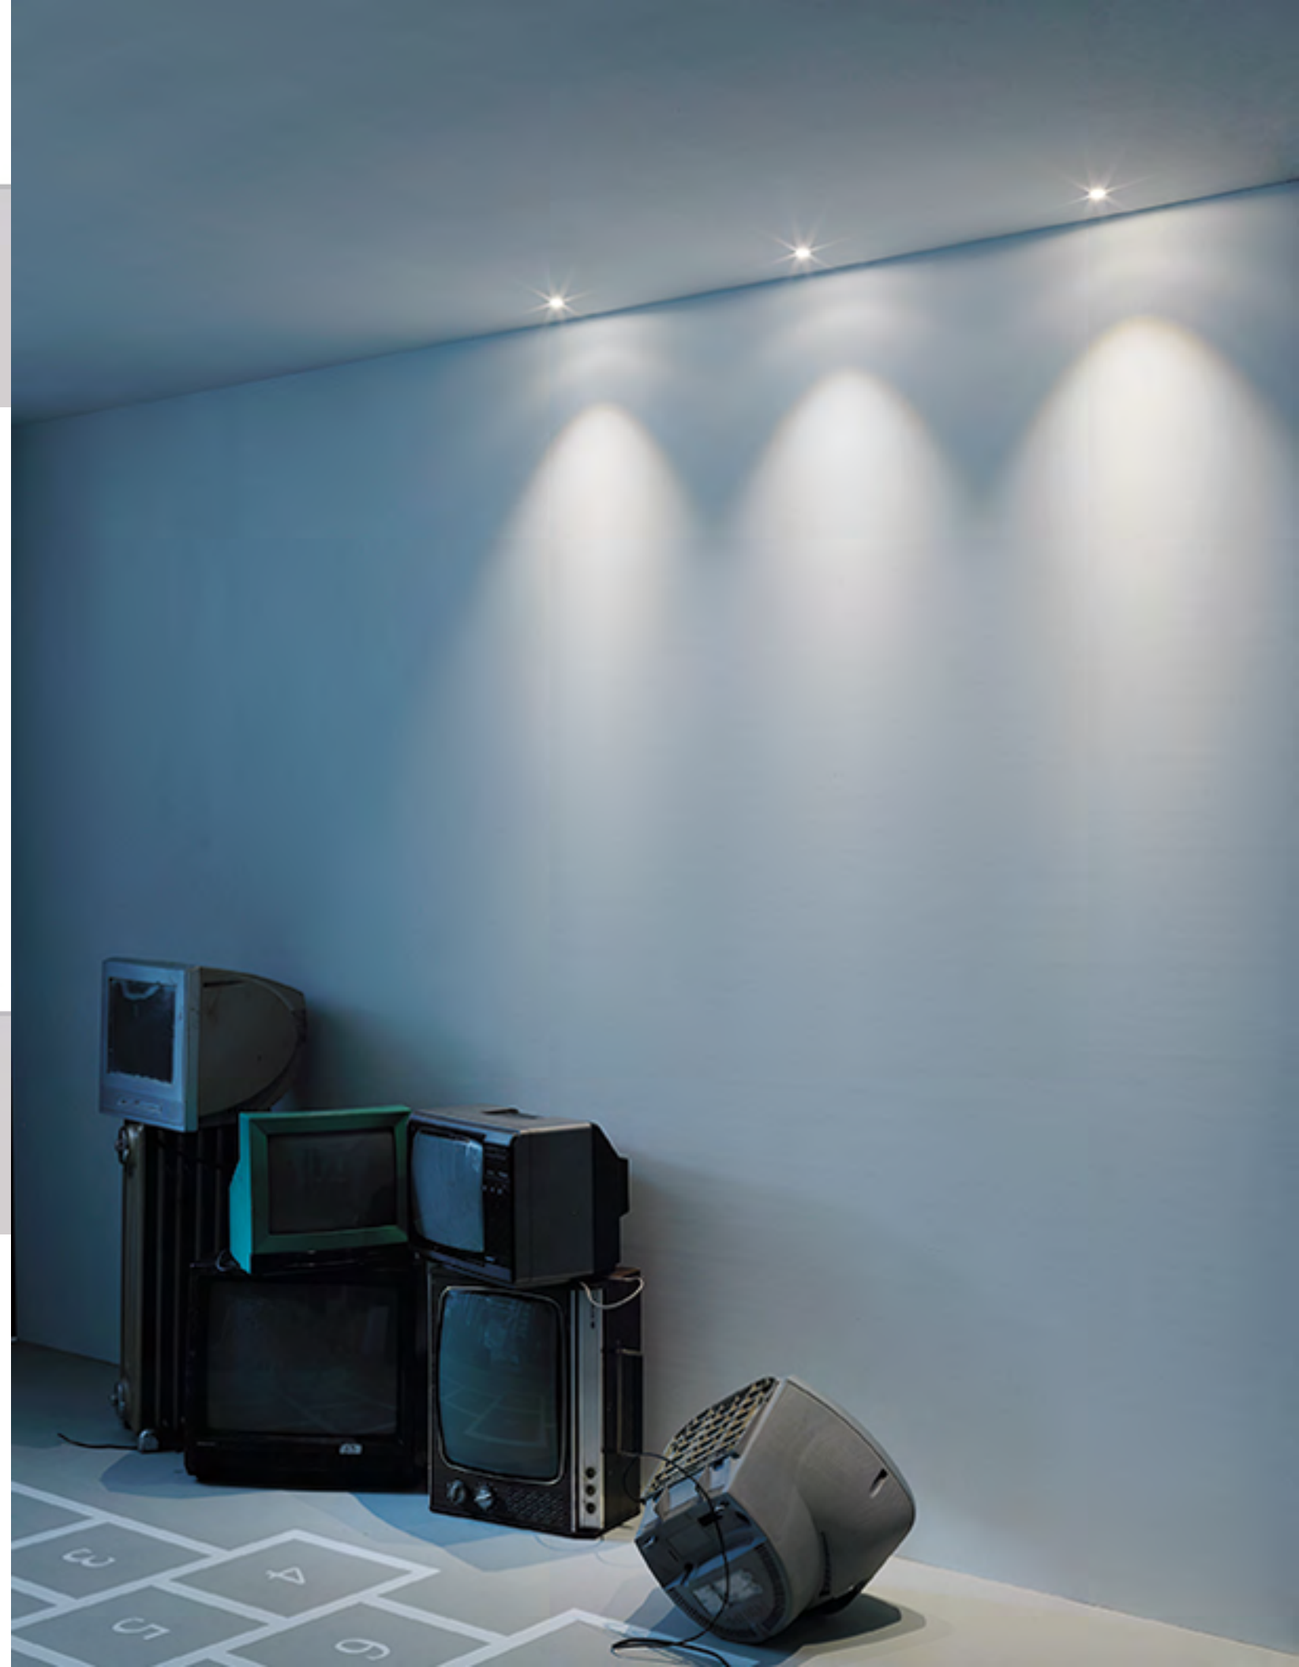


FLEXALIGHTING

FLEXUS 6

design: Rod&Todd

45 mm 1,77" **IP20** **Class 2** **JA8**






Flush optic downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring

Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**434 lm**	3500K	**586 lm**
2700K	**553 lm**	4000K	**579 lm**
3000K	**579 lm**	DW	**383 lm**



Code Construction


FX6 X X X X

- **N** 15° · **S** 24° · **M** 36° · **W** 60°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** White · **5** Black · **C** Custom
- **1** Round · **2** Square

Accessories

AT064R01045
Airtight recessed housing for insulated ceiling


IC064R01045
Recessed housing for insulated ceiling



MP-R045
Baseplate



RO1045
T-bar baseplate



LH03
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPR010A-250-DW (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V


FLUSH OPTIC DOWNLIGHTS

FLEXUS 10

design: Rod&Todd

55 mm 2,16" IP20 Class 2 JA8






Flush optic downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
Tunable White: 9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	770 lm	4000K	1178 lm
2700K	1125 lm	DW	667 lm
3000K	1180 lm	TW	875 lm
3500K	1195 lm		

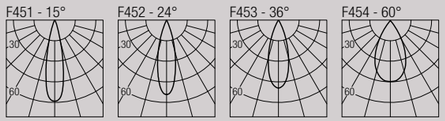

Code Construction


FX1 X X X X

N	S	M	W				
15°	24°	36°	60°				
24	**27**	**30**	**35**	**40**	**DW**	**TW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White	
1	**5**	**C**					
White	Black	Custom					
1	**2**						
Round	Square						

Accessories

AT064R01055
Airtight recessed housing for insulated ceiling


IC064R01055
Recessed housing for insulated ceiling



MP-R055
Baseplate



R01055
T-bar baseplate



LH04
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers

DL0561S1 (1..3) IP20
Dimming: 0-10V




FLEXUS 20

design: Rod&Todd

60 mm 2,36" IP20 Class 2






Flush optic downlight

18W · 500mA (V_f 36V)
CRI98 · 2-Step MacAdam

2700K	2165 lm
3000K	2279 lm
3500K	2498 lm
4000K	2423 lm

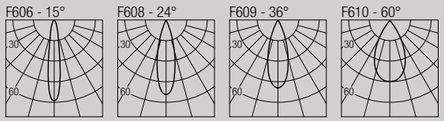

Code Construction


FX2 X X X

27	**30**	**35**	**40**	
2700K	3000K	3500K	4000K	
N	**S**	**M**	**W**	
15°	24°	36°	60°	
1	**5**	**C**		
White	Black	Custom		

Accessories

AT064R01060
Airtight recessed housing for insulated ceiling


IC064R01060
Recessed housing for insulated ceiling



MP-R060
Baseplate



R01060
T-bar baseplate



LH06
Low luminance hex louvre

500mA Drivers

CCPRO40A-500 (1) IP20
Dimming: PHASE - 0-10V




FLEXALIGHTING


FLUSH OPTIC DOWNLIGHTS

TAG

design: Roberto Mantovani

45 mm 1,77" IP20 Class 2

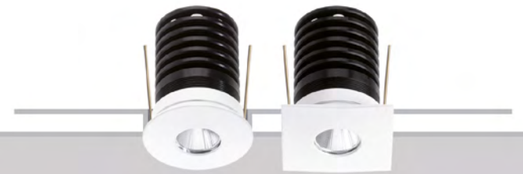




Flush optic downlight

7,5W · 24VDC · Parallel wiring
CRI98 · 2-Step MacAdam

2400K	**487 lm**
2700K	**655 lm**
3000K	**688 lm**
3500K	**697 lm**
4000K	**686 lm**




Code Construction

TA X X X X

- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **S** 36° · **M** 46° · **W** 60°
- **1** White · **5** Black · **C** Custom
- **1** Round · **2** Square

Accessories

AT064R01045
Airtight recessed housing for insulated ceiling




IC064R01045
Recessed housing for insulated ceiling

MP-R045
Baseplate



RO1045
T-bar baseplate



LH01
Low luminance hex louvre

24 VDC Drivers

DLM.30 (1..3) IP20
Dimming: PHASE - 0-10V

DLM.60 (1..7) IP20
Dimming: PHASE - 0-10V

DLM.100 (1..12) IP20
Dimming: PHASE - 0-10V




BACK

BYE

design: Roberto Mantovani


20 mm 0,8" IP20 Class 2





Recessed optic downlight

0,75W · 250mA (V_f 2,9V) · Series wiring
CRI90 · 3-Step MacAdam



Code Construction


BY1 X X X

- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **1** 20° · **2** 40°
- **1** White · **5** Black · **C** Custom

Accessories

AT064R01020
Airtight recessed housing for insulated ceiling


IC064R01020
Recessed housing for insulated ceiling



MP-R020
Baseplate



R01020
T-bar baseplate



250mA Drivers

CCPR010A-250 (1..12) IP20
Dimming: PHASE - 0-10V

CCPR040A-250 (1..18) IP20
Dimming: PHASE - 0-10V




BABA R2

design: Roberto Mantovani


30 mm 1,18" IP20 Class 2





Recessed optic downlight

1,5W · 500mA (V_f 2,9V) · Series wiring
CRI90 · 3-Step MacAdam

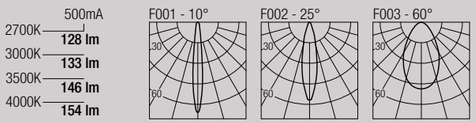

Code Construction


BS1 X X X

- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **0** 10° · **1** 25° · **2** 60°
- **1** White · **5** Black · **C** Custom

Accessories

AT064R01030
Airtight recessed housing for insulated ceiling


IC064R01030
Recessed housing for insulated ceiling



MP-R030
Baseplate



R01030
T-bar baseplate



500mA Drivers

CCPR010A-500 (1..6) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..18) IP20
Dimming: PHASE - 0-10V


RECESSED OPTIC DOWNLIGHTS

BABA Q2

design: Jude Allen

36 mm 1,42" **IP20** **Class 2**





Recessed optic downlight

1,5W · 500mA (V_f 2,9V) · Series wiring

CRI90 · 3-Step MacAdam

	500mA
2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**



Code Construction


BS2 X X X

	27	**30**	**35**	**40**
	2700K	3000K	3500K	4000K
0	**1**	**2**		
10°	25°	60°		
1	**5**	**C**		
White	Black	Custom		

Accessories

AT064R01036
Airtight recessed housing for insulated ceiling


IC064R01036
Recessed housing for insulated ceiling



MP-R036
Baseplate



R01036
T-bar baseplate



500mA Drivers

CCPR010A-500 (1..6) IP20
Dimming: PHASE - 0-10V


CCPR040A-500 (1..18) IP20
Dimming: PHASE - 0-10V

BABA R6

design: Roberto Mantovani

30 mm 1,18" **IP20** **Class 2** **JA8**






Recessed optic downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring

Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction


BW1 X X X E

	24	**27**	**30**	**35**	**40**	**DW**
	2400K	2700K	3000K	3500K	4000K	Dim to Warm
1	**2**					
25°	45°					
1	**5**	**C**				
White	Black	Custom				

Accessories

AT064R01030
Airtight recessed housing for insulated ceiling


IC064R01030
Recessed housing for insulated ceiling



MP-R030
Baseplate



R01030
T-bar baseplate



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPR010A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V


BACK

BABA Q6

design: Jude Allen

36 mm 1,42" IP20 Class 2 JA8






Recessed optic downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**




Code Construction

BW2 X X X E

- 1st X: **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- 2nd X: **1** 25° · **2** 45°
- 3rd X: **1** White · **5** Black · **C** Custom

Accessories

AT064R01036
Airtight recessed housing for insulated ceiling




IC064R01036
Recessed housing for insulated ceiling

MP-R036
Baseplate



R01036
T-bar baseplate



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPR010A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

BABA R10

design: Jude Allen

50 mm 1,97" IP20 Class 2 JA8








Recessed optic downlight


Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
Tunable White: 9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**744 lm**	4000K	**1139 lm**
2700K	**1088 lm**	DW	**645 lm**
3000K	**1142 lm**	TW	**847 lm**
3500K	**1156 lm**		










Code Construction

BW4 X X 9 X

- 1st X: **1** 15° · **2** 30° · **3** 45° · **4** 60°
- 2nd X: **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm · **TW** Tunable White
- 3rd X: **1** White · **5** Black · **C** Custom

Accessories

AT064R01051
Airtight recessed housing for insulated ceiling




IC064R01051
Recessed housing for insulated ceiling

MP-R051
Baseplate



R01051
T-bar baseplate



LH02
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers

DL0561S1 (1..3) IP20
Dimming: 0-10V


BACK

BABA Q10

design: Jude Allen

50 mm 1,97" **IP20** **Class 2** **JA8**






Recessed optic downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
Tunable White: 9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**744 lm**	4000K	**1139 lm**
2700K	**1088 lm**	DW	**645 lm**
3000K	**1142 lm**	TW	**847 lm**
3500K	**1156 lm**		



Code Construction


BW10 X X X

1	**2**	**3**	**4**				
15°	30°	45°	60°				
24	**27**	**30**	**35**	**40**	**DW**	**TW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White	
1	**5**	**C**					
White	Black	Custom					

Accessories

AT064RO1051
Airtight recessed housing for insulated ceiling


IC064RO1051
Recessed housing for insulated ceiling



MP-R051
Baseplate



RO1051
T-bar baseplate



LH02
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers


DL0561S1 (1..3) IP20
Dimming: 0-10V

FRANNY 6

design: Rod&Todd

45 mm 1,77" **IP20** **Class 2** **JA8**






Recessed optic downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**434 lm**	3500K	**586 lm**
2700K	**553 lm**	4000K	**579 lm**
3000K	**579 lm**	DW	**383 lm**



Code Construction


FN6 X X X X

N	**S**	**M**	**W**			
15°	24°	36°	60°			
24	**27**	**30**	**35**	**40**	**DW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	
1	**5**	**C**				
White	Black	Custom				
1	**2**					
Round	Square					

Accessories

AT064RO1045
Airtight recessed housing for insulated ceiling


IC064RO1045
Recessed housing for insulated ceiling



MP-R045
Baseplate



RO1045
T-bar baseplate



LH03
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V


RECESSED OPTIC DOWNLIGHTS

FRANNY 10

design: Rod&Todd

55 mm 2,16" IP20 Class 2 JA8






Recessed optic downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
Tunable White: 9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	770 lm	4000K	1178 lm
2700K	1125 lm	DW	667 lm
3000K	1180 lm	TW	875 lm
3500K	1195 lm		




Code Construction

FN1 X X X X

N	S	M	W				
15°	24°	36°	60°				
24	27	30	35	40	DW	TW	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White	
1	5	C					
White	Black	Custom					
1	2						
Round	Square						

Accessories

AT064RO1055
Airtight recessed housing for insulated ceiling




IC064RO1055
Recessed housing for insulated ceiling

MP-R055
Baseplate



RO1055
T-bar baseplate



LH04
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers


DL0561S1 (1..3) IP20
Dimming: 0-10V

FRANNY 20

design: Rod&Todd

65 mm 2,56" IP20 Class 2






Recessed optic downlight

18W · 500mA (V_f 36V)
CRI98 · 2-Step MacAdam

2700K	2165 lm
3000K	2279 lm
3500K	2498 lm
4000K	2423 lm




Code Construction

FN2 X X X

27	30	35	40	
2700K	3000K	3500K	4000K	
N	S	M	W	
15°	24°	36°	60°	
1	5	C		
White	Black	Custom		

Accessories

AT086RO2065
Airtight recessed housing for insulated ceiling




IC086RO2065
Recessed housing for insulated ceiling

MP-R065
Baseplate



RO2065
T-bar baseplate



LH06
Low luminance hex louvre

500mA Drivers

CCPRO40A-500 (1) IP20
Dimming: PHASE - 0-10V


RECESSED OPTIC DOWNLIGHTS

WIM 6

design: Jude Allen

45 mm 1,77" **IP20** **Class 2** **JA8**






Recessed optic downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**434 lm**	3500K	**586 lm**
2700K	**553 lm**	4000K	**579 lm**
3000K	**579 lm**	DW	**383 lm**



Code Construction


WM6 X X X

- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** 15° · **2** 24° · **3** 36° · **4** 60°
- **1** White · **5** Black · **C** Custom

Accessories

AT064RO1055
Airtight recessed housing for insulated ceiling


IC064RO1055
Recessed housing for insulated ceiling



MP-R045
Baseplate



RO1045
T-bar baseplate



LH03
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

WIM 10

design: Jude Allen

55 mm 2,16" **IP20** **Class 2** **JA8**






Recessed optic downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
Tunable White: 9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**770 lm**	4000K	**1178 lm**
2700K	**1125 lm**	DW	**667 lm**
3000K	**1180 lm**	TW	**875 lm**
3500K	**1195 lm**		



Code Construction


WM10 X X X

- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm · **TW** Tunable White
- **1** 15° · **2** 24° · **3** 36° · **4** 60°
- **1** White · **5** Black · **C** Custom

Accessories

AT064RO1055
Airtight recessed housing for insulated ceiling


IC064RO1055
Recessed housing for insulated ceiling



MP-R055
Baseplate



RO1055
T-bar baseplate



LH04
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers


DL0561S1 (1..3) IP20
Dimming: 0-10V


RECESSED OPTIC DOWNLIGHTS

KORINE 10

design: Jude Allen

50 mm / 1,97" IP20 Class 2 JA8

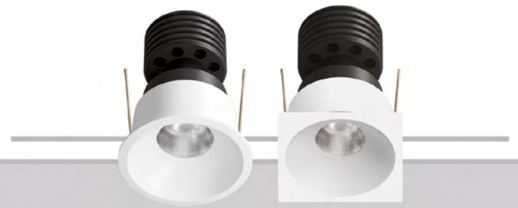




Recessed optic downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
Tunable White: 9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**744 lm**	4000K	**1139 lm**
2700K	**1088 lm**	DW	**645 lm**
3000K	**1142 lm**	TW	**847 lm**
3500K	**1156 lm**		




Code Construction

KR10 X X X X

- **1** Round, **2** Square
- **24** 2400K, **27** 2700K, **30** 3000K, **35** 3500K, **40** 4000K, **DW** Dim to Warm, **TW** Tunable White
- **N** 15°, **S** 24°, **M** 36°, **W** 60°
- **1** White, **5** Black, **C** Custom

Accessories

AT064R01051
Airtight recessed housing for insulated ceiling




IC064R01051
Recessed housing for insulated ceiling

MP-R051
Baseplate



R01051
T-bar baseplate



LH02
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers

DL0561S1 (1..3) IP20
Dimming: 0-10V




FLEXALIGHTING

NEIL

design: Roberto Mantovani

45 mm / 1,77" IP20 Class 2






Recessed optic downlight

7,5W · 24VDC · Parallel wiring
CRI98 · 2-Step MacAdam

2400K	**487 lm**
2700K	**655 lm**
3000K	**588 lm**
3500K	**697 lm**
4000K	**686 lm**




Code Construction

NL X X 9 X

- **S** 36°, **M** 46°, **W** 60°
- **24** 2400K, **27** 2700K, **30** 3000K, **35** 3500K, **40** 4000K
- **1** White, **5** Black, **C** Custom

Accessories

AT064R01051
Airtight recessed housing for insulated ceiling




IC064R01051
Recessed housing for insulated ceiling

MP-R045
Baseplate



R01045
T-bar baseplate



LH01
Low luminance hex louvre

24 VDC Drivers

DLM.30 (1..3) IP20
Dimming: PHASE - 0-10V

DLM.60 (1..7) IP20
Dimming: PHASE - 0-10V


DLM.100 (1..12) IP20
Dimming: PHASE - 0-10V


BACK

BLACK 2

design: Lapo Grassellini

30 mm 1,18" **IP20** **Class 2**

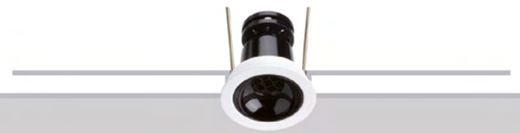




Recessed optic downlight

1,5W · 500mA (V_f 2,9V) · Series wiring
CRI90 · 3-Step MacAdam

	500mA
2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**



Code Construction


BK1 X X X

- **S** 20° — **M** 35° — **W** 45°
- **27** 2700K — **30** 3000K — **35** 3500K — **40** 4000K
- **1** White — **5** Black — **C** Custom

Accessories

AT064R01030
Airtight recessed housing for insulated ceiling


IC064R01030
Recessed housing for insulated ceiling



MP-R030
Baseplate



R01030
T-bar baseplate



500mA Drivers

CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V


CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V

BLACK 6

design: Lapo Grassellini

45 mm 1,77" **IP20** **Class 2** **JA8**






Recessed optic downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction


BK2 X X X

- **S** 25° — **M** 45°
- **24** 2400K — **27** 2700K — **30** 3000K — **35** 3500K — **40** 4000K — **DW** Dim to Warm
- **1** White — **5** Black — **C** Custom

Accessories

AT064R01045
Airtight recessed housing for insulated ceiling


IC064R01045
Recessed housing for insulated ceiling



MP-R045
Baseplate



R01045
T-bar baseplate



Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V


RECESSED OPTIC DOWNLIGHTS

BLACK 10

design: Lapo Grassellini

55 mm / 2,16" IP20 Class 2 JA8






Recessed optic downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
Tunable White: 9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	728 lm	4000K	1114 lm
2700K	1064 lm	DW	630 lm
3000K	1116 lm	TW	828 lm
3500K	1130 lm		



Code Construction


BK3 X X 9 X

S	**M**	**W**				
36°	46°	60°				
24	**27**	**30**	**35**	**40**	**DW**	**TW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White
1	**5**	**C**				
White	Black	Custom				

Accessories

AT064R01055
Airtight recessed housing for insulated ceiling


IC064R01055
Recessed housing for insulated ceiling



MP-R055
Baseplate



R01055
T-bar baseplate



Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers

DL0561S1 (1..3) IP20
Dimming: 0-10V




FLEXALIGHTING

HAP 110

design: Lapo Grassellini

57x57 mm / 2,24x2,24" IP20 Class 2 JA8






Recessed optic downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
Tunable White: 9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	728 lm	4000K	1114 lm
2700K	1064 lm	DW	630 lm
3000K	1116 lm	TW	828 lm
3500K	1130 lm		



Code Construction


HP11 X X 9 X

S	**M**	**W**				
36°	46°	60°				
24	**27**	**30**	**35**	**40**	**DW**	**TW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White
1	**5**	**C**				
White	Black	Custom				


Accessories

AT086Q02058
Airtight recessed housing for insulated ceiling


IC086Q02058
Recessed housing for insulated ceiling



MP-Q058
Baseplate



Q02058
T-bar baseplate



L0H1B (Black)
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers

DL0561S1 (1..3) IP20
Dimming: 0-10V


RECESSED OPTIC DOWNLIGHTS

HAP 120

design: Lapo Grassellini

108x57 mm
4,25x2,24"
IP20 Class 2 JA8






Recessed optic downlight

Static White: 2x9W · 500mA (V_f 2x18V) · Series wiring
Dim to Warm: 2x7,2W · 400mA (V_f 2x18V) · Series wiring
Tunable White: 2x9W · 500mA (V_f 2x18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	1456 lm	4000K	2228 lm
2700K	2128 lm	DW	1260 lm
3000K	2232 lm	TW	1656 lm
3500K	2260 lm		




Code Construction

HP12 X X 9 X

	S	M	W				
	36°	46°	60°				
24	27	30	35	40	DW	TW	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White	
1	5	C					
White	Black	Custom					


Accessories

AT086X02108
Airtight recessed housing for insulated ceiling




IC086X02108
Recessed housing for insulated ceiling

MP-X108
Baseplate



X02108
T-bar baseplate



2xL0H1B (Black)
Low luminance hex louvre

Static White - 500mA Drivers

(2x) CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

(2x) CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers


DL0561S1 (1) IP20
Dimming: 0-10V

HAP 140

design: Lapo Grassellini

208x57 mm
8,19x2,24"
IP20 Class 2 JA8






Recessed optic downlight

Static White: 4x9W · 500mA (V_f 4x18V) · Series wiring
Dim to Warm: 4x7,2W · 400mA (V_f 4x18V) · Series wiring
Tunable White: 4x9W · 500mA (V_f 4x18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	2912 lm	4000K	4456 lm
2700K	4246 lm	DW	2520 lm
3000K	4464 lm	TW	3312 lm
3500K	4524 lm		




Code Construction

HP14 X X 9 X

	S	M	W				
	36°	46°	60°				
24	27	30	35	40	DW	TW	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White	
1	5	C					
White	Black	Custom					

Accessories

AT127X03208
Airtight recessed housing for insulated ceiling




IC127X03208
Recessed housing for insulated ceiling

MP-X208
Baseplate



X03208
T-bar baseplate



4xL0H1B (Black)
Low luminance hex louvre

Static White - 500mA Drivers

(4x) CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

(2x) CCPR040A-500 (1) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

(4x) CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

(2x) CCPR040A-400 (1) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers


(2x) DL0561S1 (1) IP20
Dimming: 0-10V

HAP 130

design: Lapo Grassellini

158x57 mm
6,22x2,24"
IP20 Class 2 JA8






Recessed optic downlight

Static White: 3x9W · 500mA (V_f 3x18V) · Series wiring
Dim to Warm: 3x7,2W · 400mA (V_f 3x18V) · Series wiring
Tunable White: 3x9W · 500mA (V_f 3x18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	2184 lm	4000K	3342 lm
2700K	3192 lm	DW	1890 lm
3000K	3348 lm	TW	2484 lm
3500K	3393 lm		




Code Construction

HP13 X X 9 X

	S	M	W				
	36°	46°	60°				
24	27	30	35	40	DW	TW	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White	
1	5	C					
White	Black	Custom					

Accessories

AT127X03158
Airtight recessed housing for insulated ceiling




IC127X03158
Recessed housing for insulated ceiling

MP-X158
Baseplate



X03158
T-bar baseplate



3xL0H1B (Black)
Low luminance hex louvre

Static White - 500mA Drivers

(3x) CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

(3x) CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers


DL0561S1 (1) IP20
Dimming: 0-10V

ZED

design: Roberto Mantovani

45 mm
1,77"
IP20 Class 2





Recessed optic downlight

1,5W · 500mA (V_f 2,9V) · Series wiring
CRI90 · 3-Step MacAdam

	500mA
2700K	128 lm
3000K	133 lm
4200K	154 lm




Code Construction

ZD X X 3

			Beam angle 3°
0	1	2	
2700K	3000K	4200K	
1	5		
White	Black		


Accessories

AT064R01045
Airtight recessed housing for insulated ceiling




IC064R01045
Recessed housing for insulated ceiling

MP-R045
Baseplate



R01045
T-bar baseplate



500mA Drivers

CCPR010A-500 (1..6) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..18) IP20
Dimming: PHASE - 0-10V


RECESSED OPTIC DOWNLIGHTS

TASK 10

design: Roberto Mantovani

60 mm 2,36" **IP20** **Class 2**






Recessed optic downlight

9W · 500mA (V_f 18V)

CRI98 · 2-Step MacAdam

2400K	**619 lm**
2700K	**904 lm**
3000K	**949 lm**
3500K	**961 lm**
4000K	**947 lm**



Code Construction

TW X X 9 1


Beam angle 10°

24	**27**	**30**	**35**	**40**
2400K	2700K	3000K	3500K	4000K

1	**5**	**C**
White	Black	Custom

Accessories

AT064R01060
Airtight recessed housing for insulated ceiling




IC064R01060
Recessed housing for insulated ceiling

MP-R060
Baseplate



R01060
T-bar baseplate



Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V


CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

BACK

ZERINO

design: Roberto Mantovani


IP20 Class 2




Trimless downlight

0,75W · 250mA (V_f 2,9V) · Series wiring

CRI90 · 3-Step MacAdam



250mA	
2700K	**81 lm**
3000K	**81 lm**
3500K	**100 lm**
4000K	**107 lm**




Code Construction

ZK1 X X X

- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **1** 20° · **2** 40°
- **1** White · **5** Black · **C** Custom

Accessories

AT064RO1030
Airtight recessed housing for insulated ceiling




IC064RO1030
Recessed housing for insulated ceiling

MP-R030
Baseplate



RO1030
T-bar baseplate



ZQC00K White
Plasterboard recessing frame



ZQC00K.BMK-WH White
ZQC00K.BMK-BLK Black
ZQC00K.BMK-CU Custom
Backmount frame for hard surfaces



250mA Drivers

CCPRO10A-250 (1..12) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250 (1..18) IP20
Dimming: PHASE - 0-10V

ZERO R2

design: Roberto Mantovani


IP20 Class 2



Trimless downlight

1,5W · 500mA (V_f 2,9V) · Series wiring

CRI90 · 3-Step MacAdam



500mA	
2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**




Code Construction

ZS1 X X X

- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **0** 10° · **1** 25° · **2** 60°
- **1** White · **5** Black · **C** Custom

Accessories

AT064RO1045
Airtight recessed housing for insulated ceiling




IC064RO1045
Recessed housing for insulated ceiling

MP-R045
Baseplate



RO1045
T-bar baseplate



ZQC001 White
Plasterboard recessing frame



ZQC001.BMK-WH White
ZQC001.BMK-BLK Black
ZQC001.BMK-CU Custom
Backmount frame for hard surfaces



LH01
Low luminance hex louvre

500mA Drivers

CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V


TRIMLESS DOWNLIGHTS

ZERO Q2

design: Roberto Mantovani

IP20 **Class 2**






Trimless downlight

1,5W · 500mA (V_f 2,9V) · Series wiring

CRI90 · 3-Step MacAdam

500mA

2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**



Code Construction


ZS2 X X X

- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **0** 10° · **1** 25° · **2** 60°
- **1** White · **5** Black · **C** Custom

Accessories

AT064Q01040
Airtight recessed housing for insulated ceiling


IC064Q01040
Recessed housing for insulated ceiling




MP-Q040
Baseplate



Q01040
T-bar baseplate



ZQC002 White
Plasterboard recessing frame



LH01
Low luminance hex louvre

500mA Drivers

CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V


CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V

ZERO R6

design: Roberto Mantovani

IP20 **Class 2** **JA8**






Trimless downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring

Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction


ZW1 X X X

- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** 25° · **2** 45°
- **1** White · **5** Black · **C** Custom

Accessories

AT064R01045
Airtight recessed housing for insulated ceiling


IC064R01045
Recessed housing for insulated ceiling



MP-R045
Baseplate




R01045
T-bar baseplate



ZQC001 White
Plasterboard recessing frame



ZQC001.BMK-WH White
ZQC001.BMK-BLK Black
ZQC001.BMK-CU Custom
Backmount frame for hard surfaces



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V


TRIMLESS DOWNLIGHTS

ZERO Q6

design: Roberto Mantovani

IP20 Class 2 **JA8**

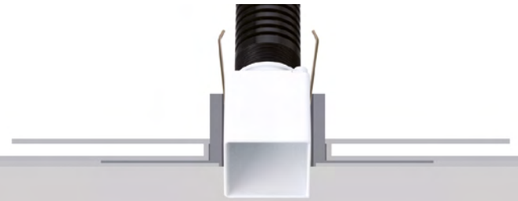




Trimless downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**




Code Construction

ZW2 X X X

- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** 25° · **2** 45°
- **1** White · **5** Black · **C** Custom

Accessories

AT064Q01040
Airtight recessed housing for insulated ceiling




IC064Q01040
Recessed housing for insulated ceiling


MP-Q040
Baseplate



Q01040
T-bar baseplate



ZQC002 White
Plasterboard recessing frame



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPR010A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V


ZERO R10

design: Jude Allen

IP20 Class 2 **JA8**




Trimless downlight



Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
Tunable White: 9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**744 lm**	4000K	**1139 lm**
2700K	**1088 lm**	DW	**645 lm**
3000K	**1142 lm**	TW	**847 lm**
3500K	**1156 lm**		

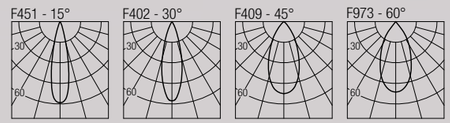


Code Construction

ZR1 X X 9 X

- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm · **TW** Tunable White
- **1** 15° · **2** 30° · **3** 45° · **4** 60°
- **1** White · **5** Black · **C** Custom

Accessories

AT064R01060
Airtight recessed housing for insulated ceiling




IC064R01060
Recessed housing for insulated ceiling

MP-R060
Baseplate




R01060
T-bar baseplate



ZQC005 White
Plasterboard recessing frame



ZQC005.BMK-WH White
ZQC005.BMK-BLK Black
ZQC005.BMK-CU Custom
Backmount frame for hard surfaces



LH02
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers

DL0561S1 (1..3) IP20
Dimming: 0-10V


TRIMLESS DOWNLIGHTS

ZERO MOVE 2

design: Roberto Mantovani

IP20 Class 2







Trimless & adjustable downlight

1,5W · 500mA (V_f 2,9V) · Series wiring

CRI90 · 3-Step MacAdam





Code Construction


ZSM X X X

- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **0** 10° · **1** 25° · **2** 60°
- **1** White · **5** Black · **C** Custom

Accessories

AT064R01055
Airtight recessed housing for insulated ceiling


IC064R01055
Recessed housing for insulated ceiling




MP-R055
Baseplate



RO1055
T-bar baseplate



ZQM001 White
Plasterboard recessing frame



500mA Drivers

CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V




ZERO MOVE 6

design: Roberto Mantovani

IP20 Class 2 **JA8**






Trimless & adjustable downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring

Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam





Code Construction


ZWM X X X

- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** 25° · **2** 45°
- **1** White · **5** Black · **C** Custom

Accessories

AT064R01055
Airtight recessed housing for insulated ceiling


IC064R01055
Recessed housing for insulated ceiling




MP-R055
Baseplate



RO1055
T-bar baseplate



ZQM001 White
Plasterboard recessing frame



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V


BACK

ZED TRIMLESS

design: Roberto Mantovani

IP20 **Class 2**

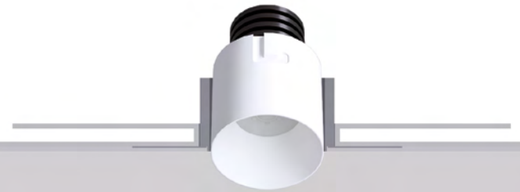




Trimless downlight

1,5W · 500mA (V_f 2,9V) · Series wiring
CRI90 · 3-Step MacAdam

500mA

2700K — **128 lm**
3000K — **133 lm**
4000K — **154 lm**



Code Construction

DID X X 3

Beam angle 3°


0 2700K | **1** 3000K | **2** 4200K

1 White | **5** Black | **C** Custom

Accessories

AT064R01070
Airtight recessed housing for insulated ceiling


IC064R01070
Recessed housing for insulated ceiling



MP-R070
Baseplate




R01070
T-bar baseplate



ZTC10U White
Plasterboard recessing frame



ZTC10U.BMK-WH White
ZTC10U.BMK-BLK Black
ZTC10U.BMK-CU Custom
Backmount frame for hard surfaces



500mA Drivers

CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V


CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V

NONE Q10

design: Roberto Mantovani

IP20 **Class 2**






Trimless downlight

9W · 500mA (V_f 18V)
CRI98 · 2-Step MacAdam

2400K — **619 lm**
2700K — **904 lm**
3000K — **949 lm**
3500K — **961 lm**
4000K — **947 lm**



Code Construction

NQW X X 9 1


Beam angle 10°

24 2400K | **27** 2700K | **30** 3000K | **35** 3500K | **40** 4000K

1 White | **5** Black | **C** Custom


Accessories

AT086Q02080
Airtight recessed housing for insulated ceiling




IC086Q02080
Recessed housing for insulated ceiling


MP-Q080
Baseplate



Q02080
T-bar baseplate



ZQC004 White
Plasterboard recessing frame



Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V


CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

NONE R10

design: Roberto Mantovani

IP20 **Class 2**





Trimless downlight

9W · 500mA (V_f 18V)
CRI98 · 2-Step MacAdam

2400K — **619 lm**
2700K — **904 lm**
3000K — **949 lm**
3500K — **961 lm**
4000K — **947 lm**



Code Construction

NRW X X 9 1

Beam angle 10°


24 2400K | **27** 2700K | **30** 3000K | **35** 3500K | **40** 4000K

1 White | **5** Black | **C** Custom

Accessories

AT064R01070
Airtight recessed housing for insulated ceiling


IC064R01070
Recessed housing for insulated ceiling



MP-R070
Baseplate




R01070
T-bar baseplate



ZQC003 White
Plasterboard recessing frame



ZQC003.BMK-WH White
ZQC003.BMK-BLK Black
ZQC003.BMK-CU Custom
Backmount frame for hard surfaces



Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V


CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

HOLE

design: Roberto Mantovani

IP20 **Class 2**






Trimless downlight

7,5W · 24VDC · Parallel wiring
CRI98 · 2-Step MacAdam

2400K — **487 lm**
2700K — **655 lm**
3000K — **688 lm**
3500K — **697 lm**
4000K — **686 lm**



Code Construction

HH X X 9 X


S 36° | **M** 46° | **W** 60°

24 2400K | **27** 2700K | **30** 3000K | **35** 3500K | **40** 4000K

1 White | **5** Black | **C** Custom

Accessories

AT064R01055
Airtight recessed housing for insulated ceiling




IC064R01055
Recessed housing for insulated ceiling

MP-R055
Baseplate



R01055
T-bar baseplate



ZQH001 White
Plasterboard recessing frame



ZQH001.BMK-WH White
ZQH001.BMK-BLK Black
ZQH001.BMK-CU Custom
Backmount frame for hard surfaces



LH01
Low luminance hex louvre

24 VDC Drivers

DLM.30 (1..3) IP20
Dimming: PHASE - 0-10V

DLM.60 (1..7) IP20
Dimming: PHASE - 0-10V

DLM.100 (1..12) IP20
Dimming: PHASE - 0-10V


TRIMLESS DOWNLIGHTS

ZOE 6

design: Rod&Todd


IP20 **Class 2** **JA8**





Trimless downlight
Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**434 lm**	3500K	**586 lm**
2700K	**553 lm**	4000K	**579 lm**
3000K	**579 lm**	DW	**383 lm**



Code Construction


ZE6 X X X

- **N** 15° · **S** 24° · **M** 36° · **W** 60°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** White · **5** Black · **C** Custom

Accessories

AT064R01055
Airtight recessed housing for insulated ceiling


IC064R01055
Recessed housing for insulated ceiling



MP-R055
Baseplate




RO1055
T-bar baseplate



ZQH001 White
Plasterboard recessing frame



ZQH001.BMK-WH White
ZQH001.BMK-BLK Black
ZQH001.BMK-CU Custom
Backmount frame for hard surfaces



LH03
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPR010A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

ZOE 10

design: Rod&Todd


IP20 **Class 2** **JA8**





Trimless downlight
Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
Tunable White: 9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**770 lm**	4000K	**1178 lm**
2700K	**1125 lm**	DW	**667 lm**
3000K	**1180 lm**	TW	**875 lm**
3500K	**1195 lm**		

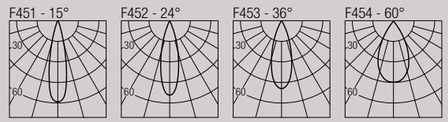

Code Construction


ZE1 X X 9 X

- **N** 15° · **S** 24° · **M** 36° · **W** 60°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm · **TW** Tunable White
- **1** White · **5** Black · **C** Custom

Accessories

AT086R02075
Airtight recessed housing for insulated ceiling


IC086R02075
Recessed housing for insulated ceiling




MP-R075
Baseplate




R02075
T-bar baseplate



ZQC003 White
Plasterboard recessing frame



ZQC003.BMK-WH White
ZQC003.BMK-BLK Black
ZQC003.BMK-CU Custom
Backmount frame for hard surfaces



LH04
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers

DL0561S1 (1..3) IP20
Dimming: 0-10V


BACK

ZOE 20

design: Rod&Todd

IP20 **Class 2**






Trimless downlight

18W · 500mA (V_f 36V)
CRI98 · 2-Step MacAdam

2700K	**2165 lm**
3000K	**2279 lm**
3500K	**2498 lm**
4000K	**2423 lm**



Code Construction


ZE2 X X X

- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **N** 15° · **S** 24° · **M** 36° · **W** 60°
- **1** White · **5** Black · **C** Custom

Accessories

AT086R02075
Airtight recessed housing for insulated ceiling


IC086R02075
Recessed housing for insulated ceiling



MP-R075
Baseplate




R02075
T-bar baseplate



ZQSU002 White
Plasterboard recessing frame



ZQSU002.BMK-WH White
ZQSU002.BMK-BLK Black
ZQSU002.BMK-CU Custom
Backmount frame for hard surfaces



LH06
Low luminance hex louvre

500mA Drivers

CCPRO40A-500 (1) IP20
Dimming: PHASE - 0-10V




TRIMLESS DOWNLIGHTS

MOON Q10

design: Lapo Grassellini

IP20 Class 2 c ETL us **JA8**






Trimless downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
Tunable White: 9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**728 lm**	4000K	**1114 lm**
2700K	**1064 lm**	DW	**630 lm**
3000K	**1116 lm**	TW	**828 lm**
3500K	**1130 lm**		



Code Construction


MQ1 X X 9 X

		S	**M**	**W**		
		36°	46°	60°		
24	**27**	**30**	**35**	**40**	**DW**	**TW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White
1		**5**		**C**		
White		Black		Custom		

Accessories

AT086Q02058
Airtight recessed housing for insulated ceiling


IC086Q02058
Recessed housing for insulated ceiling




MP-Q058
Baseplate




Q02058
T-bar baseplate



MQC002 White
Plasterboard recessing frame



MQC002.BMK-WH White
MQC002.BMK-BLK Black
MQC002.BMK-CU Custom
Backmount frame for hard surfaces



L0H2 (White) - **L0H2B** (Black)
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers


DL0561S1 (1..3) IP20
Dimming: 0-10V



MOON QX120

design: Lapo Grassellini


IP20 Class 2 c ETL us **JA8**



Trimless downlight

Static White: 2x9W · 500mA (V_f 2x18V) · Series wiring
Dim to Warm: 2x7,2W · 400mA (V_f 2x18V) · Series wiring
Tunable White: 2x9W · 500mA (V_f 2x18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**1456 lm**	4000K	**2228 lm**
2700K	**2128 lm**	DW	**1260 lm**
3000K	**2232 lm**	TW	**1656 lm**
3500K	**2260 lm**		



Code Construction


MQX12 X X 9 X

		S	**M**	**W**		
		36°	46°	60°		
24	**27**	**30**	**35**	**40**	**DW**	**TW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White
1		**5**		**C**		
White		Black		Custom		

Accessories

AT086X02108
Airtight recessed housing for insulated ceiling


IC086X02108
Recessed housing for insulated ceiling




MP-X108
Baseplate




X02108
T-bar baseplate



MQX12Q White
Plasterboard recessing frame



MQX12Q.BMK-WH White
MQX12Q.BMK-BLK Black
MQX12Q.BMK-CU Custom
Backmount frame for hard surfaces



2xL0H2 (White) - **2xL0H2B** (Black)
Low luminance hex louvre

Static White - 500mA Drivers

(2x) CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

(2x) CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers

DL0561S1 (1) IP20
Dimming: 0-10V



FLEXALIGHTING


BACK

MOON QX130

design: Lapo Grassellini

IP20 **Class 2** **JA8**






Trimless downlight

Static White: 3x9W · 500mA (V_f 3x18V) · Series wiring
Dim to Warm: 3x7,2W · 400mA (V_f 3x18V) · Series wiring
Tunable White: 3x9W · 500mA (V_f 3x18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**2184 lm**	4000K	**3342 lm**
2700K	**3192 lm**	DW	**1890 lm**
3000K	**3348 lm**	TW	**2484 lm**
3500K	**3393 lm**		



Code Construction


MQX13 X X 9 X

		S	**M**	**W**			
		36°	46°	60°			
24	**27**	**30**	**35**	**40**	**DW**	**TW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White	
1		**5**		**C**			
White		Black		Custom			

Accessories

AT127X03161
Airtight recessed housing for insulated ceiling


IC127X03161
Recessed housing for insulated ceiling




MP-X161
Baseplate




X03161
T-bar baseplate



MQX13Q White
Plasterboard recessing frame



MQX13Q.BMK-WH White
MQX13Q.BMK-BLK Black
MQX13Q.BMK-CU Custom
Backmount frame for hard surfaces



3xL0H2 (White) - **3xL0H2B** (Black)
Low luminance hex louvre

Static White - 500mA Drivers

(3x) CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

(3x) CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers


DL0561S1 (1) IP20
Dimming: 0-10V

SEXUS 10

design: Rod&Todd

IP20 **Class 2** **JA8**






Trimless & adjustable downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
Tunable White: 9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**770 lm**	4000K	**1178 lm**
2700K	**1125 lm**	DW	**667 lm**
3000K	**1180 lm**	TW	**875 lm**
3500K	**1195 lm**		

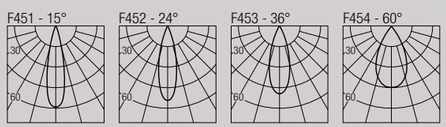

Code Construction


SX1 X X 9 X

		N	**S**	**M**	**W**		
		15°	24°	36°	60°		
24	**27**	**30**	**35**	**40**	**DW**	**TW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White	
1		**5**		**C**			
White		Black		Custom			

Accessories

AT064R01070
Airtight recessed housing for insulated ceiling


IC064R01070
Recessed housing for insulated ceiling




MP-R070
Baseplate




R01070
T-bar baseplate



ZQS002 White
Plasterboard recessing frame



ZQS002.BMK-WH White
ZQS002.BMK-BLK Black
ZQS002.BMK-CU Custom
Backmount frame for hard surfaces



LH04
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers


DL0561S1 (1..3) IP20
Dimming: 0-10V

SEXUS 6

design: Rod&Todd

IP20 **Class 2** **JA8**






Trimless & adjustable downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**434 lm**	3500K	**586 lm**
2700K	**553 lm**	4000K	**579 lm**
3000K	**579 lm**	DW	**383 lm**



Code Construction


SX6 X X X

	N	**S**	**M**	**W**		
	15°	24°	36°	60°		
24	**27**	**30**	**35**	**40**	**DW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	
1		**5**		**C**		
White		Black		Custom		

Accessories

AT064R01060
Airtight recessed housing for insulated ceiling


IC064R01060
Recessed housing for insulated ceiling



MP-R060
Baseplate




R01060
T-bar baseplate



ZQS001 White
Plasterboard recessing frame



ZQS001.BMK-WH White
ZQS001.BMK-BLK Black
ZQS001.BMK-CU Custom
Backmount frame for hard surfaces



LH03
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPR010A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

SEXUS 6 UGR

design: Rod&Todd

IP20 **Class 2** **JA8**






Trimless & adjustable downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**434 lm**	3500K	**586 lm**
2700K	**553 lm**	4000K	**579 lm**
3000K	**579 lm**	DW	**383 lm**



Code Construction


SXU6 X X X

	N	**S**	**M**	**W**		
	15°	24°	36°	60°		
24	**27**	**30**	**35**	**40**	**DW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	
1		**5**		**C**		
White		Black		Custom		

Accessories

AT064R01065
Airtight recessed housing for insulated ceiling


IC064R01065
Recessed housing for insulated ceiling



MP-R065
Baseplate



R01065
T-bar baseplate



ZQSU001 White
Plasterboard recessing frame



ZQSU001.BMK-WH White
ZQSU001.BMK-BLK Black
ZQSU001.BMK-CU Custom
Backmount frame for hard surfaces



LH03
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPR010A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V


TRIMLESS DOWNLIGHTS

SEXUS 10 UGR

design: Rod&Todd

IP20 Class 2 **JA8**






Trimless & adjustable downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
Tunable White: 9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**770 lm**	4000K	**1178 lm**
2700K	**1125 lm**	DW	**667 lm**
3000K	**1180 lm**	TW	**875 lm**
3500K	**1195 lm**		



Code Construction


SXU1 X X 9 X

N	**S**	**M**	**W**				
15°	24°	36°	60°				
24	**27**	**30**	**35**	**40**	**DW**	**TW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White	
1		**5**		**C**			
White		Black		Custom			

Accessories

AT064R01075
Airtight recessed housing for insulated ceiling


IC064R01075
Recessed housing for insulated ceiling



MP-R075
Baseplate




R01075
T-bar baseplate



ZQSU002 White
Plasterboard recessing frame



ZQSU002.BMK-WH White
ZQSU002.BMK-BLK Black
ZQSU002.BMK-CU Custom
Backmount frame for hard surfaces



LH04
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers


DL0561S1 (1..3) IP20
Dimming: 0-10V



MILO 10

design: Lapo Grassellini


IP20 Class 2 **JA8**



Trimless & adjustable downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
Tunable White: 9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**728 lm**	4000K	**1114 lm**
2700K	**1064 lm**	DW	**630 lm**
3000K	**1116 lm**	TW	**828 lm**
3500K	**1130 lm**		



Code Construction


ML1 X X 9 X

S	**M**	**W**				
36°	46°	60°				
24	**27**	**30**	**35**	**40**	**DW**	**TW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White
1		**5**		**C**		
White		Black		Custom		

Accessories

AT064Q01077
Airtight recessed housing for insulated ceiling


IC064Q01077
Recessed housing for insulated ceiling




MP-Q077
Baseplate




Q01077
T-bar baseplate



MLX11Q White
Plasterboard recessing frame



MLX11Q.BMK-WH White
MLX11Q.BMK-BLK Black
MLX11Q.BMK-CU Custom
Backmount frame for hard surfaces



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers

DL0561S1 (1..3) IP20
Dimming: 0-10V


TRIMLESS DOWNLIGHTS

MILO X120

design: Lapo Grassellini

IP20 Class 2 **JA8**






Trimless & adjustable downlight

Static White: 2x9W · 500mA (V_f 2x18V) · Series wiring
Dim to Warm: 2x7,2W · 400mA (V_f 2x18V) · Series wiring
Tunable White: 2x9W · 500mA (V_f 2x18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**1456 lm**
2700K	**2128 lm**
3000K	**2232 lm**
3500K	**2260 lm**

4000K	**2228 lm**
DW	**1260 lm**
TW	**1656 lm**



Code Construction


MLX12 X X 9 X

- **S** 36° · **M** 46° · **W** 60°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm · **TW** Tunable White
- **1** White · **5** Black · **C** Custom

Accessories

AT086X02144
Airtight recessed housing for insulated ceiling


IC086X02144
Recessed housing for insulated ceiling




MP-X144
Baseplate




X02144
T-bar baseplate



MLX12Q White
Plasterboard recessing frame



MLX12Q.BMK-WH White
MLX12Q.BMK-BLK Black
MLX12Q.BMK-CU Custom
Backmount frame for hard surfaces



2xLH01
Low luminance hex louvre

Static White - 500mA Drivers

(2x) CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

(2x) CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers


DL0561S1 (1) IP20
Dimming: 0-10V

MILO X130

design: Lapo Grassellini

IP20 Class 2 **JA8**



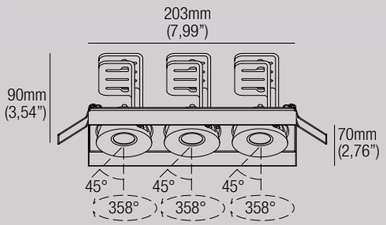


Trimless & adjustable downlight

Static White: 3x9W · 500mA (V_f 3x18V) · Series wiring
Dim to Warm: 3x7,2W · 400mA (V_f 3x18V) · Series wiring
Tunable White: 3x9W · 500mA (V_f 3x18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**2184 lm**
2700K	**3192 lm**
3000K	**3348 lm**
3500K	**3393 lm**

4000K	**3342 lm**
DW	**1890 lm**
TW	**2484 lm**



Code Construction


MLX13 X X 9 X

- **S** 36° · **M** 46° · **W** 60°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm · **TW** Tunable White
- **1** White · **5** Black · **C** Custom

Accessories

AT127X03211
Airtight recessed housing for insulated ceiling


IC127X03211
Recessed housing for insulated ceiling




MP-X211
Baseplate




X03211
T-bar baseplate



MLX13Q White
Plasterboard recessing frame



MLX13Q.BMK-WH White
MLX13Q.BMK-BLK Black
MLX13Q.BMK-CU Custom
Backmount frame for hard surfaces



3xLH01
Low luminance hex louvre

Static White - 500mA Drivers

(3x) CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

(3x) CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers

DL0561S1 (1) IP20
Dimming: 0-10V




ADJUSTABLE DOWNLIGHTS

ANDREW

design: Andrea Chiaramonti

25 mm 0,98" **IP20** **Class 2**






Adjustable downlight

0,75W · 250mA (V_f 2,9V) · Series wiring
CRI90 · 3-Step MacAdam

	250mA
2700K	**81 lm**
3000K	**81 lm**
3500K	**100 lm**
4000K	**107 lm**




Code Construction

AJ X X X X

- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **1** 20° · **2** 40°
- **1** White · **5** Black · **C** Custom
- **1** Round · **2** Square

Accessories

AT064R01025
Airtight recessed housing for insulated ceiling




IC064R01025
Recessed housing for insulated ceiling

MP-R025
Baseplate



R01025
T-bar baseplate



250mA Drivers

CCPR010A-250 (1..12) IP20
Dimming: PHASE - 0-10V


CCPR040A-250 (1..18) IP20
Dimming: PHASE - 0-10V

DAHLIA

design: Roberto Mantovani

40 mm 1,57" **IP20** **Class 2**






Adjustable downlight

1,5W · 500mA (V_f 2,9V) · Series wiring
CRI90 · 3-Step MacAdam

	500mA
2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**




Code Construction

SJ X X X X

- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **0** 10° · **1** 25° · **2** 60°
- **1** White · **5** Black · **C** Custom
- **1** Round · **2** Square

Accessories

AT064R01040
Airtight recessed housing for insulated ceiling




IC064R01040
Recessed housing for insulated ceiling

MP-R040
Baseplate



R01040
T-bar baseplate



500mA Drivers

CCPR010A-500 (1..6) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..18) IP20
Dimming: PHASE - 0-10V




ADJUSTABLE DOWNLIGHTS

ADAN

design: Roberto Mantovani

40 mm 1,57" **IP20** **Class 2** **JA8**






Adjustable downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring

Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**406 lm**
2700K	**517 lm**
3000K	**541 lm**
3500K	**548 lm**
4000K	**541 lm**
DW	**358 lm**



Code Construction

PJE X X X X

24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm

1	**2**	**D**
25°	45°	20x55° (Elliptical)


1	**5**	**C**
White	Black	Custom

1	**2**
Round	Square

Accessories

AT064R01040
Airtight recessed housing for insulated ceiling


IC064R01040
Recessed housing for insulated ceiling



MP-R040
Baseplate



R01040
T-bar baseplate



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

JOEL 2

design: Roberto Mantovani

40 mm 1,57" **IP20** **Class 2**






Adjustable downlight

1,5W · 500mA (V_f 2,9V) · Series wiring

CRI90 · 3-Step MacAdam

	500mA
2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**



Code Construction

JL2 X X X X

27	**30**	**35**	**40**	
2700K	3000K	3500K	4000K	

0	**1**	**2**
10°	25°	60°


1	**5**	**C**
White	Black	Custom

1	**2**
Round	Square

Accessories

AT064R01040
Airtight recessed housing for insulated ceiling


IC064R01040
Recessed housing for insulated ceiling



MP-R040
Baseplate



R01040
T-bar baseplate



500mA Drivers

CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V


ADJUSTABLE DOWNLIGHTS

JOEL 6

design: Roberto Mantovani


40 mm 1,57" **IP20** **Class 2** **JA8**





Adjustable downlight
Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction


JL6E X X X X

- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** 25° · **2** 45° · **D** 20x55° (Elliptical)
- **1** White · **5** Black · **C** Custom
- **1** Round · **2** Square

Accessories

AT064RO1040
Airtight recessed housing for insulated ceiling


IC064RO1040
Recessed housing for insulated ceiling



MP-RO40
Baseplate



RO1040
T-bar baseplate



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

PLEXUS 6

design: Rod&Todd


50 mm 1,97" **IP20** **Class 2** **JA8**





Adjustable downlight
Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**434 lm**	3500K	**586 lm**
2700K	**553 lm**	4000K	**579 lm**
3000K	**579 lm**	DW	**383 lm**



Code Construction


PLX6 X X X X

- **N** 15° · **S** 24° · **M** 36° · **W** 60°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** White · **5** Black · **C** Custom
- **1** Round · **2** Square

Accessories

AT064RO1051
Airtight recessed housing for insulated ceiling


IC064RO1051
Recessed housing for insulated ceiling



MP-R051
Baseplate



RO1051
T-bar baseplate



LH03
Low luminance hex louvre

Static White - 500mA Drivers


CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

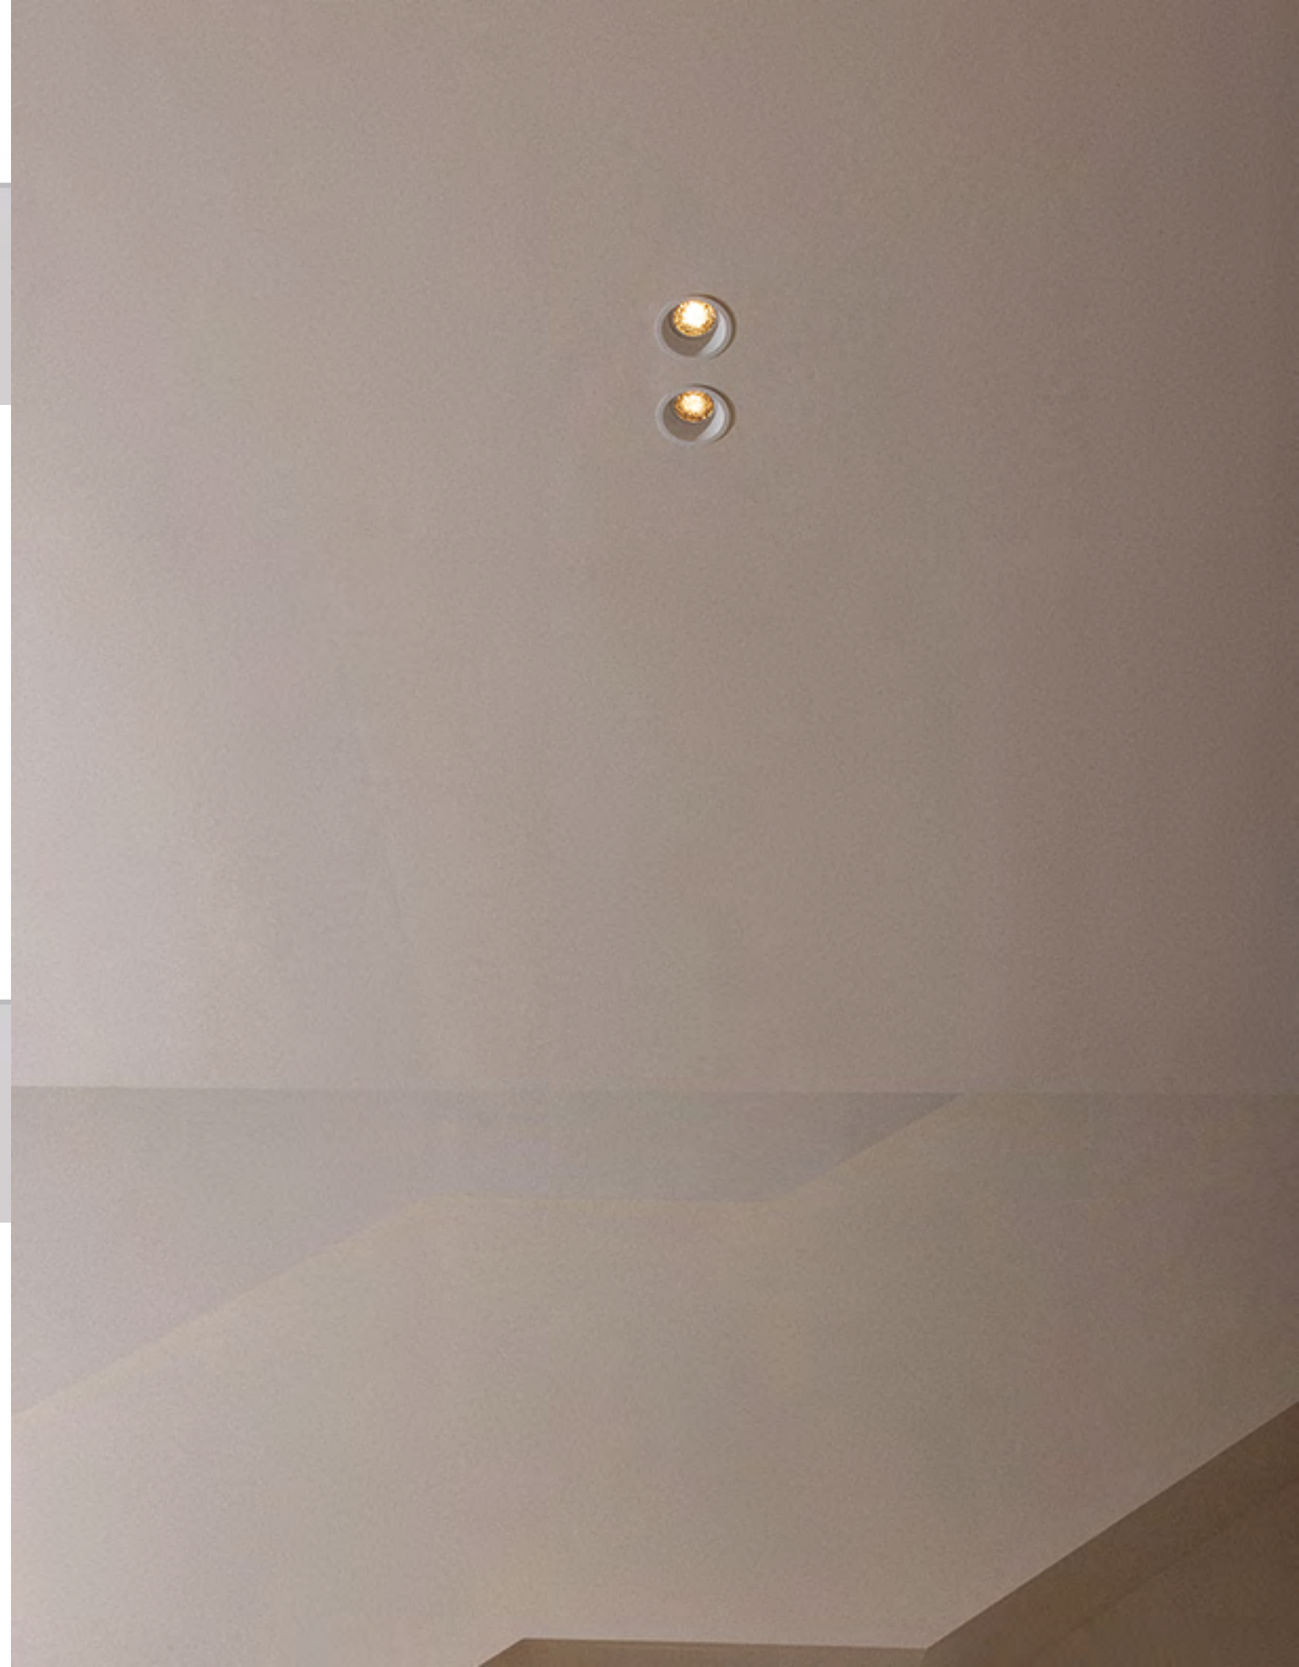


PLEXUS 10

design: Rod&Todd

60 mm / 2,36" IP20 Class 2 JA8






Adjustable downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
Tunable White: 9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**770 lm**	4000K	**1178 lm**
2700K	**1125 lm**	DW	**667 lm**
3000K	**1180 lm**	TW	**875 lm**
3500K	**1195 lm**		

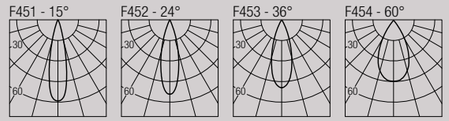

Code Construction


PLX1 X X X

N	**S**	**M**	**W**				
15°	24°	36°	60°				
24	**27**	**30**	**35**	**40**	**DW**	**TW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White	
1	**5**	**C**					
White	Black	Custom					
1	**2**						
Round	Square						

Accessories

AT064R01060
Airtight recessed housing for insulated ceiling


IC064R01060
Recessed housing for insulated ceiling



MP-R060
Baseplate



RO1060
T-bar baseplate



LH04
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers


DL0561S1 (1..3) IP20
Dimming: 0-10V

PLEXUS 6 UGR

design: Rod&Todd

55 mm / 2,17" IP20 Class 2 JA8






Adjustable downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**434 lm**	3500K	**586 lm**
2700K	**553 lm**	4000K	**579 lm**
3000K	**579 lm**	DW	**383 lm**



Code Construction


PLXU6 X X X

N	**S**	**M**	**W**		
15°	24°	36°	60°		
24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm
1	**5**	**C**			
White	Black	Custom			

Accessories

AT064R01055
Airtight recessed housing for insulated ceiling

IC064R01055
Recessed housing for insulated ceiling



MP-R055
Baseplate



RO1055
T-bar baseplate



LH03
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V


ADJUSTABLE DOWNLIGHTS

PLEXUS 10 UGR

design: Rod&Todd

65 mm 2,56" **IP20** **Class 2** **JA8**






Adjustable downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
Tunable White: 9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**770 lm**	4000K	**1178 lm**
2700K	**1125 lm**	DW	**667 lm**
3000K	**1180 lm**	TW	**875 lm**
3500K	**1195 lm**		



Code Construction


PLXU1 X X X

N	**S**	**M**	**W**			
15°	24°	36°	60°			
24	**27**	**30**	**35**	**40**	**DW**	**TW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White
1	**5**	**C**				
White	Black	Custom				

Accessories

AT064RO1065
Airtight recessed housing for insulated ceiling


IC064RO1065
Recessed housing for insulated ceiling



MP-R065
Baseplate



RO1065
T-bar baseplate



LH04
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers

DL0561S1 (1..3) IP20
Dimming: 0-10V




MINE 6

design: Lapo Grassellini

50 mm 1,97" **IP20** **Class 2** **JA8**






Adjustable downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction


MN6 X X X E

1	**2**	**D**				
25°	45°	20x55° (Elliptical)				
24	**27**	**30**	**35**	**40**	**DW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	
1	**5**	**C**				
White	Black	Custom				

Accessories

AT064RO1051
Airtight recessed housing for insulated ceiling


IC064RO1051
Recessed housing for insulated ceiling



MP-R051
Baseplate



RO1051
T-bar baseplate



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

FLEXALIGHTING


ADJUSTABLE DOWNLIGHTS

MINE 10

design: Lapo Grassellini

70 mm 2,76" **IP20** **Class 2** **JA8**






Adjustable downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
Tunable White: 9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**728 lm**	4000K	**1114 lm**
2700K	**1064 lm**	DW	**630 lm**
3000K	**1116 lm**	TW	**828 lm**
3500K	**1130 lm**		



Code Construction


MN1 X X 9 X

			S	**M**	**W**	**D**
			36°	46°	60°	20x55° (Elliptical)
24	**27**	**30**	**35**	**40**	**DW**	**TW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White
1		**5**		**C**		
White		Black		Custom		

Accessories

AT064RO1070
Airtight recessed housing for insulated ceiling


IC064RO1070
Recessed housing for insulated ceiling



MP-R070
Baseplate



RO1070
T-bar baseplate



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers


DL0561S1 (1..3) IP20
Dimming: 0-10V

MINE 20

design: Lapo Grassellini

110 mm 4,33" **IP20** **Class 2** **JA8**






Adjustable downlight

18W · 500mA (V_f 36V)
CRI98 · 2-Step MacAdam

2700K	**1659 lm**
3000K	**1752 lm**
3500K	**1873 lm**
4000K	**1925 lm**



Code Construction


MN2 X X 9 X

		S	**M**	**W**
		23°	35°	52°
27	**30**	**35**	**40**	
2700K	3000K	3500K	4000K	
1	**5**		**C**	
White	Black		Custom	

Accessories

AT086RO2110
Airtight recessed housing for insulated ceiling


IC086RO2110
Recessed housing for insulated ceiling



MP-R110
Baseplate



RO2110
T-bar baseplate



500mA Drivers

CCPRO40A-500 (1) IP20
Dimming: PHASE - 0-10V



FLEXALIGHTING


BACK

MINE 30

design: Lapo Grassellini

110 mm / 4,33" IP20 Class 2 JA8






Adjustable downlight

27W · 700mA (V_f 36V)
CRI98 · 2-Step MacAdam

2700K	**2380 lm**
3000K	**2560 lm**
3500K	**2645 lm**
4000K	**2730 lm**



Code Construction


MN3 X X 9 X

- **S** 23° · **M** 35° · **W** 52°
- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **1** White · **5** Black · **C** Custom


Accessories

AT086RO2110
Airtight recessed housing for insulated ceiling


IC086RO2110
Recessed housing for insulated ceiling



MP-R110
Baseplate



RO2110
T-bar baseplate



700mA Drivers

CCPRO40A-700 (1) IP20
Dimming: PHASE - 0-10V




LOLLO 10

design: Lapo Grassellini

70x70 mm / 2,76x2,76" IP20 Class 2 JA8






Adjustable downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
Tunable White: 9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**728 lm**	4000K	**1114 lm**
2700K	**1064 lm**	DW	**630 lm**
3000K	**1116 lm**	TW	**828 lm**
3500K	**1130 lm**		



Code Construction


LL1 X X 9 X

- **S** 36° · **M** 46° · **W** 60° · **D** 20x55° (Elliptical)
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm · **TW** Tunable White
- **1** White · **5** Black · **C** Custom

Accessories

AT064Q01070
Airtight recessed housing for insulated ceiling


IC064Q01070
Recessed housing for insulated ceiling



MP-Q070
Baseplate



Q01070
T-bar baseplate



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers

DL0561S1 (1..3) IP20
Dimming: 0-10V




ADJUSTABLE DOWNLIGHTS

LOLLO X120

design: Lapo Grassellini

135x70 mm
5,31x2,76"
IP20 Class 2 JA8






Adjustable downlight

Static White: 2x9W · 500mA (V_f 2x18V) · Series wiring
Dim to Warm: 2x7,2W · 400mA (V_f 2x18V) · Series wiring
Tunable White: 2x9W · 500mA (V_f 2x18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	1456 lm	4000K	2228 lm
2700K	2128 lm	DW	1260 lm
3000K	2232 lm	TW	1656 lm
3500K	2260 lm		

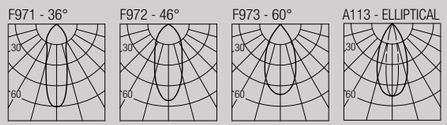

Code Construction


LLX12 X X 9 X

S	**M**	**W**	**D**			
36°	46°	60°	20x55° (Elliptical)			
24	**27**	**30**	**35**	**40**	**DW**	**TW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White
1	**5**	**C**				
White	Black	Custom				

Accessories

AT086X02135
Airtight recessed housing for insulated ceiling


IC086X02135
Recessed housing for insulated ceiling



MP-X135
Baseplate



X02135
T-bar baseplate



2xLH01
Low luminance hex louvre

Static White - 500mA Drivers

(2x) CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

(2x) CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers


DL0561S1 (1) IP20
Dimming: 0-10V

LOLLO X130

design: Lapo Grassellini

200x70 mm
7,87x2,76"
IP20 Class 2 JA8




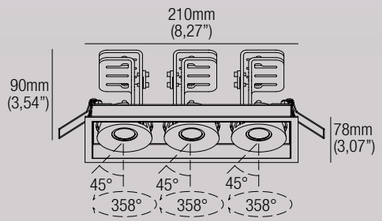

Adjustable downlight

Static White: 3x9W · 500mA (V_f 3x18V) · Series wiring
Dim to Warm: 3x7,2W · 400mA (V_f 3x18V) · Series wiring
Tunable White: 3x9W · 500mA (V_f 3x18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	2184 lm	4000K	3342 lm
2700K	3192 lm	DW	1890 lm
3000K	3348 lm	TW	2484 lm
3500K	3393 lm		



Code Construction


LLX13 X X 9 X

S	**M**	**W**	**D**			
36°	46°	60°	20x55° (Elliptical)			
24	**27**	**30**	**35**	**40**	**DW**	**TW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White
1	**5**	**C**				
White	Black	Custom				

Accessories

AT127X03200
Airtight recessed housing for insulated ceiling


IC127X03200
Recessed housing for insulated ceiling



MP-X200
Baseplate



X03200
T-bar baseplate



3xLH01
Low luminance hex louvre

Static White - 500mA Drivers

(3x) CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

(3x) CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers

DL0561S1 (1) IP20
Dimming: 0-10V




ADJUSTABLE DOWNLIGHTS

LOLLO 20




design: Lapo Grassellini

115x115 mm
4,53x4,53"
IP20 Class 2 JA8





Adjustable downlight
18W · 500mA (V_f 36V)
CRI98 · 2-Step MacAdam

		F901 - 23°	F902 - 35°	F903 - 52°
2700K	**1659 lm**			
3000K	**1752 lm**			
3500K	**1873 lm**			
4000K	**1925 lm**			

Code Construction


LL2 X X 9 X

- **S** 23° · **M** 35° · **W** 52°
- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **1** White · **5** Black · **C** Custom

Accessories

AT086Q02115
Airtight recessed housing for insulated ceiling


IC086Q02115
Recessed housing for insulated ceiling



MP-Q115
Baseplate



Q02115
T-bar baseplate



500mA Drivers


CCPR040A-500 (1) IP20
Dimming: PHASE - 0-10V

LOLLO X220




design: Lapo Grassellini

115x230 mm
4,53x9,06"
IP20 Class 2





Adjustable downlight
2x18W · 500mA (V_f 2x36V)
CRI98 · 2-Step MacAdam

		F901 - 23°	F902 - 35°	F903 - 52°
2700K	**3318 lm**			
3000K	**3504 lm**			
3500K	**3746 lm**			
4000K	**3850 lm**			

Code Construction


LLX22 X X 9 X

- **S** 23° · **M** 35° · **W** 52°
- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **1** White · **5** Black · **C** Custom

Accessories

AT127X03230
Airtight recessed housing for insulated ceiling


IC127X03230
Recessed housing for insulated ceiling



MP-X230
Baseplate



X03230
T-bar baseplate



500mA Drivers

2xCCPR040A-500 (1) IP20
Dimming: PHASE - 0-10V


ADJUSTABLE DOWNLIGHTS

LOLLO X230

design: Lapo Grassellini

115x340 mm
4,53x13,39"
IP20 Class 2




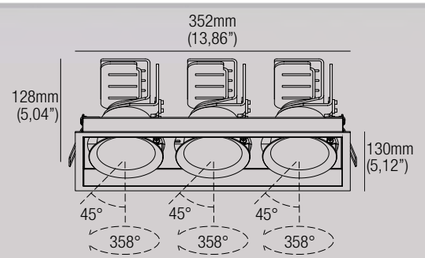

Adjustable downlight

3x18W · 500mA (V_f 3x36V)
CRI98 · 2-Step MacAdam

2700K	**4977 lm**
3000K	**5256 lm**
3500K	**5618 lm**
4000K	**5775 lm**



Code Construction


LLX23 X X 9 X

S	**M**	**W**	
23°	35°	52°	
27	**30**	**35**	**40**
2700K	3000K	3500K	4000K
1	**5**	**C**	
White	Black	Custom	

Accessories

AT181X04340
Airtight recessed housing for insulated ceiling


IC181X04340
Recessed housing for insulated ceiling



MP-X340
Baseplate



X04340
T-bar baseplate



500mA Drivers

3xCCPRO40A-500 (1) IP20
Dimming: PHASE - 0-10V




LOLLO 30

design: Lapo Grassellini

115x115 mm
4,53x4,53"
IP20 Class 2






Adjustable downlight

27W · 700mA (V_f 36V)
CRI98 · 2-Step MacAdam

2700K	**2380 lm**
3000K	**2560 lm**
3500K	**2645 lm**
4000K	**2730 lm**



Code Construction


LL3 X X 9 X

S	**M**	**W**	
23°	35°	52°	
27	**30**	**35**	**40**
2700K	3000K	3500K	4000K
1	**5**	**C**	
White	Black	Custom	

Accessories

AT086Q02115
Airtight recessed housing for insulated ceiling


IC086Q02115
Recessed housing for insulated ceiling



MP-Q115
Baseplate



Q02115
T-bar baseplate



700mA Drivers

CCPR040A-700 (1) IP20
Dimming: PHASE - 0-10V




ADJUSTABLE DOWNLIGHTS

LOLLO X320

design: Lapo Grassellini

115x230 mm
4,53x9,06"
IP20 Class 2






Adjustable downlight

2x27W · 700mA (V_f 2x36V)
CRI93 · 2-Step MacAdam

2700K	**4760 lm**
3000K	**5120 lm**
3500K	**5290 lm**
4000K	**5460 lm**




Code Construction

LLX32 X X 9 X

S	**M**	**W**	
23°	35°	52°	
27	**30**	**35**	**40**
2700K	3000K	3500K	4000K
1	**5**	**C**	
White	Black	Custom	

Accessories

AT127X03230
Airtight recessed housing for insulated ceiling




IC127X03230
Recessed housing for insulated ceiling

MP-X230
Baseplate



X03230
T-bar baseplate



700mA Drivers


(2x) CCPR040A-700 (1) IP20
Dimming: PHASE - 0-10V

MINILEDA R10

design: Lapo Grassellini

55 mm
2,17"
IP20 Class 2






Adjustable downlight

3W · 350mA (V_f 8,7V) · Series wiring
CRI90 · 3-Step MacAdam

2700K	**267 lm**
3000K	**279 lm**
3500K	**292 lm**
4000K	**309 lm**




Code Construction

MLDR X X X

1	**2**		
18°	40°		
27	**30**	**35**	**40**
2700K	3000K	3500K	4000K
1	**5**	**C**	
White	Black	Custom	


Accessories

AT086R02055
Airtight recessed housing for insulated ceiling




IC086R02055
Recessed housing for insulated ceiling

MP-R055
Baseplate



R02055
T-bar baseplate



350mA Drivers

CCPR010A-350 (1..3) IP20
Dimming: PHASE - 0-10V


CCPR040A-350 (1..6) IP20
Dimming: PHASE - 0-10V

LOLLO X330

design: Lapo Grassellini

115x340 mm
4,53x13,39"
IP20 Class 2




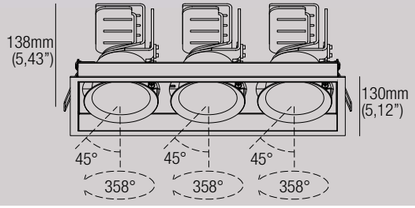

Adjustable downlight

3x27W · 700mA (V_f 3x36V)
CRI93 · 2-Step MacAdam

2700K	**7140 lm**
3000K	**7680 lm**
3500K	**7935 lm**
4000K	**8190 lm**




Code Construction

LLX33 X X 9 X

S	**M**	**W**	
23°	35°	52°	
27	**30**	**35**	**40**
2700K	3000K	3500K	4000K
1	**5**	**C**	
White	Black	Custom	

Accessories

AT181X04340
Airtight recessed housing for insulated ceiling




IC181X04340
Recessed housing for insulated ceiling

MP-X340
Baseplate



X04340
T-bar baseplate



700mA Drivers


(3x) CCPR040A-700 (1) IP20
Dimming: PHASE - 0-10V

MINILEDA Q10

design: Lapo Grassellini

58x58 mm
2,28x2,28"
IP20 Class 2






Adjustable downlight

3W · 350mA (V_f 8,7V) · Series wiring
CRI90 · 3-Step MacAdam

2700K	**267 lm**
3000K	**279 lm**
3500K	**292 lm**
4000K	**309 lm**




Code Construction

MLDQ X X X

1	**2**		
18°	40°		
27	**30**	**35**	**40**
2700K	3000K	3500K	4000K
1	**5**	**C**	
White	Black	Custom	


Accessories

AT086Q02058
Airtight recessed housing for insulated ceiling




IC086Q02058
Recessed housing for insulated ceiling

MP-Q058
Baseplate



Q01058
T-bar baseplate



350mA Drivers

CCPR010A-350 (1..3) IP20
Dimming: PHASE - 0-10V

CCPR040A-350 (1..6) IP20
Dimming: PHASE - 0-10V


BACK

MINILEDA QX120

design: Lapo Grassellini

105x58 mm
4,13x2,28"
IP20 Class 2






Adjustable downlight

2x3W · 350mA (V_f 2x8,7V) · Series wiring
CRI90 · 3-Step MacAdam

	F005 - 18°	F006 - 40°
2700K	**534 lm**	
3000K	**558 lm**	
3500K	**584 lm**	
4000K	**618 lm**	



Code Construction


MLDQX12 X X X

- 1 — 18°
- 2 — 40°
- **27** — 2700K
- **30** — 3000K
- **35** — 3500K
- **40** — 4000K
- **1** — White
- **5** — Black
- **C** — Custom

Accessories

AT086X02105
Airtight recessed housing for insulated ceiling


IC086X02105
Recessed housing for insulated ceiling



MP-X105
Baseplate



X02105
T-bar baseplate



350mA Drivers

CCPRO10A-350 (1) IP20
Dimming: PHASE - 0-10V


CCPRO40A-350 (1..3) IP20
Dimming: PHASE - 0-10V

MINILEDA QX130

design: Lapo Grassellini

154x58 mm
6,06x2,28"
IP20 Class 2





Adjustable downlight

3x3W · 350mA (V_f 3x8,7V) · Series wiring
CRI90 · 3-Step MacAdam

	F005 - 18°	F006 - 40°
2700K	**801 lm**	
3000K	**837 lm**	
3500K	**876 lm**	
4000K	**927 lm**	





Code Construction


MLDQX13 X X X

- 1 — 18°
- 2 — 40°
- **27** — 2700K
- **30** — 3000K
- **35** — 3500K
- **40** — 4000K
- **1** — White
- **5** — Black
- **C** — Custom

Accessories

AT086X02154
Airtight recessed housing for insulated ceiling


IC086X02154
Recessed housing for insulated ceiling



MP-X154
Baseplate



X02154
T-bar baseplate



350mA Drivers

CCPRO10A-350 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-350 (1..2) IP20
Dimming: PHASE - 0-10V


ADJUSTABLE DOWNLIGHTS

LEDA R10

design: Lapo Grassellini

95 mm / 3,74" IP20 Class 2




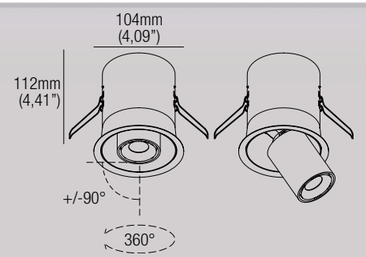

Adjustable downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	728 lm	3500K	1130 lm
2700K	1064 lm	4000K	1114 lm
3000K	1116 lm	DW	630 lm



Code Construction


LDR X X 9 X

- **S** 36° · **M** 46° · **W** 60°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** White · **5** Black · **C** Custom


Accessories

AT086R02095
Airtight recessed housing for insulated ceiling


IC086R02095
Recessed housing for insulated ceiling



MP-R095
Baseplate



R02095
T-bar baseplate



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V


CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

LEDA Q10

design: Lapo Grassellini

95x95 mm / 3,74x3,74" IP20 Class 2




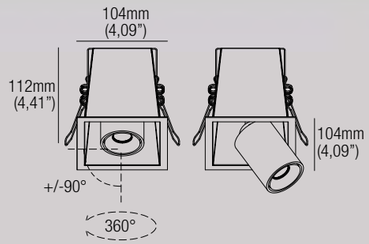

Adjustable downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	728 lm	3500K	1130 lm
2700K	1064 lm	4000K	1114 lm
3000K	1116 lm	DW	630 lm



Code Construction


LDQ X X 9 X

- **S** 36° · **M** 46° · **W** 60°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** White · **5** Black · **C** Custom

Accessories

AT086Q02095
Airtight recessed housing for insulated ceiling


IC086Q02095
Recessed housing for insulated ceiling



MP-Q095
Baseplate



Q02095
T-bar baseplate



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V




ADJUSTABLE DOWNLIGHTS

LEDA QX120

design: Lapo Grassellini

175x95 mm
6,89x3,74"
IP20 Class 2






Adjustable downlight

Static White: 2x9W · 500mA (V_f 2x18V) · Series wiring
Dim to Warm: 2x7,2W · 400mA (V_f 2x18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	1456 lm	3500K	2260 lm
2700K	2128 lm	4000K	2228 lm
3000K	2232 lm	DW	1260 lm



Code Construction


LDQX12 X X 9 X

S	**M**	**W**				
36°	46°	60°				
24	**27**	**30**	**35**	**40**	**DW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	
1	**5**	**C**				
White	Black	Custom				

Accessories

AT127X03175
Airtight recessed housing for insulated ceiling


IC127X03175
Recessed housing for insulated ceiling



MP-X175
Baseplate



X03175
T-bar baseplate



2xLH01
Low luminance hex louvre

Static White - 500mA Drivers

(2x) CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

(2x) CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1) IP20
Dimming: PHASE - 0-10V




LEDA QX130

design: Lapo Grassellini

255x95 mm
10,04x3,74"
IP20 Class 2




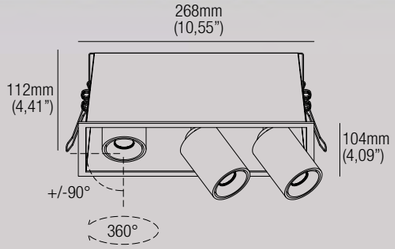

Adjustable downlight

Static White: 3x9W · 500mA (V_f 3x18V) · Series wiring
Dim to Warm: 3x7,2W · 400mA (V_f 3x18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	2184 lm	3500K	3390 lm
2700K	3192 lm	4000K	3342 lm
3000K	3348 lm	DW	1890 lm



Code Construction


LDQX13 X X 9 X

S	**M**	**W**				
36°	46°	60°				
24	**27**	**30**	**35**	**40**	**DW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	
1	**5**	**C**				
White	Black	Custom				

Accessories

AT181X04255
Airtight recessed housing for insulated ceiling


IC181X04255
Recessed housing for insulated ceiling



MP-X255
Baseplate



X04255
T-bar baseplate



3xLH01
Low luminance hex louvre

Static White - 500mA Drivers

(3x) CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

(3x) CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1) IP20
Dimming: PHASE - 0-10V




STEPLIGHTS

SOREL

design: Roberto Mantovani

30 mm 1,18" IP65 Class 2



Steplight

1,5W · 500mA (V_f 2,9V) · Series wiring
CRI85 · 3-Step MacAdam

	500mA
2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**





Code Construction

NP1 X 0 X


	27	**30**	**35**	**40**
	2700K	3000K	3500K	4000K
B	**N**	**Z**	**C**	
White	Black	INOX AISI 316L	Custom	

Accessories


CS1001
Recessing box



CS1006
Recessing box



CS1006.CPW
Concrete pour housing for wall



500mA Drivers


CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V

UMA

design: Roberto Mantovani

40 mm 1,57" IP20 Class 2



Steplight

1W · 350mA (V_f 2,9V) · Series wiring
CRI90 · 3-Step MacAdam

2700K	**81 lm**
3000K	**81 lm**
3500K	**100 lm**
4000K	**107 lm**






Code Construction

UM X X 2 X

	27	**30**	**35**	**40**
	2700K	3000K	3500K	4000K
1	**5**	**C**		
White	Black	Custom		
1	**2**			
Round	Square			

Accessories - Accessori

CS1005
Recessing box



350mA Drivers

CCPRO10A-350 (1..9) IP20
Dimming: PHASE - 0-10V

CCPRO40A-350 (1..18) IP20
Dimming: PHASE - 0-10V

FLEXALIGHTING


STEPLIGHTS

BIRDIE

design: Jude Allen


35 mm 1,38" **IP20** **Class 2**

Steplight
1W · 350mA (V_f 2,9V) · Series wiring
CRI98 · 2-Step MacAdam



2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**





Code Construction

BDE X X

	27	**30**	**35**	**40**
	2700K	3000K	3500K	4000K
1	**5**	**C**		
White	Black	Custom		

350mA Drivers

CCPRO10A-350 (1..9) IP20
Dimming: PHASE - 0-10V


CCPRO40A-350 (1..18) IP20
Dimming: PHASE - 0-10V

BIRDIE TRIMLESS

design: Jude Allen

IP20 **Class 2**

Trimless steplight
1W · 350mA (V_f 2,9V) · Series wiring
CRI98 · 2-Step MacAdam



2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**






Code Construction

BDT X X

	27	**30**	**35**	**40**
	2700K	3000K	3500K	4000K
1	**5**	**C**		
White	Black	Custom		

Accessories

ZBD001
Plasterboard recessing frame



350mA Drivers

CCPRO10A-350 (1..9) IP20
Dimming: PHASE - 0-10V


CCPRO40A-350 (1..18) IP20
Dimming: PHASE - 0-10V

STEPLIGHTS

BEAN

design: Roberto Mantovani

30 mm 1,18" **IP67** **Class 2**



Steplight
1W · 350mA (V$_f$ 2,9V) · Series wiring
CRI90 · 3-Step MacAdam

2700K — **128 lm**
3000K — **133 lm**
3500K — **146 lm**
4000K — **154 lm**





Code Construction


EA1 X X

- **B** White
- **N** Black
- **Z** INOX AISI 316L
- **C** Custom


- **27** 2700K
- **30** 3000K
- **35** 3500K
- **40** 4000K

Accessories

CS1006
Recessing box



CS1006.CPW
Concrete pour housing for wall



350mA Drivers


CCPRO10A-350 (1..9) IP20
Dimming: PHASE - 0-10V

CCPRO40A-350 (1..18) IP20
Dimming: PHASE - 0-10V

BANG


design: Roberto Mantovani

30 mm 1,18" **IP20** **Class 2**



Steplight
1,5W · 500mA (V$_f$ 2,9V) · Series wiring
CRI90 · 3-Step MacAdam

2700K — **128 lm**
3000K — **133 lm**
3500K — **146 lm**
4000K — **154 lm**

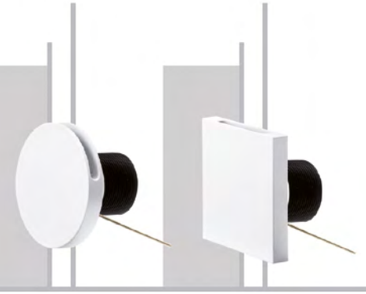

Code Construction

BA X X X X

- **27** 2700K
- **30** 3000K
- **35** 3500K
- **40** 4000K


- **1** White
- **5** Black
- **C** Custom

- **1** Single emission
- **2** Double emission

- **1** Round
- **2** Square

Accessories

CS1006
Recessing box



500mA Drivers

CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V


CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V

STEPLIGHTS

DAGO 2

design: Roberto Mantovani

40x60 mm 1,57x2,36" **IP20** **Class 2**



Steplight

1,5W · 500mA (V_f 2,9V) · Series wiring

CRI90 · 3-Step MacAdam

2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**





Code Construction


DG2 X 2 X

27	**30**	**35**	**40**	
2700K	3000K	3500K	4000K	

1	**5**	**C**
White	Black	Custom

Accessories

CS1007
Recessing box



500mA Drivers


CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V

DAGO 6

design: Roberto Mantovani

40x60 mm 1,57x2,36" **IP20** **Class 2**



Steplight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring

Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**





Code Construction


DG6 X 2 X

24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm

1	**5**	**C**
White	Black	Custom

Accessories

CS1007
Recessing box



Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

BACK

ELIA T6

design: Jude Allen


IP20 Class 2



Trimless projector

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**





Code Construction

ELIT6 X X X


24	27	30	35	40	DW
2400K	2700K	3000K	3500K	4000K	Dim to Warm

1	2
25°	45°

1	5	C
White	Black	Custom

Accessories

AT064R01045
Airtight recessed housing for insulated ceiling




IC064R01045
Recessed housing for insulated ceiling

MP-R045
Baseplate



RO1045
T-bar baseplate



ZQC001 White
Plasterboard recessing frame



ZQC001.BMK-WH White
ZQC001.BMK-BLK Black
ZQC001.BMK-CU Custom
Backmount frame for hard surfaces



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers


CCPR010A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

ELIJAH T6

design: Jude Allen


IP20 Class 2



Trimless projector

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**





Code Construction

ELJT6 X X X


24	27	30	35	40	DW
2400K	2700K	3000K	3500K	4000K	Dim to Warm

1	2
25°	45°

1	5	C
White	Black	Custom

Accessories

AT064R01045
Airtight recessed housing for insulated ceiling




IC064R01045
Recessed housing for insulated ceiling

MP-R045
Baseplate



RO1045
T-bar baseplate



ZQC001 White
Plasterboard recessing frame



ZQC001.BMK-WH White
ZQC001.BMK-BLK Black
ZQC001.BMK-CU Custom
Backmount frame for hard surfaces



Static White - 500mA Drivers

CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers


CCPR010A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

ELIA T10

design: Jude Allen

IP20 Class 2




Trimless projector


Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**744 lm**	3500K	**1156 lm**
2700K	**1088 lm**	4000K	**1139 lm**
3000K	**1142 lm**	DW	**645 lm**











Code Construction

ELIT1 X X X


24	27	30	35	40	DW
2400K	2700K	3000K	3500K	4000K	Dim to Warm

S	M	F	W
15°	30°	45°	60°

1	5	C
White	Black	Custom

Accessories

AT064R01045
Airtight recessed housing for insulated ceiling




IC064R01045
Recessed housing for insulated ceiling

MP-R045
Baseplate



RO1045
T-bar baseplate



ZQC001 White
Plasterboard recessing frame



ZQC001.BMK-WH White
ZQC001.BMK-BLK Black
ZQC001.BMK-CU Custom
Backmount frame for hard surfaces



LH02
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers


CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

ELIJAH T10

design: Jude Allen


IP20 Class 2




Trimless projector


Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**744 lm**	3500K	**1156 lm**
2700K	**1088 lm**	4000K	**1139 lm**
3000K	**1142 lm**	DW	**645 lm**











Code Construction

ELJT1 X X X


24	27	30	35	40	DW
2400K	2700K	3000K	3500K	4000K	Dim to Warm

S	M	F	W
15°	30°	45°	60°

1	5	C
White	Black	Custom

Accessories

AT064R01045
Airtight recessed housing for insulated ceiling




IC064R01045
Recessed housing for insulated ceiling

MP-R045
Baseplate




RO1045
T-bar baseplate



ZQC001 White
Plasterboard recessing frame



ZQC001.BMK-WH White
ZQC001.BMK-BLK Black
ZQC001.BMK-CU Custom
Backmount frame for hard surfaces



Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V


CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

TRIMLESS PROJECTORS

ELO T6

design: Jude Allen


IP20 Class 2



Trimless projector

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**





Code Construction

ELOT6 X X X

24	**27**	**30**	**35**	**40**	**DW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	


1	**2**	**D**	
25°	45°	Wall Washer	

1	**5**	**C**
White	Black	Custom

Accessories

AT064RO1045
Airtight recessed housing for insulated ceiling


IC064RO1045
Recessed housing for insulated ceiling



MP-R045
Baseplate




RO1045
T-bar baseplate



ZQC001 White
Plasterboard recessing frame



ZQC001.BMK-WH White
ZQC001.BMK-BLK Black
ZQC001.BMK-CU Custom
Backmount frame for hard surfaces



Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers


CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

ELO T10

design: Jude Allen


IP20 Class 2





Trimless projector


Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**744 lm**
2700K	**1088 lm**
3000K	**1142 lm**
3500K	**1156 lm**
4000K	**1139 lm**
DW	**645 lm**













Code Construction

ELOT1 X X X

24	**27**	**30**	**35**	**40**	**DW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	


S	**M**	**F**	**W**	**D**	
15°	30°	45°	60°	Wall Washer	

1	**5**	**C**
White	Black	Custom

Accessories

AT064RO1045
Airtight recessed housing for insulated ceiling


IC064RO1045
Recessed housing for insulated ceiling



MP-R045
Baseplate



RO1045
T-bar baseplate



ZQC001 White
Plasterboard recessing frame



ZQC001.BMK-WH White
ZQC001.BMK-BLK Black
ZQC001.BMK-CU Custom
Backmount frame for hard surfaces



LH02
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V




TRIMLESS PROJECTORS

JOS T2

design: Roberto Mantovani

IP20 **Class 2**





Trimless projector

1,5W · 500mA (V_f 2,9V) · Series wiring
CRI90 · 3-Step MacAdam

500mA

2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**



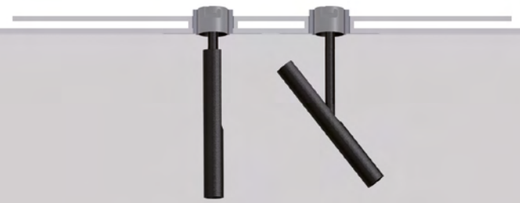


Code Construction

JST2 X X X

27	**30**	**35**	**40**	
2700K	3000K	3500K	4000K	
1	**2**			
20°	40°			
1	**5**	**C**		
White	Black	Custom		

Accessories

AT064R01045
Airtight recessed housing for insulated ceiling




IC064R01045
Recessed housing for insulated ceiling

MP-R045
Baseplate




R01045
T-bar baseplate



ZQC001 White
Plasterboard recessing frame



ZQC001.BMK-WH White
ZQC001.BMK-BLK Black
ZQC001.BMK-CU Custom
Backmount frame for hard surfaces



L001
Low luminance hex louvre

500mA Drivers


CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V

JOS T6

design: Roberto Mantovani

IP20 **Class 2**




Trimless projector

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**








Code Construction

JST6 X X X

24	**27**	**30**	**35**	**40**	**DW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	
1	**2**					
25°	45°					
1	**5**	**C**				
White	Black	Custom				

Accessories

AT064R01045
Airtight recessed housing for insulated ceiling




IC064R01045
Recessed housing for insulated ceiling

MP-R045
Baseplate



R01045
T-bar baseplate



ZQC001 White
Plasterboard recessing frame



ZQC001.BMK-WH White
ZQC001.BMK-BLK Black
ZQC001.BMK-CU Custom
Backmount frame for hard surfaces



LJ02 (White) - **LJ02B** (Black)
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V




FLEXALIGHTING

BACK

JOS T10

design: Roberto Mantovani


IP20 **Class 2**




Trimless projector

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**728 lm**
2700K	**1064 lm**
3000K	**1116 lm**
3500K	**1130 lm**
4000K	**1114 lm**
DW	**630 lm**



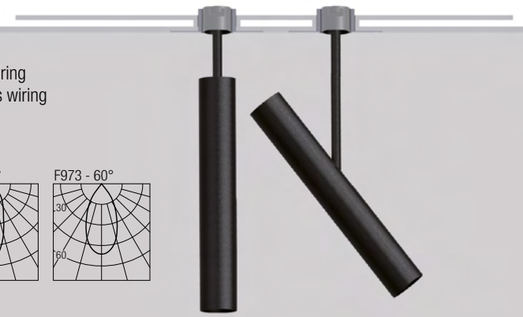

Code Construction


JST1 X X X

S	**M**	**W**				
36°	46°	60°				
24	**27**	**30**	**35**	**40**	**DW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	
1		**5**		**C**		
White		Black		Custom		


Accessories

AT064R01045
Airtight recessed housing for insulated ceiling


IC064R01045
Recessed housing for insulated ceiling




MP-R045
Baseplate



RO1045
T-bar baseplate



ZQC001 White
Plasterboard recessing frame



ZQC001.BMK-WH White
ZQC001.BMK-BLK Black
ZQC001.BMK-CU Custom
Backmount frame for hard surfaces

LJ01 (White) - **LJ01B** (Black)
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers


CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

TEDDY T6

design: Jude Allen


IP20 **Class 2**



Trimless projector

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**434 lm**	3500K	**586 lm**
2700K	**553 lm**	4000K	**579 lm**
3000K	**579 lm**	DW	**383 lm**





Code Construction


TYT6 X X X

24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm
1	**2**	**3**	**4**		
15°	24°	36°	60°		
1		**5**	**C**		
White		Black	Custom		

Accessories

AT064R01045
Airtight recessed housing for insulated ceiling


IC064R01045
Recessed housing for insulated ceiling




MP-R045
Baseplate




RO1045
T-bar baseplate



ZQC001 White
Plasterboard recessing frame



ZQC001.BMK-WH White
ZQC001.BMK-BLK Black
ZQC001.BMK-CU Custom
Backmount frame for hard surfaces



LH03
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPR010A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V


GEL35
Colour corrective poly gel, consult with factory

OPT3515 15°
OPT3524 24°
OPT3536 36°
OPT3560 60°
Field changeable optic

TEDDY T10

design: Jude Allen


IP20 **Class 2**



Trimless projector

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**770 lm**
2700K	**1125 lm**
3000K	**1180 lm**
3500K	**1195 lm**
4000K	**1178 lm**
DW	**667 lm**





Code Construction


TYT1 X X X

24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm
1	**2**	**3**	**4**		
15°	24°	36°	60°		
1		**5**	**C**		
White		Black	Custom		

Accessories

AT064R01045
Airtight recessed housing for insulated ceiling


IC064R01045
Recessed housing for insulated ceiling



MP-R045
Baseplate



RO1045
T-bar baseplate



ZQC001 White
Plasterboard recessing frame



ZQC001.BMK-WH White
ZQC001.BMK-BLK Black
ZQC001.BMK-CU Custom
Backmount frame for hard surfaces

LH04
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V


GEL45
Colour corrective poly gel, consult with factory

OPT4515 15°
OPT4524 24°
OPT4536 36°
OPT4560 60°
Field changeable optic

ELIA R6

design: Jude Allen

40 mm 1,57" IP20 Class 2






Semi-recessed projector

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction

ELIR6 X X X


24	27	30	35	40	DW
2400K	2700K	3000K	3500K	4000K	Dim to Warm

S	M
25°	45°

1	5	C
White	Black	Custom

Accessories

AT064RO1040
Airtight recessed housing for insulated ceiling




IC064RO1040
Recessed housing for insulated ceiling

MP-R040
Baseplate



RO1040
T-bar baseplate



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers


CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

ELIJAH R6

design: Jude Allen

40 mm 1,57" IP20 Class 2




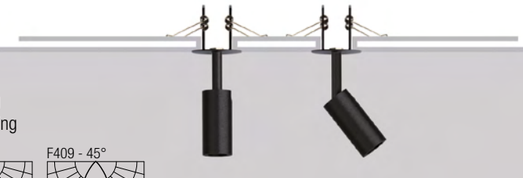

Semi-recessed projector

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction

ELJR6 X X X


24	27	30	35	40	DW
2400K	2700K	3000K	3500K	4000K	Dim to Warm

S	M
25°	45°

1	5	C
White	Black	Custom

Accessories

AT064RO1040
Airtight recessed housing for insulated ceiling




IC064RO1040
Recessed housing for insulated ceiling

MP-R040
Baseplate



RO1040
T-bar baseplate



Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers


CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

ELIA R10

design: Jude Allen

40 mm 1,57" IP20 Class 2




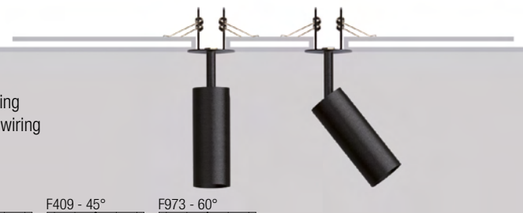

Semi-recessed projector

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**744 lm**
2700K	**1088 lm**
3000K	**1142 lm**
3500K	**1156 lm**
4000K	**1139 lm**
DW	**645 lm**



Code Construction

ELIR1 X X X


24	27	30	35	40	DW
2400K	2700K	3000K	3500K	4000K	Dim to Warm

S	M	F	W
15°	30°	45°	60°

1	5	C
White	Black	Custom

Accessories

AT064RO1040
Airtight recessed housing for insulated ceiling




IC064RO1040
Recessed housing for insulated ceiling

MP-R040
Baseplate



RO1040
T-bar baseplate



LH02
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers


CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V


CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

ELIJAH R10

design: Jude Allen

40 mm 1,57" IP20 Class 2




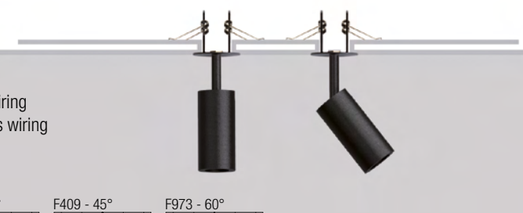

Semi-recessed projector

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**744 lm**
2700K	**1088 lm**
3000K	**1142 lm**
3500K	**1156 lm**
4000K	**1139 lm**
DW	**645 lm**



Code Construction

ELJR1 X X X


24	27	30	35	40	DW
2400K	2700K	3000K	3500K	4000K	Dim to Warm

S	M	F	W
15°	30°	45°	60°

1	5	C
White	Black	Custom

Accessories

AT064RO1040
Airtight recessed housing for insulated ceiling




IC064RO1040
Recessed housing for insulated ceiling

MP-R040
Baseplate



RO1040
T-bar baseplate



Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers


CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

ELO R6

design: Jude Allen

40 mm 1,57" IP20 Class 2






Semi-recessed projector

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction

ELOR6 X X X


24	**27**	**30**	**35**	**40**	**DW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	

S	**M**	**D**
25°	45°	Wall Washer

1	**5**	**C**
White	Black	Custom

Accessories

AT064RO1040
Airtight recessed housing for insulated ceiling




IC064RO1040
Recessed housing for insulated ceiling

MP-R040
Baseplate



RO1040
T-bar baseplate



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers


CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

JOS R2

design: Roberto Mantovani

40 mm 1,57" IP20 Class 2






Semi-recessed projector

1,5W · 500mA (V_f 2,9V) · Series wiring
CRI90 · 3-Step MacAdam

	500mA
2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**



Code Construction

JSR2 X X X


27	**30**	**35**	**40**	
2700K	3000K	3500K	4000K	

1	**2**
20°	40°

1	**5**	**C**
White	Black	Custom

Accessories

AT064RO1040
Airtight recessed housing for insulated ceiling




IC064RO1040
Recessed housing for insulated ceiling

MP-R040
Baseplate



RO1040
T-bar baseplate



L001
Low luminance hex louvre

500mA Drivers


CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V

ELO R10

design: Jude Allen


40 mm 1,57" IP20 Class 2



Semi-recessed projector

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**744 lm**
2700K	**1088 lm**
3000K	**1142 lm**
3500K	**1156 lm**
4000K	**1139 lm**
DW	**645 lm**

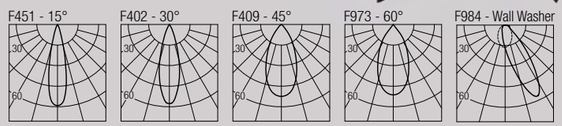

Code Construction

ELOR1 X X X


24	**27**	**30**	**35**	**40**	**DW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	

S	**M**	**F**	**W**	**D**
15°	30°	45°	60°	Wall Washer

1	**5**	**C**
White	Black	Custom

Accessories

AT064RO1040
Airtight recessed housing for insulated ceiling




IC064RO1040
Recessed housing for insulated ceiling

MP-R040
Baseplate



RO1040
T-bar baseplate



LH02
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers


CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

JOS R6

design: Roberto Mantovani

40 mm 1,57" IP20 Class 2






Semi-recessed projector

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction

JSR6 X X X


24	**27**	**30**	**35**	**40**	**DW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	

1	**2**
25°	45°

1	**5**	**C**
White	Black	Custom

Accessories

AT064RO1040
Airtight recessed housing for insulated ceiling




IC064RO1040
Recessed housing for insulated ceiling

MP-R040
Baseplate



RO1040
T-bar baseplate



LJ02 (White) - **LJ02B** (Black)
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers


CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

JOS R10

design: Roberto Mantovani


40 mm 1,57" IP20 Class 2




Semi-recessed projector

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**728 lm**
2700K	**1064 lm**
3000K	**1116 lm**
3500K	**1130 lm**
4000K	**1114 lm**
DW	**630 lm**



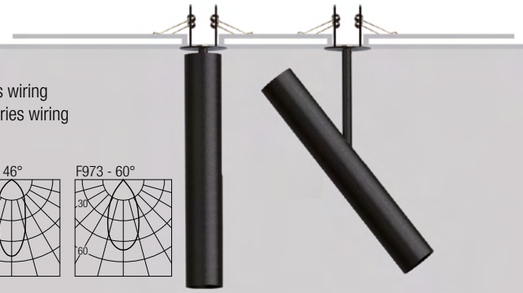

Code Construction


JSR1 X X X

	S	**M**	**W**			
	36°	46°	60°			
24	**27**	**30**	**35**	**40**	**DW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	
1	**5**	**C**				
White	Black	Custom				

Accessories

AT064R01040
Airtight recessed housing for insulated ceiling


IC064R01040
Recessed housing for insulated ceiling



MP-R040
Baseplate



RO1040
T-bar baseplate



LJ01 (White) - **LJ01B** (Black)
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers


CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

TEDDY R10

design: Jude Allen


40 mm 1,57" IP20 Class 2



Semi-recessed projector

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**770 lm**
2700K	**1125 lm**
3000K	**1180 lm**
3500K	**1195 lm**
4000K	**1178 lm**
DW	**667 lm**





Code Construction


TYR1 X X X

24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm
1	**2**	**3**	**4**		
15°	24°	36°	60°		
1	**5**	**C**			
White	Black	Custom			

Accessories

AT064R01040
Airtight recessed housing for insulated ceiling


IC064R01040
Recessed housing for insulated ceiling



MP-R040
Baseplate



RO1040
T-bar baseplate



LH04
Low luminance hex louvre

GEL45
Colour corrective poly gel, consult with factory

OPT4515 15°
OPT4524 24°
OPT4536 36°
OPT4560 60°
Field changeable optic

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers


CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

TEDDY R6

design: Jude Allen


40 mm 1,57" IP20 Class 2




Semi-recessed projector

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**434 lm**
2700K	**553 lm**
3000K	**579 lm**
3500K	**586 lm**
4000K	**579 lm**
DW	**383 lm**



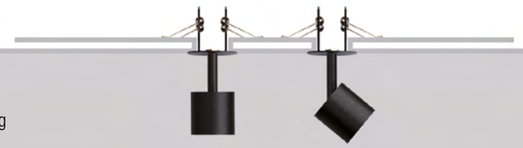

Code Construction


TYR6 X X X

24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm
1	**2**	**3**	**4**		
15°	24°	36°	60°		
1	**5**	**C**			
White	Black	Custom			

Accessories

AT064R01040
Airtight recessed housing for insulated ceiling


IC064R01040
Recessed housing for insulated ceiling



MP-R040
Baseplate



RO1040
T-bar baseplate



LH03
Low luminance hex louvre

GEL35
Colour corrective poly gel, consult with factory

OPT3515 15°
OPT3524 24°
OPT3536 36°
OPT3560 60°
Field changeable optic

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

BACK

ELIA S6


design: Jude Allen

IP20 Class 2

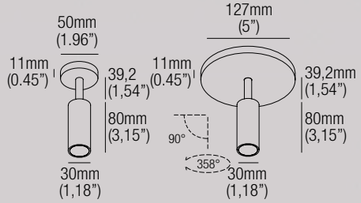

Surface projector

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam





Code Construction

ELIS6 X X X X

- 1 Mini, 2 Standard
- 24 2400K, 27 2700K, 30 3000K, 35 3500K, 40 4000K, DW Dim to Warm
- S 25°, M 45°
- 1 White, 5 Black, C Custom

Accessories

LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers


CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

ELIJAH S6


design: Jude Allen

IP20 Class 2

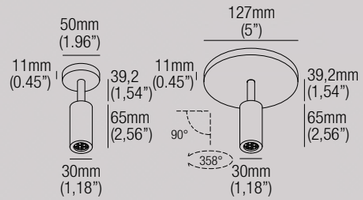

Surface projector

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam





Code Construction

ELJS6 X X X X

- 1 Mini, 2 Standard
- 24 2400K, 27 2700K, 30 3000K, 35 3500K, 40 4000K, DW Dim to Warm
- S 25°, M 45°
- 1 White, 5 Black, C Custom

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers


CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

ELIA S10


design: Jude Allen

IP20 Class 2

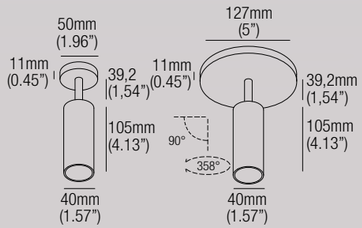

Surface projector

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

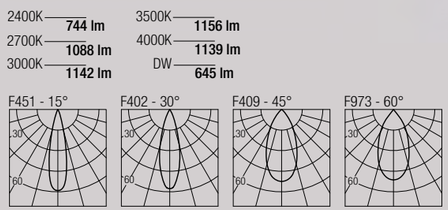



Code Construction

ELIS1 X X X X

- 1 Mini, 2 Standard
- 24 2400K, 27 2700K, 30 3000K, 35 3500K, 40 4000K, DW Dim to Warm
- S 15°, M 30°, F 45°, W 60°
- 1 White, 5 Black, C Custom

Accessories

LH02
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers


CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

ELIJAH S10


design: Jude Allen

IP20 Class 2

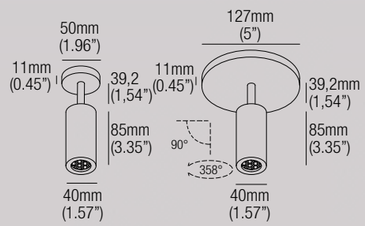

Surface projector

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

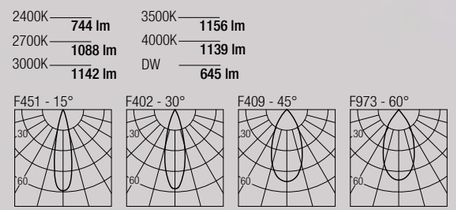



Code Construction

ELJS1 X X X X

- 1 Mini, 2 Standard
- 24 2400K, 27 2700K, 30 3000K, 35 3500K, 40 4000K, DW Dim to Warm
- S 15°, M 30°, F 45°, W 60°
- 1 White, 5 Black, C Custom

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers


CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

ELO S6

design: Jude Allen


IP20 **Class 2**

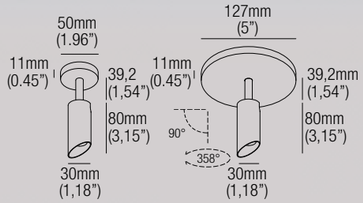

Surface projector

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**

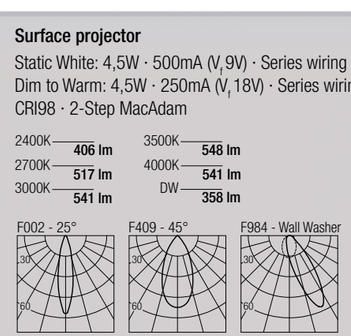



Code Construction

ELOS6 X X X X

- **1** White · **5** Black · **C** Custom
- **S** 25° · **M** 45° · **D** Wall Washer
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** Mini · **2** Standard

Accessories

LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers


CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

JOS S2

design: Roberto Mantovani


IP20 **Class 2**

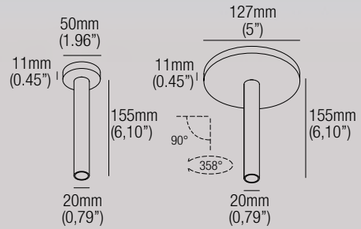

Surface projector

1,5W · 500mA (V_f 2,9V) · Series wiring
CRI90 · 3-Step MacAdam

500mA	
2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**





Code Construction

JSS2 X X X X

- **1** White · **5** Black · **C** Custom
- **1** 20° · **2** 40°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **1** Mini · **2** Standard

Accessories

L001
Low luminance hex louvre

500mA Drivers


CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V

ELO S10

design: Jude Allen


IP20 **Class 2**

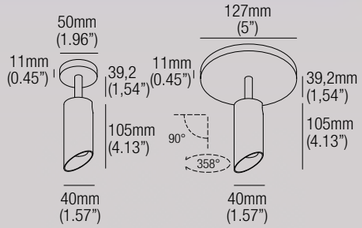

Surface projector

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**744 lm**	3500K	**1156 lm**
2700K	**1088 lm**	4000K	**1139 lm**
3000K	**1142 lm**	DW	**645 lm**

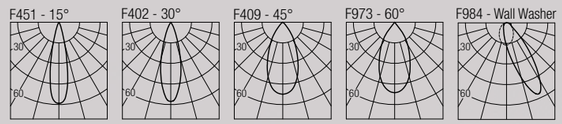



Code Construction

ELOS1 X X X X

- **1** White · **5** Black · **C** Custom
- **S** 15° · **M** 30° · **F** 45° · **W** 60° · **D** Wall Washer
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** Mini · **2** Standard

Accessories

LH02
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers


CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

JOS S6

design: Roberto Mantovani


IP20 **Class 2**

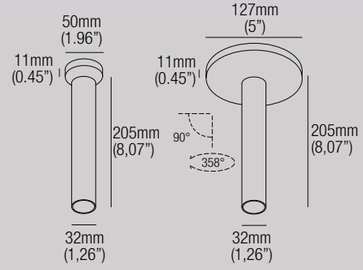

Surface projector

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**





Code Construction

JSS6 X X X X

- **1** White · **5** Black · **C** Custom
- **1** 25° · **2** 45°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** Mini · **2** Standard

Accessories

LJ02 (White) - **LJ02B** (Black)
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

SURFACE PROJECTORS

JOS S10

design: Roberto Mantovani


IP20 **Class 2**

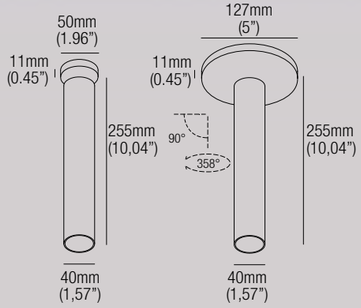

Surface projector

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**728 lm**
2700K	**1064 lm**
3000K	**1116 lm**
3500K	**1130 lm**
4000K	**1114 lm**
DW	**630 lm**





Code Construction

JSS1 X X X X

- **1** Mini · **2** Standard
- **S** 36° · **M** 46° · **W** 60°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** White · **5** Black · **C** Custom

Accessories

LJ01 (White) - **LJ01B** (Black)
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers


CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

TEDDY S6

design: Jude Allen

IP20 **Class 2**

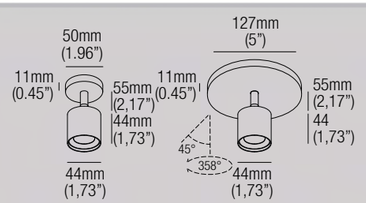


Surface projector

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**434 lm**
2700K	**553 lm**
3000K	**579 lm**
3500K	**586 lm**
4000K	**579 lm**
DW	**383 lm**





Code Construction

TYS6 X X X X

- **1** Mini · **2** Standard
- **1** 15° · **2** 24° · **3** 36° · **4** 60°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** White · **5** Black · **C** Custom

Accessories

LH03
Low luminance hex louvre

GEL35
Colour corrective poly gel, consult with factory

OPT3515 15°
OPT3524 24°
OPT3536 36°
OPT3560 60°
Field changeable optic

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V


FLEXALIGHTING

SURFACE PROJECTORS

TEDDY S10

design: Jude Allen

IP20 **Class 2**

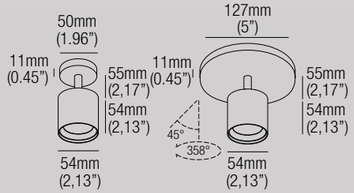


Surface projector

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam



2400K	**770 lm**
2700K	**1125 lm**
3000K	**1180 lm**
3500K	**1195 lm**
4000K	**1178 lm**
DW	**667 lm**



Code Construction

TYS1 X X X X

- **1** Mini · **2** Standard
- **1** 15° · **2** 24° · **3** 36° · **4** 60°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- Cylinder: **1** White · **5** Black · **C** Custom

Accessories

LH04
Low luminance hex louvre

GEL45
Colour corrective poly gel, consult with factory

OPT4515 15°
OPT4524 24°
OPT4536 36°
OPT4560 60°
Field changeable optic

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers


CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

BULL 10 BASE

design: Lapo Grassellini

IP20




Surface projector

Static White: 9W
Dim to Warm: 7,2W
CRI98 · 2-Step MacAdam



2400K	**728 lm**
2700K	**1064 lm**
3000K	**1116 lm**
3500K	**1130 lm**
4000K	**1114 lm**
DW	**630 lm**



Code Construction

BB1 X X X 9 X

- **S** 36° · **M** 46° · **W** 60°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- Body: **1** White · **5** Black · **C** Custom
- Cylinder: **1** White · **5** Black · **C** Custom

Accessories

BUX1NA
Low luminance louver


BUX1FL
Adjustable barn door ˜ aps

SURFACE PROJECTORS

BULL 20 BASE

design: Lapo Grassellini

IP20




Surface projector

18W

CRI95 · 2-Step MacAdam

2700K	**1659 lm**
3000K	**1752 lm**
3500K	**1873 lm**
4000K	**1925 lm**





Code Construction

BB2 X X X 9 X

	S	**M**	**W**
	23°	35°	52°
27	**30**	**35**	**40**
2700K	3000K	3500K	4000K
Body **1**		**5**	**C**
	White	Black	Custom
Cylinder **1**		**5**	**C**
	White	Black	Custom

Accessories

BUX2NA
Low luminance louver


BUX2FL
Adjustable barn door ¯ aps



BULL 40 BASE

design: Lapo Grassellini

IP20




Surface projector

36W

CRI95 · 2-Step MacAdam

2700K	**3400 lm**
3000K	**3660 lm**
3500K	**3780 lm**
4000K	**3900 lm**





Code Construction

BB4 X X X 9 X

	S	**M**	**W**
	11°	19°	42°
27	**30**	**35**	**40**
2700K	3000K	3500K	4000K
Body **1**		**5**	**C**
	White	Black	Custom
Cylinder **1**		**5**	**C**
	White	Black	Custom

Accessories

BUX4NA
Low luminance louver

BUX4FL
Adjustable barn door ¯ aps





SURFACE PROJECTORS

BULL 10 LAY

design: Lapo Grassellini

IP20






Surface projector

Static White: 9W
Dim to Warm: 7,2W
CRI98 · 2-Step MacAdam

2400K	**728 lm**
2700K	**1064 lm**
3000K	**1116 lm**
3500K	**1130 lm**
4000K	**1114 lm**
DW	**630 lm**



Code Construction

BX1 X X X 9 X

- Cylinder: **1** White · **5** Black · **C** Custom
- Body: **1** White · **5** Black · **C** Custom
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **S** 36° · **M** 46° · **W** 60°

Accessories

BUX1NA
Low luminance louver




BUX1FL
Adjustable barn door ¨aps




BULL 20 LAY

design: Lapo Grassellini

IP20






Surface projector

18W
CRI95 · 2-Step MacAdam

2700K	**1659 lm**
3000K	**1752 lm**
3500K	**1873 lm**
4000K	**1925 lm**



Code Construction

BX2 X X X 9 X

- Cylinder: **1** White · **5** Black · **C** Custom
- Body: **1** White · **5** Black · **C** Custom
- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **S** 23° · **M** 35° · **W** 52°

Accessories

BUX2NA
Low luminance louver



BUX2FL
Adjustable barn door ¨aps




SURFACE PROJECTORS

BULL 40 LAY

design: Lapo Grassellini

IP20



Surface projector

36W

CRI95 · 2-Step MacAdam

		F904 - 11°	F905 - 19°	F906 - 42°
2700K	**3400 lm**	30 60	30 60	30 60
3000K	**3660 lm**			
3500K	**3780 lm**			
4000K	**3900 lm**			



Code Construction

BX4 X X X 9 X

- **S** 11° · **M** 19° · **W** 42°
- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- Body: **1** White · **5** Black · **C** Custom
- Cylinder: **1** White · **5** Black · **C** Custom

Accessories

BUX4NA
Low luminance louver


BUX4FL
Adjustable barn door ~ aps

SURFACE PROJECTORS

SWAN 10

design: Lapo Grassellini


IP20 Class 2



Surface projector

Static White: 9W
Dim to Warm: 7,2W
CRI98 · 2-Step MacAdam

2400K	**728 lm**
2700K	**1064 lm**
3000K	**1116 lm**
3500K	**1130 lm**
4000K	**1114 lm**
DW	**630 lm**





Code Construction

SW1 X X 9 X

S	**M**	**W**
36°	46°	60°

24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm

1	**5**	**C**
White	Black	Custom

Accessories - Accessori

LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V


Tunable White - 500mA Drivers

DL0561S1 (1..3) IP20
Dimming: 0-10V

SWAN X120

design: Lapo Grassellini


IP20 Class 2



Surface projector

Static White: 2x9W · 500mA (V_f 2x18V) · Series wiring
Dim to Warm: 2x7,2W · 400mA (V_f 2x18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**1456 lm**
2700K	**2128 lm**
3000K	**2232 lm**
3500K	**1260 lm**
4000K	**2228 lm**
DW	**1260 lm**





Code Construction

SWX12 X X 9 X

S	**M**	**W**
36°	46°	60°

24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm

1	**5**	**C**
White	Black	Custom

Accessories - Accessori

2xLH01
Low luminance hex louvre

Static White - 500mA Drivers

(2x) CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

(2x) CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers

DL0561S1 (1) IP20
Dimming: 0-10V




SURFACE PROJECTORS

SWAN X130

design: Lapo Grassellini

IP20 Class 2



Surface projector

Static White: 3x9W · 500mA (V_f 3x18V) · Series wiring
Dim to Warm: 3x7,2W · 400mA (V_f 3x18V) · Series wiring
CRI98 · 2-Step MacAdam

	F971 - 36°	F972 - 46°	F973 - 60°
2400K	**2232 lm**		
2700K	**3264 lm**		
3000K	**3426 lm**		
3500K	**3468 lm**		
4000K	**3417 lm**		
DW	**1935 lm**		



Code Construction

SWX13 X X 9 X

- **S** 36° · **M** 46° · **W** 60°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** White · **5** Black · **C** Custom

Accessories - Accessori

3xLH01
Low luminance hex louvre

Static White - 500mA Drivers

(3x) CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

(3x) CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1) IP20
Dimming: PHASE - 0-10V


Tunable White - 500mA Drivers

DL0561S1 (1) IP20
Dimming: 0-10V

PUFF

design: Lapo Grassellini


IP20 Class 2



Surface projector

2W · 250mA (V_f 8,7V) · Series wiring
CRI90 · 3-Step MacAdam

	F005 - 18°	F006 - 40°
2700K	**178 lm**	
3000K	**186 lm**	
3500K	**194 lm**	
4000K	**206 lm**	





Code Construction

PU X X X X

- **L** Low luminance louver · **0** No low luminance louver
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm · **TW** Tunable White
- **S** 18° · **F** 40°
- **1** White · **5** Black · **C** Custom

250mA Drivers

CCPR010A-250 (1..4) IP20
Dimming: PHASE - 0-10V

CCPR040A-250 (1..6) IP20
Dimming: PHASE - 0-10V




BACK

120V SINGLE CIRCUIT TRACK


IP20 c UL us




The single circuit track system is designed for surface installations. It features electriÿed tracks made from extruded aluminium alloy, with copper conductor cables housed in high insulation resistance PVC extruded proÿles. The system operates at 100/120V with a 15A mains power supply, and can also handle 380/440V industrial mains voltage.
A variety of accessories are available, including linear, corner, tee, cross, and ¯exible joints, enabling the coupling of multiple tracks.



Code Construction



Load schemes

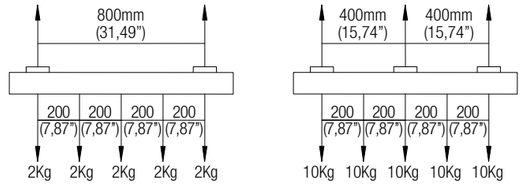

Accessories



GES-11-2 White
GES-11-3 Black
Live feed



GES-14-2 White
GES-14-3 Black
Live middle feed



GES-21-2 White
GES-21-3 Black
Linear coupler



GES-34-2 White
GES-34-3 Black
Live L feed



GES-41-2 White
GES-41-3 Black
Dead end




GES-SK-KIT-30-2 White
GES-SK-KIT-30-3 Black
Suspension kit, 2,74mm (9') cable

120V TRIPLE CIRCUIT DIMMING TRACK


IP20 c UL us




Three-phase track system for surface or recessed installation. The electriÿed tracks are made of extruded aluminium alloy. The copper conductor cables are housed in high insulation resistance PVC extruded proÿles. 230/250V - 16A mains power supply voltage and 380/440V industrial mains voltage. The system includes a wide range of accessories, linear, corner, tee, cross and ¯exible joints, allowing multiple tracks to be coupled.



Code Construction



Load schemes

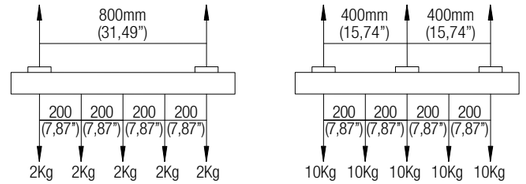

Accessories



XTSC-611-2 White
XTSC-611-3 Black
Live feed



XTSC-614-2 White
XTSC-614-3 Black
Live middle feed



XTSC-621-2 White
XTSC-621-3 Black
Linear coupler



XTSC-634-2 White
XTSC-634-3 Black
Live L feed



XTSC-635-2 White
XTSC-635-3 Black
Live L feed reverse polarity



XTS-41-2 White
XTS-41-3 Black
Dead end




XTSC-SK-KIT-2 White
XTSC-SK-KIT-3 Black
Suspension kit, 2,74mm (9') cable


BACK

WAND 1020

design: Jude Allen

IP20

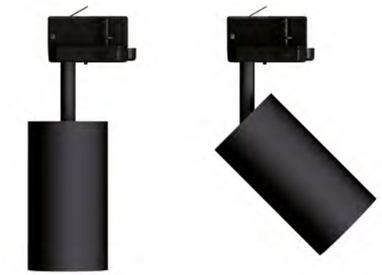




Projector for 120V tracks

9W ·18W

CRI98 · 2-Step MacAdam

	9W	18W
2700K	**1137 lm**	**2165 lm**
3000K	**1196 lm**	**2279 lm**
3500K	**1311 lm**	**2498 lm**
4000K	**1272 lm**	**2423 lm**

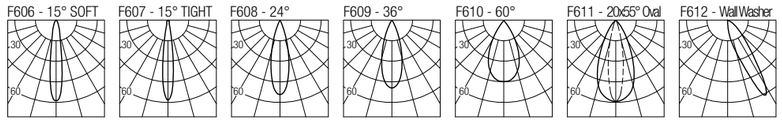

Code Construction

WD X X X X X

- Track: **1** 1-Circuit Phase; **3** 3-Circuit Phase and 0-10V
- Power: **9** 9W; **18** 18W
- **27** 2700K; **30** 3000K; **35** 3500K; **40** 4000K
- **1** 15° Soft; **2** 15° Tight; **3** 24°; **4** 36°; **5** 60°; **6** 20x55° Oval; **7** Wall Washer
- **1** White; **5** Black; **C** Custom

Accessories

LH06
Low luminance hex louvre

GEL50
Colour corrective poly gel, consult with factory


OPT5015S 15° Soft beam
OPT5015T 15° Tight beam
OPT5024 24°
OPT5036 36°
OPT5060 60°
OPT500 20x55° Oval
OPT50WW Wall Washer
Field changeable optic

BULL 40

design: Lapo Grassellini

IP20






Projector for 120V tracks

36W

CRI95 · 2-Step MacAdam

2700K	**3400 lm**
3000K	**3660 lm**
3500K	**3780 lm**
4000K	**3900 lm**



Code Construction

BU4 X X X 9 X

- **S** 11°; **M** 19°; **W** 42°
- **27** 2700K; **30** 3000K; **35** 3500K; **40** 4000K
- Body: **1** White; **5** Black; **C** Custom
- Cylinder: **1** White; **5** Black; **C** Custom

Accessories

BUX4NA
Low luminance louver

BUX4FL
Adjustable barn door ~ aps


BACK

24V SURFACE SHALLOW TRACK

IP20 Class 2 c UL us



A shallow proÿle for surface or pendant applications. The LV track range is a miniaturized, highly versatile low voltage track lighting system, crafted with premium-grade materials and ÿnishes. Featuring a no-tool modular conÿguration for the luminaires, it offers endless adaptability and possibilities.



Code Construction


H01 X

WH White — **BL** Black

24VDC Drivers

CV2496A 96W IP65
Dimming: PHASE - 0-10V


Load schemes - Schemi di carico

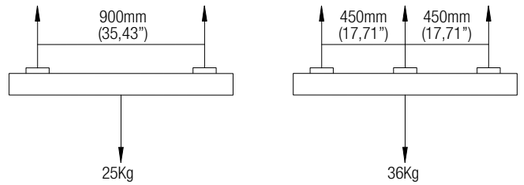


Accessories




LFS1-WH White
LFS1-BL Black
Power feed, short



LCI1-WH White
LCI1-BL Black
Straight power connector



LCR1-WH White
LCR1-BL Black
Horizontal power connector



LCR4-WH White
LCR4-BL Black
Internal vertical power connector



SB1
Straight brace, black



LB1
Horizontal brace, black



LB2
Vertical brace, black



EC3-WH White
EC3-BL Black
Aluminium end cap closed



EC4-WH White
EC4-BL Black
Aluminium end cap open



CV2-WH White
CV2-BL Black
Aluminium cover 1,22m (4')




SSK-WH White
SSK-BL Black
Suspension kit, 1,5m (5') cable

24V SURFACE DEEP TRACK

IP20 Class 2 c UL us



A deep proÿle for surface or pendant applications. The LV track range is a miniaturized, highly versatile low voltage track lighting system, crafted with premium-grade materials and ÿnishes. Featuring a no-tool modular conÿguration for the luminaires, it offers endless adaptability and possibilities.



Code Construction


H03 X

WH White — **BL** Black

24VDC Drivers

CV2496A 96W IP65
Dimming: PHASE - 0-10V


Load schemes - Schemi di carico

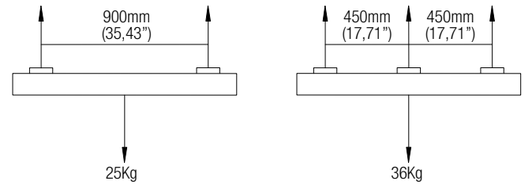


Accessories




LFS1-WH White
LFS1-BL Black
Power feed, short



LCI1-WH White
LCI1-BL Black
Straight power connector



LCR1-WH White
LCR1-BL Black
Horizontal power connector



LCR4-WH White
LCR4-BL Black
Internal vertical power connector



SB1
Straight brace, black



LB1
Horizontal brace, black



LB2
Vertical brace, black



EC1-WH White
EC1-BL Black
Aluminium end cap closed



EC2-WH White
EC2-BL Black
Aluminium end cap open



CV1-WH White
CV1-BL Black
Aluminium cover 1,22m (4')



SSK-WH White
SSK-BL Black
Suspension kit, 1,5m (5') cable


BACK

24V RECESSED DEEP TRACK

IP20 Class 2 c UL us



A deep proÿle for recessed applications. The LV track range is a miniaturized, highly versatile low voltage track lighting system, crafted with premium-grade materials and ÿnishes. Featuring a no-tool modular conÿguration for the luminaires, it offers endless adaptability and possibilities.



Code Construction


R01 X

WH White — **BL** Black

24VDC Drivers

CV2496A 96W IP65
Dimming: PHASE - 0-10V


Load schemes - Schemi di carico

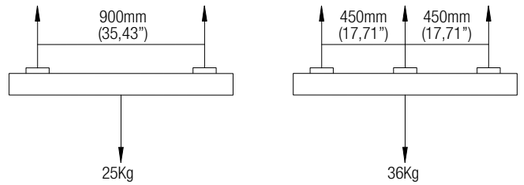


Accessories




LFS1-WH White
LFS1-BL Black
Power feed, short



LCI1-WH White
LCI1-BL Black
Straight power connector



LCR1-WH White
LCR1-BL Black
Horizontal power connector



LCR4-WH White
LCR4-BL Black
Internal vertical power connector



SB3
Side brace kit



LB1
Horizontal brace, black



LB2
Vertical brace, black




RC1
Back mount clip, galvanized



EC1-WH White
EC1-BL Black
Aluminium end cap closed



EC2-WH White
EC2-BL Black
Aluminium end cap open




CV1-WH White
CV1-BL Black
Aluminium cover 1,22m (4')

24V TRIMLESS DEEP TRACK

IP20 Class 2 c UL us



A deep proÿle for trimless recessed applications. The LV track range is a miniaturized, highly versatile low voltage track lighting system, crafted with premium-grade materials and ÿnishes. Featuring a no-tool modular conÿguration for the luminaires, it offers endless adaptability and possibilities.



Code Construction


T02 X

WH White — **BL** Black

24VDC Drivers

CV2496A 96W IP65
Dimming: PHASE - 0-10V


Load schemes - Schemi di carico

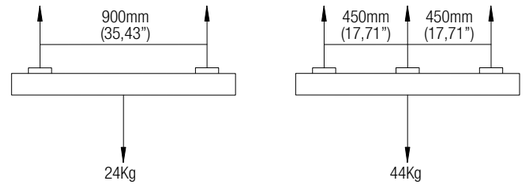


Accessories




LFS1-WH White
LFS1-BL Black
Power feed, short



LCI1-WH White
LCI1-BL Black
Straight power connector



LCR1-WH White
LCR1-BL Black
Horizontal power connector



LCR4-WH White
LCR4-BL Black
Internal vertical power connector



SB1
Straight brace, black



LB1
Horizontal brace, black



LB2
Vertical brace, black



RC1
Back mount clip, galvanized



EC1-WH White
EC1-BL Black
Aluminium end cap closed



EC2-WH White
EC2-BL Black
Aluminium end cap open




CV1-WH White
CV1-BL Black
Aluminium cover 1,22m (4')

ELIA X6

design: Jude Allen


IP20 Class 2 **JA8**





Projector for 24V tracks
Static White: 4,5W · 24VDC
Dim to Warm: 4,5W · 24VDC
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction

ELIX6 X X X

24	27	30	35	40	DW
2400K	2700K	3000K	3500K	4000K	Dim to Warm

S	M
25°	45°

1	5	C
White	Black	Custom

Accessories

LH01
Low luminance hex louvre

24VDC Drivers


CV2496A (1..18) IP65
Dimming: PHASE - 0-10V

ELIJAH X6

design: Jude Allen


IP20 Class 2 **JA8**





Projector for 24V tracks
Static White: 4,5W · 24VDC
Dim to Warm: 4,5W · 24VDC
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction

ELJX6 X X X

24	27	30	35	40	DW
2400K	2700K	3000K	3500K	4000K	Dim to Warm

S	M
25°	45°

1	5	C
White	Black	Custom

24VDC Drivers


CV2496A (1..18) IP65
Dimming: PHASE - 0-10V

ELIA X10

design: Jude Allen


IP20 Class 2 **JA8**





Projector for 24V tracks
Static White: 9W · 24VDC
Dim to Warm: 7,2W · 24VDC
CRI98 · 2-Step MacAdam

2400K	**744 lm**		
2700K	**1088 lm**		
3000K	**1142 lm**		
3500K	**1156 lm**		
4000K	**1139 lm**		
DW	**645 lm**		



Code Construction

ELIX1 X X X

24	27	30	35	40	DW
2400K	2700K	3000K	3500K	4000K	Dim to Warm

S	M	F	W
15°	30°	45°	60°

1	5	C
White	Black	Custom

Accessories

LH02
Low luminance hex louvre

24VDC Drivers


CV2496A (1..9) IP65
Dimming: PHASE - 0-10V

ELIJAH X10

design: Jude Allen


IP20 Class 2 **JA8**





Projector for 24V tracks
Static White: 9W · 24VDC
Dim to Warm: 7,2W · 24VDC
CRI98 · 2-Step MacAdam

2400K	**744 lm**		
2700K	**1088 lm**		
3000K	**1142 lm**		
3500K	**1156 lm**		
4000K	**1139 lm**		
DW	**645 lm**		



Code Construction

ELJX1 X X X

24	27	30	35	40	DW
2400K	2700K	3000K	3500K	4000K	Dim to Warm

S	M	F	W
15°	30°	45°	60°

1	5	C
White	Black	Custom

24VDC Drivers

CV2496A (1..9) IP65
Dimming: PHASE - 0-10V


BACK

ELO X6

design: Jude Allen


IP20 Class 2 **JA8**





Projector for 24V tracks
Static White: 4,5W · 24VDC
Dim to Warm: 4,5W · 24VDC
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction

ELOX6 X X X

24	**27**	**30**	**35**	**40**	**DW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	
S		**M**		**D**		
25°		45°		Wall Washer		
1		**5**		**C**		
White		Black		Custom		

Accessories

LH01
Low luminance hex louvre

24VDC Drivers


CV2496A (1..18) IP65
Dimming: PHASE - 0-10V

JOS X2

design: Roberto Mantovani


IP20 Class 2 **JA8**





Projector for 24V tracks
1,5W · 24VDC
CRI90 · 3-Step MacAdam

	500mA
2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**



Code Construction

JSX2 X X X

27	**30**	**35**	**40**	
2700K	3000K	3500K	4000K	
1	**2**			
20°	40°			
1	**5**	**C**		
White	Black	Custom		

Accessories

L001
Low luminance hex louvre

24VDC Drivers


CV2496A (1..60) IP65
Dimming: PHASE - 0-10V

ELO X10

design: Jude Allen


IP20 Class 2 **JA8**





Projector for 24V tracks
Static White: 9W · 24VDC
Dim to Warm: 7,2W · 24VDC
CRI98 · 2-Step MacAdam

2400K	**744 lm**
2700K	**1088 lm**
3000K	**1142 lm**
3500K	**1156 lm**
4000K	**1139 lm**
DW	**645 lm**

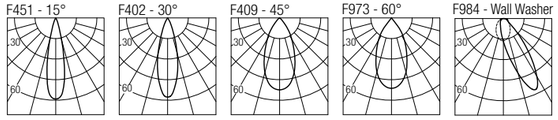

Code Construction

ELOX1 X X X

24	**27**	**30**	**35**	**40**	**DW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	
S		**M**	**F**	**W**	**D**	
15°		30°	45°	60°	Wall Washer	
1		**5**		**C**		
White		Black		Custom		

Accessories

LH02
Low luminance hex louvre

24VDC Drivers


CV2496A (1..9) IP65
Dimming: PHASE - 0-10V

JOS X6

design: Roberto Mantovani


IP20 Class 2 **JA8**





Projector for 24V tracks
Static White: 4,5W · 24VDC
Dim to Warm: 4,5W · 24VDC
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction

JSX6 X X X

24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm
1	**2**				
25°	45°				
1	**5**	**C**			
White	Black	Custom			

Accessories

LJ02 (White) - **LJ02B** (Black)
Low luminance hex louvre


24VDC Drivers

CV2496A (1..18) IP65
Dimming: PHASE - 0-10V

JOS X10

design: Roberto Mantovani


IP20 **Class 2** **JA8**





Projector for 24V tracks
Static White: 9W · 24VDC
Dim to Warm: 7,2W · 24VDC
CRI98 · 2-Step MacAdam

2400K	**728 lm**
2700K	**1064 lm**
3000K	**1116 lm**
3500K	**1130 lm**
4000K	**1114 lm**
DW	**630 lm**



Code Construction

JSX1 X X X

- **S** 36° · **M** 46° · **W** 60°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** White · **5** Black · **C** Custom

Accessories

LJ01 (White) - **LJ01B** (Black)
Low luminance hex louvre


24VDC Drivers

CV2496A (1..9) IP65
Dimming: PHASE - 0-10V

TEDDY X10

design: Jude Allen


IP20 **Class 2** **JA8**





Projector for 24V tracks
Static White: 9W · 24VDC
Dim to Warm: 7,2W · 24VDC
CRI98 · 2-Step MacAdam

2400K	**770 lm**
2700K	**1125 lm**
3000K	**1180 lm**
3500K	**1195 lm**
4000K	**1178 lm**
DW	**667 lm**



Code Construction

TYX1 X X X

- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** 15° · **2** 24° · **3** 36° · **4** 60°
- **1** White · **5** Black · **C** Custom

Accessories

LH04
Low luminance hex louvre

GEL45
Colour corrective poly gel, consult with factory

OPT4515 15°
OPT4524 24°
OPT4536 36°
OPT4560 60°
Field changeable optic

24VDC Drivers


CV2496A (1..9) IP65
Dimming: PHASE - 0-10V

TEDDY X6

design: Jude Allen


IP20 **Class 2** **JA8**





Projector for 24V tracks
Static White: 4,5W · 24VDC
Dim to Warm: 4,5W · 24VDC
CRI98 · 2-Step MacAdam

2400K	**434 lm**	3500K	**586 lm**
2700K	**553 lm**	4000K	**579 lm**
3000K	**579 lm**	DW	**383 lm**



Code Construction

TYX6 X X X

- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** 15° · **2** 24° · **3** 36° · **4** 60°
- **1** White · **5** Black · **C** Custom

Accessories

LH03
Low luminance hex louvre

GEL35
Colour corrective poly gel, consult with factory

OPT3515 15°
OPT3524 24°
OPT3536 36°
OPT3560 60°
Field changeable optic


24VDC Drivers

CV2496A (1..18) IP65
Dimming: PHASE - 0-10V

WAND X1020


design: Jude Allen


IP20



Projector for 24V tracks
9W ·18W
CRI98 · 2-Step MacAdam

	9W	18W
2700K	**1137 lm**	**2165 lm**
3000K	**1196 lm**	**2279 lm**
3500K	**1311 lm**	**2498 lm**
4000K	**1272 lm**	**2423 lm**



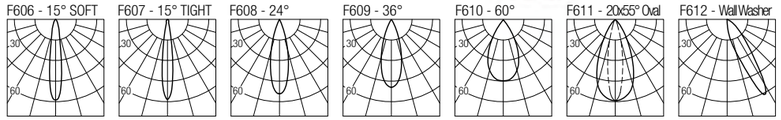

Code Construction

WDX X X X X

- Power **9** 9W · **18** 18W
- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **1** 15° Soft · **2** 15° Tight · **3** 24° · **4** 36° · **5** 60° · **6** 20x55° Oval · **7** Wall Washer
- **1** White · **5** Black · **C** Custom

Accessories

LH06
Low luminance hex louvre

GEL50
Colour corrective poly gel, consult with factory

OPT5015S 15° Soft beam
OPT5015T 15° Tight beam
OPT5024 24°
OPT5036 36°
OPT5060 60°
OPT500 20x55° Oval
OPT50WW Wall Washer
Field changeable optic

24VDC Drivers

CV2496A (9W 1..9, 18W 1..4) IP65
Dimming: PHASE - 0-10V


BACK

ESME PRECISION X10



design: Jude Allen


IP20 Class 2 c UL us



283mm
(11,14")

Linear module for 24V tracks
9W · 24VDC
CRI95 · 3-Step MacAdam

2700K	**946 lm**
3000K	**1005 lm**
3500K	**1081 lm**
4000K	**1157 lm**



Code Construction

LS1024 X X X

- 27 2700K · 30 3000K · 35 3500K · 40 4000K
- 1 25° · 2 45° · 3 60° · 4 70° (Batwing)
- 1 White · 5 Black

24VDC Drivers

CV2496A (1..9) IP65
Dimming: PHASE - 0-10V

ESME PERFORMANCE X10



design: Jude Allen


IP20 Class 2 c UL us



283mm
(11,14")

Linear module for 24V tracks
9W · 24VDC
CRI98 · 3-Step MacAdam

2700K	**825 lm**
3000K	**865 lm**
3500K	**890 lm**
4000K	**985 lm**

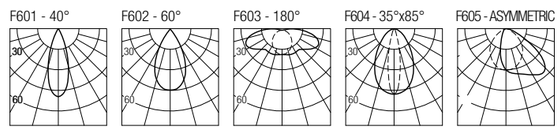

Code Construction

EPF10 X X X

- 27 2700K · 30 3000K · 35 3500K · 40 4000K
- 1 40° · 2 60° · 3 180° · 4 35°x85° (Oval) · 5 Asymmetric
- 1 White · 5 Black

24VDC Drivers


CV2496A (1..9) IP65
Dimming: PHASE - 0-10V

ESME PRECISION X20



design: Jude Allen


IP20 Class 2 c UL us



562mm
(22,13")

Linear module for 24V tracks
18W · 24VDC
CRI95 · 3-Step MacAdam

2700K	**1892 lm**
3000K	**2010 lm**
3500K	**2162 lm**
4000K	**2314 lm**



Code Construction

LS2024 X X X

- 27 2700K · 30 3000K · 35 3500K · 40 4000K
- 1 25° · 2 45° · 3 60° · 4 70° (Batwing)
- 1 White · 5 Black

24VDC Drivers

CV2496A (1..4) IP65
Dimming: PHASE - 0-10V

ESME PERFORMANCE X20



design: Jude Allen


IP20 Class 2 c UL us



562mm
(22,13")

Linear module for 24V tracks
18W · 24VDC
CRI98 · 3-Step MacAdam

2700K	**1650 lm**
3000K	**1730 lm**
3500K	**1780 lm**
4000K	**1970 lm**

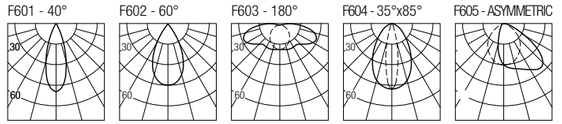

Code Construction

EPF20 X X X

- 27 2700K · 30 3000K · 35 3500K · 40 4000K
- 1 40° · 2 60° · 3 180° · 4 35°x85° (Oval) · 5 Asymmetric
- 1 White · 5 Black

24VDC Drivers


CV2496A (1..4) IP65
Dimming: PHASE - 0-10V

PROJECTORS FOR 24V TRACKS

ESME X10

design: Jude Allen

IP20 Class 2 c UL us




283mm
(11,14")

Linear module for 24V tracks
9W · 24VDC
CRI95 · 3-Step MacAdam

2700K	**898 lm**
3000K	**954 lm**
3500K	**1026 lm**
4000K	**1099 lm**

F036 - 120°





Code Construction

LD1024 X X X

- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **4** 120°
- **1** White · **5** Black

24VDC Drivers


CV2496A (1..9) IP65
Dimming: PHASE - 0-10V



ESME X20

design: Jude Allen

IP20 Class 2 c UL us




562mm
(22,13")

Linear module for 24V tracks
18W · 24VDC
CRI95 · 3-Step MacAdam

2700K	**1797 lm**
3000K	**1909 lm**
3500K	**2053 lm**
4000K	**2198 lm**

F037 - 120°





Code Construction

LD2024 X X X

- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **4** 120°
- **1** White · **5** Black

24VDC Drivers

CV2496A (1..4) IP65
Dimming: PHASE - 0-10V




FLEXALIGHTING

LINEAR SYSTEMS


MAGGY 36

design: Lapo Grassellini



Trimless system for recessed installation.
Maggy linear system allows the trimless installations of 36mm width that can be equipped with various light modules fastened to the structure via magnets. The side slots on the duct allow repositioning of the individual elements at any time.

Sistema trimless per installazione ad incasso.
Il sistema lineare Maggy permette la realizzazione di tagli trimless di larghezza 36mm, equipaggiabili con moduli luminosi di varie tipologie ÿssati alla struttura tramite calamite. Le asole laterali presenti sul canale consentono di posizionare gli apparecchi in qualsiasi punto, variandone la posizione in ogni momento.



MG36-LM
L-module




MG36-ST01
Straight module
305mm (12")

MG36-ST02
Straight module
610mm (24")

MG36-ST04
Straight module
1220mm (48")

MG36-ST06
Straight module
1829mm (72")



MG36-EC
End cap



LEONARD 36
ADJUSTABLE MODULE

The highly adjustable Leonard module remains entirely within the structure, guaranteeing maximum functionality and total invisibility of the ÿxture.

Il modulo Leonard, di elevata orientabilità, rimane interamente all'interno della struttura, garantendo la massima funzionalità combinata alla totale invisibilità dell'apparecchio.



PRINCE 36
ADJUSTABLE MODULE

The Prince module provides a fully adjustable spotlight out of the ceiling line.

Il modulo Prince permette di avere un proiettore completamente orientabile che esce dal sistema.



DAVID 36
FIXED MODULE

The David high performance, ÿxed module, remaining entirely within the structure, has no visual impact.

Il modulo David, ÿsso, rimane interamente all'interno della struttura, con un'alta prestazione ed un impatto visivo nullo.



BEN 36
LINEAR MODULE

The Ben linear module provides a line of diffuse lighting within the system.

Il modulo lineare Ben permette la realizzazione di una linea di luce diffusa all'interno del sistema.




BACK

LEONARD 36

design: Lapo Grassellini


IP20 **Class 2** **JA8**





Adjustable module for Maggy 36
4,5W · 24VDC
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction

LN36 X 9 X

- X: **S** 25° / **M** 45°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm

Accessories

LH01
Low luminance hex louvre

24VDC Drivers


CV2496A (1..18) IP65
Dimming: PHASE - 0-10V

PRINCE 36

design: Lapo Grassellini


IP20





Adjustable module for Maggy 36
9W · 24VDC
CRI98 · 2-Step MacAdam

2400K	**728 lm**	3500K	**1130 lm**
2700K	**1064 lm**	4000K	**1114 lm**
3000K	**1116 lm**	DW	**630 lm**



Code Construction

PR36 X 9 X

- X: **S** 36° / **M** 46° / **W** 60°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm

Accessories

LH01
Low luminance hex louvre

24VDC Drivers


CV2496A (1..9) IP65
Dimming: PHASE - 0-10V

DAVID 36

design: Lapo Grassellini


IP20 **Class 2** **JA8**





Fixed module for Maggy 36
9W · 24VDC
CRI98 · 2-Step MacAdam

2700K	**661 lm**	4000K	**767 lm**
3000K	**698 lm**	DW	**623 lm**
3500K	**747 lm**		



Code Construction

DA36 X 9 X

- X: **S** 25° / **M** 45°
- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm

Accessories

LH01
Low luminance hex louvre

24VDC Drivers

CV2496A (1..9) IP65
Dimming: PHASE - 0-10V

BEN 36

design: Lapo Grassellini


IP20





Linear module for Maggy 36
15W · 24VDC
CRI95 · 2-Step MacAdam

2700K	**1050 lm**
3000K	**1071 lm**
3500K	**1093 lm**
4000K	**1112 lm**



Code Construction

BE360 X

- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K


24VDC Drivers

CV2496A (1..6) IP65
Dimming: PHASE - 0-10V

LINEAR SYSTEMS


MAGGY 72

design: Lapo Grassellini




Trimless system for recessed installation.
Maggy linear system allows the trimless installations of 72mm width that can be equipped with various light modules fastened to the structure via magnets. The side slots on the duct allow repositioning of the individual elements at any time.

Sistema trimless per installazione ad incasso.
Il sistema lineare Maggy permette la realizzazione di tagli trimless di larghezza 72mm, equipaggiabili con moduli luminosi di varie tipologie ÿssati alla struttura tramite calamite. Le asole laterali presenti sul canale consentono di posizionare gli apparecchi in qualsiasi punto, variandone la posizione in ogni momento.



MG72-LM
L-module

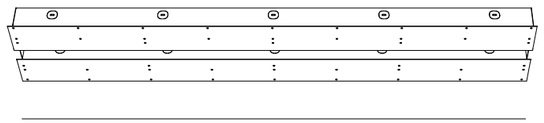


MG72-ST01
Straight module
305mm (12")

MG72-ST02
Straight module
610mm (24")

MG72-ST04
Straight module
1220mm (48")

MG72-ST06
Straight module
1829mm (72")



MG36-EC
End cap



LEONARD 72
ADJUSTABLE MODULE

The highly adjustable Leonard module remains entirely within the structure, guaranteeing maximum functionality and total invisibility of the ÿxture.

Il modulo Leonard, di elevata orientabilità, rimane interamente all'interno della struttura, garantendo la massima funzionalità combinata alla totale invisibilità dell'apparecchio.



DAVID 72
FIXED MODULE

The David high performance, ÿxed module, remaining entirely within the structure, has no visual impact.

Il modulo David, ÿsso, rimane interamente all'interno della struttura, con un'alta prestazione ed un impatto visivo nullo.



PRINCE 72
ADJUSTABLE MODULE

The Prince module provides a fully adjustable spotlight out of the ceiling line.

Il modulo Prince permette di avere un proiettore completamente orientabile che esce dal sistema.



BEN 72
LINEAR MODULE

The Ben linear module provides a line of diffuse lighting within the system.


Il modulo lineare Ben permette la realizzazione di una linea di luce diffusa all'interno del sistema.

BACK

LEONARD 72


design: Lapo Grassellini

IP20 Class 2 **JA8**



Adjustable module for Maggy 72
9W · 24VDC
CRI98 · 2-Step MacAdam

2400K	**728 lm**
2700K	**1064 lm**
3000K	**1116 lm**
3500K	**1130 lm**
4000K	**1114 lm**
DW	**630 lm**





Code Construction

LN72 X 9 X

S	M	W
36°	46°	60°

24	27	30	35	40	DW
2400K	2700K	3000K	3500K	4000K	Dim to Warm

Accessories

LH01
Low luminance hex louvre


24VDC Drivers

CV2496A (1..9) IP65
Dimming: PHASE - 0-10V

PRINCE 72


design: Lapo Grassellini

IP20 Class 2 **JA8**

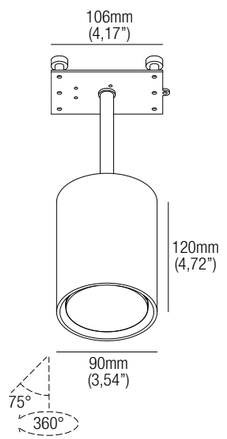

Adjustable module for Maggy 72
18W · 24VDC
CRI98 · 2-Step MacAdam

2700K	**1659 lm**
3000K	**1752 lm**
3500K	**1873 lm**
4000K	**1925 lm**





Code Construction

PR72 X 9 X

S	M	W
36°	46°	60°

27	30	35	40
2700K	3000K	3500K	4000K


24VDC Drivers

CV2496A (1..4) IP65
Dimming: PHASE - 0-10V

DAVID 72


design: Lapo Grassellini

IP20 Class 2 **JA8**



Fixed module for Maggy 72
18W · 24VDC
CRI98 · 2-Step MacAdam

2700K	**1659 lm**
3000K	**1752 lm**
3500K	**1873 lm**
4000K	**1925 lm**





Code Construction

DA72 X 9 X

S	M	W
36°	46°	60°

27	30	35	40
2700K	3000K	3500K	4000K

Accessories

LH01
Low luminance hex louvre


24VDC Drivers

CV2496A (1..4) IP65
Dimming: PHASE - 0-10V

BEN 72


design: Lapo Grassellini

IP20 Class 2 **JA8**



Linear module for Maggy 72
30W · 24VDC
CRI95 · 2-Step MacAdam

2700K	**2100 lm**
3000K	**2142 lm**
3500K	**2186 lm**
4000K	**2224 lm**





Code Construction

BE720 X

27	30	35	40
2700K	3000K	3500K	4000K

24VDC Drivers


CV2496A (1..3) IP65
Dimming: PHASE - 0-10V

BACK

ARIK 6

design: Roberto Mantovani

IP20 Class 2




Ceiling mounted luminaire

Static White: 4,5W · 500mA (V_f 9V) · Series wiring

Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**





Code Construction

AW6 X X X X

- **CC** — Remote driver
- **24** 2400K | **27** 2700K | **30** 3000K | **35** 3500K | **40** 4000K | **DW** Dim to Warm
- **1** 25° | **2** 45°
- **1** White | **5** Black | **C** Custom

Static White - 500mA Drivers

CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers


CCPR010A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

ARIK 10

design: Roberto Mantovani

IP20 Class 2




Ceiling mounted luminaire

Static White: 9W · 500mA (V_f 18V) · Series wiring

Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**728 lm**	3500K	**1130 lm**
2700K	**1064 lm**	4000K	**1114 lm**
3000K	**1116 lm**	DW	**630 lm**





Code Construction

AH X X X X

- **CC** — Remote driver
- **24** 2400K | **27** 2700K | **30** 3000K | **35** 3500K | **40** 4000K | **DW** Dim to Warm
- **1** 25° | **2** 45°
- **1** White | **5** Black | **C** Custom

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V





CEILING AND WALL MOUNTED LUMINAIRES

CRU

design: Jude Allen

IP20 **Class 2**







Ceiling mounted luminaire
9W · 120VAC
CRI98 · 2-Step MacAdam

2700K	**882 lm**
3000K	**926 lm**
3500K	**1015 lm**
4000K	**985 lm**

F407 - 45°



F449 - 60°



Code Construction

CRU X X X

- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **1** 45° · **2** 60°
- **1** White · **5** Black · **C** Custom

Accessories


LH05
Low luminance hex louvre

ART

design: Roberto Mantovani

IP65 **Class 2**







Ceiling mounted luminaire
7,5W · 24VDC · Parallel wiring
CRI98 · 2-Step MacAdam

2400K	**487 lm**
2700K	**655 lm**
3000K	**688 lm**
3500K	**697 lm**
4000K	**686 lm**


F971 - 36°




F972 - 46°



F973 - 60°



F036 - 120°



Code Construction

AT1 X X 9 X

- **S** 36° · **M** 46° · **W** 60° · **X** 120°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **2** Aluminium · **5** Black · **6** Bronze · **C** Custom

Accessories

L0D1
Low luminance hex louvre

24VDC Drivers

DLM.30 (1..3) IP20
Dimming: PHASE - 0-10V

DLM.60 (1..7) IP20
Dimming: PHASE - 0-10V


DLM.100 (1..12) IP20
Dimming: PHASE - 0-10V

CEILING AND WALL MOUNTED LUMINAIRES

SASABUNE

design: Lapo Grassellini

IP65 Class 2




Ceiling mounted luminaire

9W · 500mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2700K	**661 lm**
3000K	**698 lm**
3500K	**747 lm**
4000K	**767 lm**
DW	**623 lm**





Code Construction

SB1 X X 9 X

- **S** 25° — **W** 45°
- **27** 2700K — **30** 3000K — **35** 3500K — **40** 4000K
- **1** White — **5** Black — **C** Custom

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPR010A-250-DW (1) IP20
Dimming: PHASE - 0-10V


CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V



KELLER S

design: Roberto Mantovani

IP65 Class 2



Wall mounted luminaire

7,5W · 24VDC · Parallel wiring


CRI98 · 2-Step MacAdam

2400K	**487 lm**
2700K	**655 lm**
3000K	**688 lm**
3500K	**697 lm**
4000K	**686 lm**











Code Construction

KE1 X X 9 X

- **S** 36° — **M** 46° — **W** 60° — **X** 120°
- **24** 2400K — **27** 2700K — **30** 3000K — **35** 3500K — **40** 4000K
- **2** Aluminium — **5** Black — **6** Bronze — **C** Custom

Accessories

L0D1
Low luminance hex louvre

24VDC Drivers

DLM.30 (1..3) IP20
Dimming: PHASE - 0-10V

DLM.60 (1..7) IP20
Dimming: PHASE - 0-10V


DLM.100 (1..12) IP20
Dimming: PHASE - 0-10V

CEILING AND WALL MOUNTED LUMINAIRES

KELLER D

design: Roberto Mantovani

IP65 **Class 2**

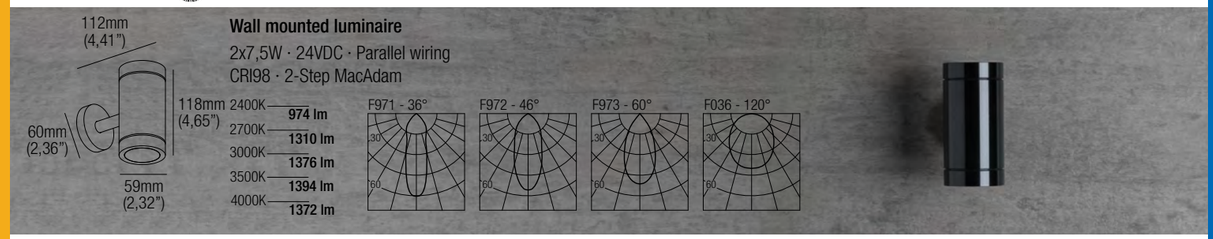

Code Construction

KE2 X X 9 X X

- **S** 36° · **M** 46° · **W** 60° · **X** 120°
- **S** 36° · **M** 46° · **W** 60° · **X** 120°

24 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K

2 Aluminium · **5** Black · **6** Bronze · **C** Custom

Accessories

2xL0D1
Low luminance hex louvre

24VDC Drivers

DLM.30 (1) IP20
Dimming: PHASE - 0-10V


DLM.60 (1..3) IP20
Dimming: PHASE - 0-10V

DLM.100 (1..6) IP20
Dimming: PHASE - 0-10V

GAGA

design: Lapo Grassellini

IP20 **Class 2**

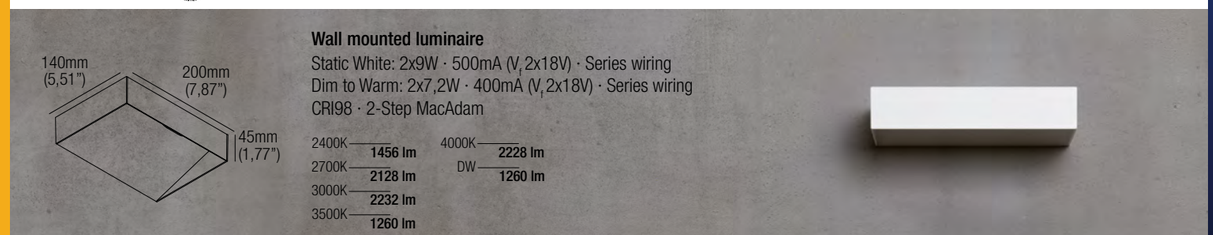

Code Construction

GG1 X X 9

24 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm

1 White · **5** Black · **C** Custom

Static White - 500mA Drivers

CCPRO40A-500 (1) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPRO40A-400 (1) IP20
Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers


DL0561S1 (1) IP20
Dimming: 0-10V

CEILING AND WALL MOUNTED LUMINAIRES

CADMO 6

design: Roberto Mantovani

IP65 **Class 2**



Wall mounted luminaire

4,5W (single) 9W (double) · 500mA (V_f 9-2x9V) · Series wiring

CRI98 · 2-Step MacAdam

	Single	Double
2700K	**384 lm**	**768 lm**
3000K	**400 lm**	**800 lm**
3500K	**433 lm**	**866 lm**
4000K	**462 lm**	**924 lm**





Code Construction

PXP X X X X X

- **S** 18° · **F** 40° · **W** 120° · **D** Blind
- **S** 18° · **F** 40° · **W** 120° · **D** Blind
- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **1** White · **5** Black · **C** Custom
- **1** Single emission · **2** Double emission

Static White - 500mA Drivers

CCPR010A-500 (1..2/1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6/1..3) IP20
Dimming: PHASE - 0-10V




BACK

PUCK

design: Roberto Mantovani


25 mm 0,98" **IP67** **Class 2**




Flush optic IP-rated downlight

1W · 350mA (V_f 2,9V) · Series wiring

CRI90 · 3-Step MacAdam



2700K	**81 lm**
3000K	**81 lm**
3500K	**100 lm**
4000K	**107 lm**



Code Construction

PK X X X

B	**N**	**Z**	**C**
White	Black	INOX AISI 316L	Custom


27	**30**	**35**	**40**
2700K	3000K	3500K	4000K

1	**2**	**9**
20°	40°	120°

1	**2**
Round	Square

Accessories

AT064R01025
Airtight recessed housing for insulated ceiling




IC064R01025
Recessed housing for insulated ceiling

MP-R025
Baseplate



R01025
T-bar baseplate



CSTY01
Recessing box



350mA Drivers

CCPR010A-350 (1..9) IP20
Dimming: PHASE - 0-10V

CCPR040A-350 (1..18) IP20
Dimming: PHASE - 0-10V



TYTUS

design: Roberto Mantovani


25 mm 0,98" **IP67** **Class 2**




Recessed optic IP-rated downlight

1W · 350mA (V_f 2,9V) · Series wiring

CRI90 · 3-Step MacAdam



2700K	**81 lm**
3000K	**81 lm**
3500K	**100 lm**
4000K	**107 lm**



Code Construction

TYU X X X


B	**N**	**C**
White	Black	Custom

27	**30**	**35**	**40**
2700K	3000K	3500K	4000K

1	**2**	**9**
20°	40°	120°

Accessories

AT064R01025
Airtight recessed housing for insulated ceiling




IC064R01025
Recessed housing for insulated ceiling

MP-R025
Baseplate



R01025
T-bar baseplate



350mA Drivers

CCPR010A-350 (1..9) IP20
Dimming: PHASE - 0-10V


CCPR040A-350 (1..18) IP20
Dimming: PHASE - 0-10V

IP-RATED DOWNLIGHTS

TYZAN

design: Roberto Mantovani


IP67 **Class 2**

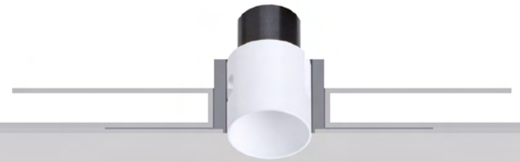


Trimless IP-rated downlight

1W · 350mA (V_f 2,9V) · Series wiring


CRI90 · 3-Step MacAdam



2700K	**81 lm**
3000K	**81 lm**
3500K	**100 lm**
4000K	**107 lm**




Code Construction



Accessories

AT064R01045
Airtight recessed housing for insulated ceiling


IC064R01045
Recessed housing for insulated ceiling




MP-R045
Baseplate




R01045
T-bar baseplate



ZQC001 White
Plasterboard recessing frame



ZQC001.BMK-WH White
ZQC001.BMK-BLK Black
ZQC001.BMK-CU Custom
Backmount frame for hard surfaces



350mA Drivers

CCPR010A-350 (1..9) IP20
Dimming: PHASE - 0-10V

CCPR040A-350 (1..18) IP20
Dimming: PHASE - 0-10V



LOTUS 2

design: Roberto Mantovani


40 mm 1,57" **IP67** **Class 2**




Flush optic IP-rated downlight

1,5W · 500mA (V_f 2,9V) · Series wiring


CRI90 · 3-Step MacAdam



	500mA
2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**




Code Construction



Accessories

AT064R01040
Airtight recessed housing for insulated ceiling


IC064R01040
Recessed housing for insulated ceiling




MP-R040
Baseplate



R01040
T-bar baseplate



CSXT01
Recessing box



LH01
Low luminance hex louvre

500mA Drivers

CCPR010A-500 (1..6) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..18) IP20
Dimming: PHASE - 0-10V



FLEXALIGHTING


IP-RATED DOWNLIGHTS

LOTUS 6

design: Roberto Mantovani

40 mm 1,57" IP67 Class 2






Flush optic IP-rated downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring

Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction


LTE X X X

- **B** White · **N** Black · **Z** INOX AISI 316L · **C** Custom
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** 25° · **2** 45° · **3** 120°
- **1** Round · **2** Square

Accessories

AT064RO1040
Airtight recessed housing for insulated ceiling


IC064RO1040
Recessed housing for insulated ceiling




MP-R040
Baseplate



RO1040
T-bar baseplate



CSXT01
Recessing box



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPRO040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

BABUS 2

design: Roberto Mantovani

40 mm 1,57" IP67 Class 2






Recessed optic IP-rated downlight

1,5W · 500mA (V_f 2,9V) · Series wiring

CRI90 · 3-Step MacAdam

	500mA
2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**



Code Construction


BT1 X X X

- **1** White · **5** Black · **C** Custom
- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **0** 10° · **1** 20° · **2** 40° · **9** 120°

Accessories

AT086RO2040
Airtight recessed housing for insulated ceiling


IC086RO2040
Recessed housing for insulated ceiling



MP-R040
Baseplate



RO2040
T-bar baseplate



CSBU01
Recessing box



LH01
Low luminance hex louvre

500mA Drivers

CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V


CCPRO040A-500 (1..18) IP20
Dimming: PHASE - 0-10V

BABUS 6

design: Roberto Mantovani

40 mm 1,57" IP67 Class 2






Recessed optic IP-rated downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction

BTE X X X

- **1** White
- **5** Black
- **C** Custom


- **24** 2400K
- **27** 2700K
- **30** 3000K
- **35** 3500K
- **40** 4000K
- **DW** Dim to Warm

- **0** 10°
- **1** 20°
- **2** 40°
- **9** 120°

Accessories

AT086R02040
Airtight recessed housing for insulated ceiling


IC086R02040
Recessed housing for insulated ceiling



MP-R040
Baseplate



R02040
T-bar baseplate



CSBU01
Recessing box



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPR010A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

BABUS 10

design: Roberto Mantovani

50 mm 1,97" IP67 Class 2






Recessed optic IP-rated downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**728 lm**	3500K	**1130 lm**
2700K	**1064 lm**	4000K	**1114 lm**
3000K	**1116 lm**	DW	**630 lm**

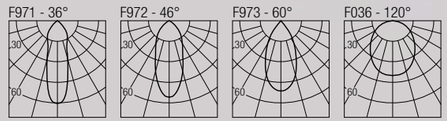

Code Construction

BN1 X X 9 X

- **24** 2400K
- **27** 2700K
- **30** 3000K
- **35** 3500K
- **40** 4000K
- **DW** Dim to Warm


- **S** 36°
- **M** 46°
- **W** 60°
- **X** 120°

- **1** White
- **5** Black
- **C** Custom

Accessories

AT086R02051
Airtight recessed housing for insulated ceiling


IC086R02051
Recessed housing for insulated ceiling



MP-R051
Baseplate



R02051
T-bar baseplate



CSBT10
Recessing box



L0D1
Low luminance hex louvre

Static White - 500mA Drivers


CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

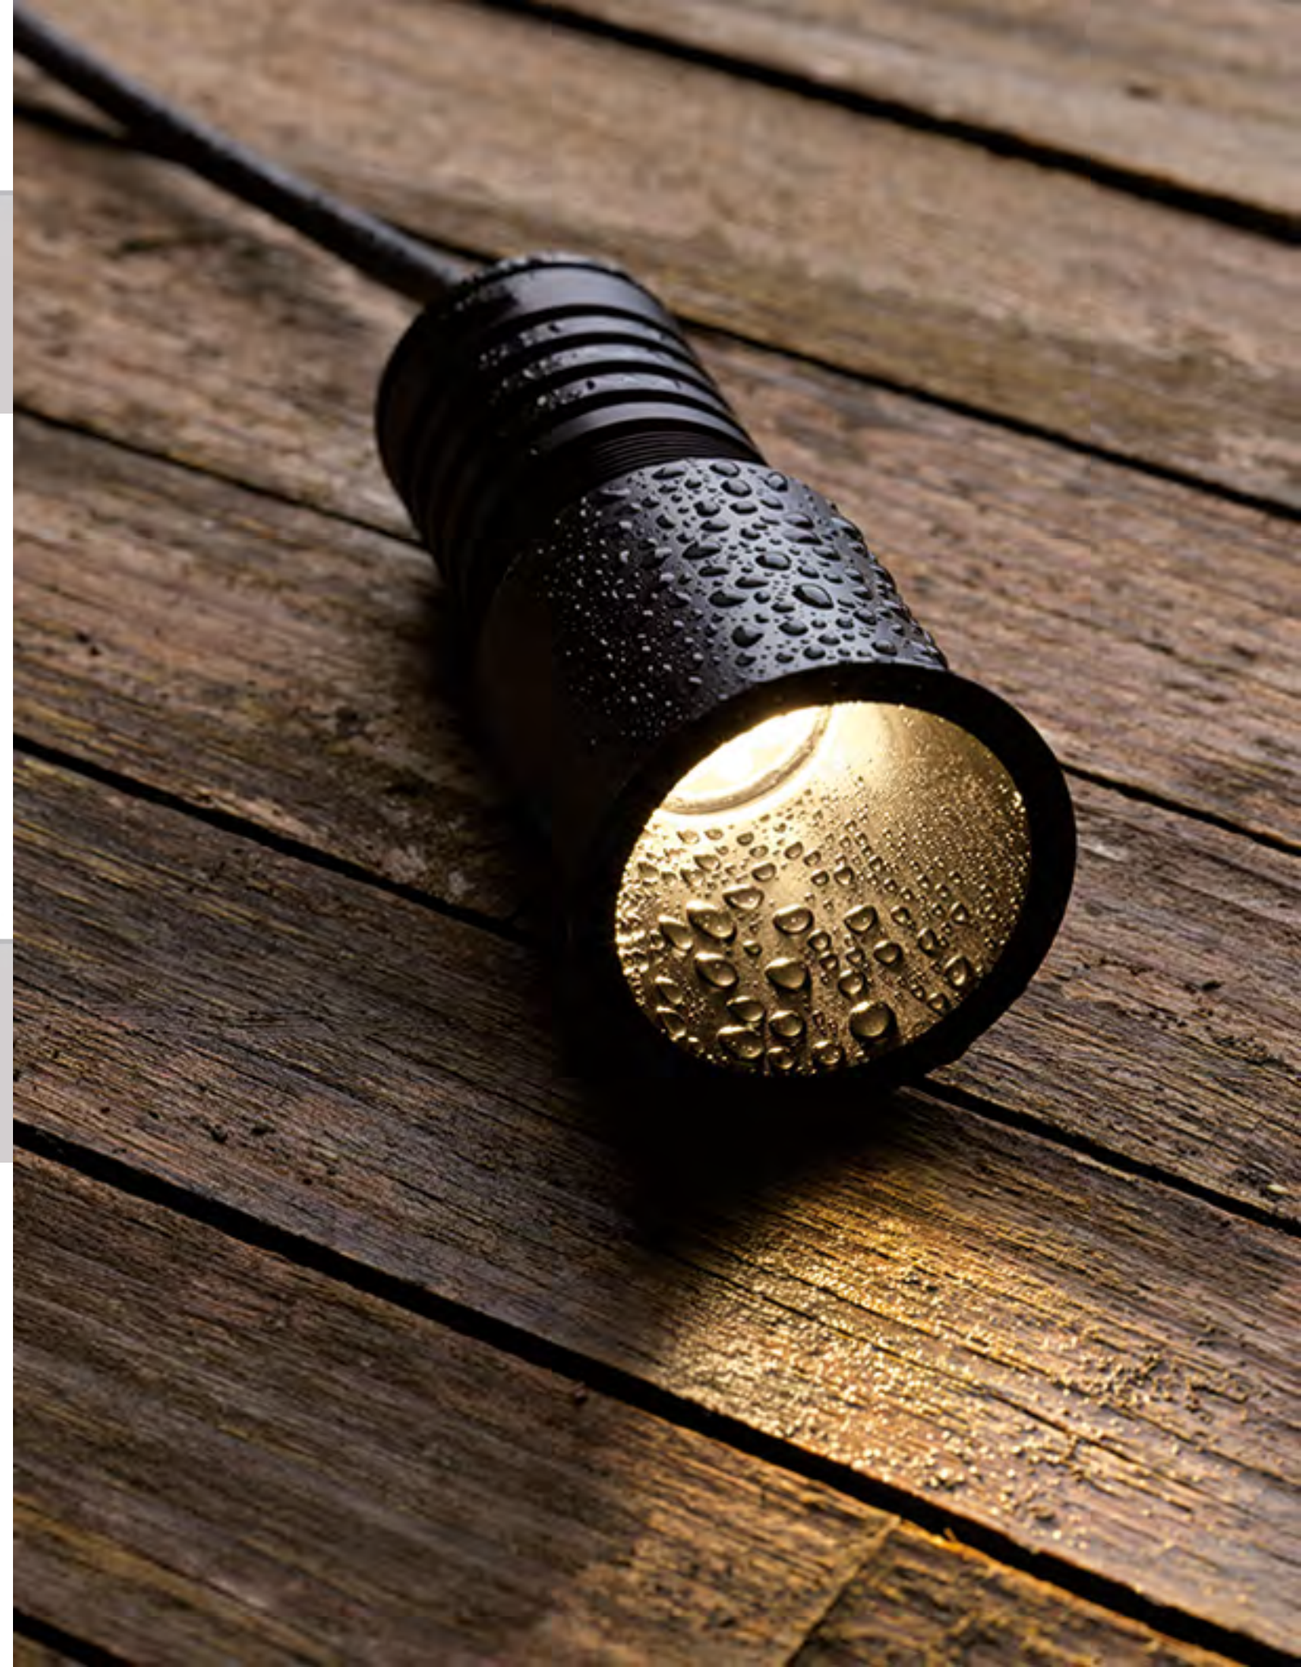


IP RATED DOWNLIGHTS

ZERUS 2

design: Roberto Mantovani

IP67 **Class 2**






Trimless IP-rated downlight

1,5W · 500mA (V_f 2,9V) · Series wiring

CRI90 · 3-Step MacAdam

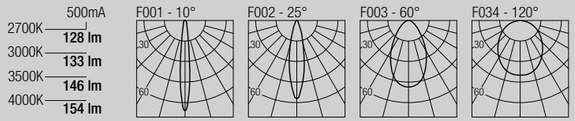

Code Construction

ZT1 X X X

- **1** White
- **5** Black
- **C** Custom


- **27** 2700K
- **30** 3000K
- **35** 3500K
- **40** 4000K

- **0** 10°
- **1** 20°
- **2** 40°
- **9** 120°

Accessories

AT086RO2051
Airtight recessed housing for insulated ceiling


IC086RO2051
Recessed housing for insulated ceiling



MP-R051
Baseplate



RO1051
T-bar baseplate



ZQT00U White
Plasterboard recessing frame



ZQT00U.BMK-WH White
ZQT00U.BMK-BLK Black
ZQT00U.BMK-CU Custom
Backmount frame for hard surfaces



LH01
Low luminance hex louvre

500mA Drivers


CCPR010A-500 (1..6) IP20
Dimming: PHASE - 0-10V


CCPR040A-500 (1..18) IP20
Dimming: PHASE - 0-10V

ZERUS 6

design: Roberto Mantovani

IP67 **Class 2**

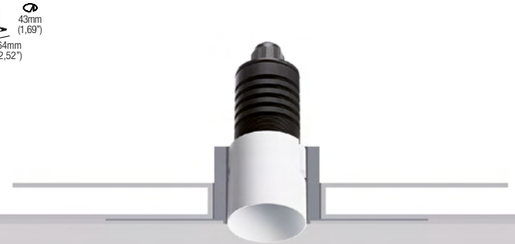




Trimless IP-rated downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring

Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

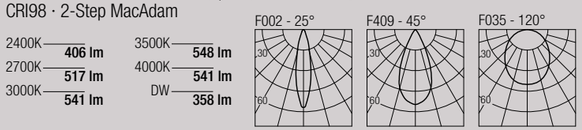

Code Construction

ZTE X X X

- **B** White
- **N** Black
- **Z** INOX AISI 316L
- **C** Custom


- **24** 2400K
- **27** 2700K
- **30** 3000K
- **35** 3500K
- **40** 4000K
- **DW** Dim to Warm

- **S** 25°
- **M** 45°
- **W** 120°

Accessories

AT086RO2051
Airtight recessed housing for insulated ceiling


IC086RO2051
Recessed housing for insulated ceiling




MP-R051
Baseplate




RO1051
T-bar baseplate



ZQT00U White
Plasterboard recessing frame



ZQT00U.BMK-WH White
ZQT00U.BMK-BLK Black
ZQT00U.BMK-CU Custom
Backmount frame for hard surfaces



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPR010A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

ZERUS 10

design: Roberto Mantovani

IP67 **Class 2**






Trimless IP-rated downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring

Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**728 lm**	3500K	**1130 lm**
2700K	**1064 lm**	4000K	**1114 lm**
3000K	**1116 lm**	DW	**630 lm**



Code Construction


ZN1 X 9 X X

- **S** 36° · **M** 46° · **W** 60° · **X** 120°
- **1** White · **5** Black · **C** Custom
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm

Accessories

AT086RO2070
Airtight recessed housing for insulated ceiling


IC086RO2070
Recessed housing for insulated ceiling



MP-R070
Baseplate




RO2070
T-bar baseplate



ZTC10U White
Plasterboard recessing frame



ZTC10U.BMK-WH White
ZTC10U.BMK-BLK Black
ZTC10U.BMK-CU Custom
Backmount frame for hard surfaces



L0D1
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V


CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V


FLY 6

design: Rod&Todd

50 mm
1,97"

IP67 **Class 2**

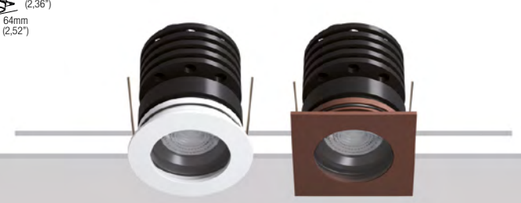




Flush optic IP-rated downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring

Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**434 lm**	3500K	**586 lm**
2700K	**553 lm**	4000K	**579 lm**
3000K	**579 lm**	DW	**383 lm**

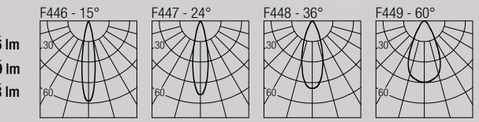

Code Construction


FLY6 X X X X

- **N** 15° · **S** 24° · **M** 36° · **W** 60° · **X** 120°
- **B** White · **N** Black · **Z** INOX AISI 316L · **C** Custom
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** Round · **2** Square

Accessories

AT064RO1051
Airtight recessed housing for insulated ceiling


IC064RO1051
Recessed housing for insulated ceiling



MP-R051
Baseplate



RO1051
T-bar baseplate



CSDS10
Recessing box



LH03
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPR010A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V


IP-RATED DOWNLIGHTS

FLY 10

design: Rod&Todd

60 mm 2,36" IP67 Class 2

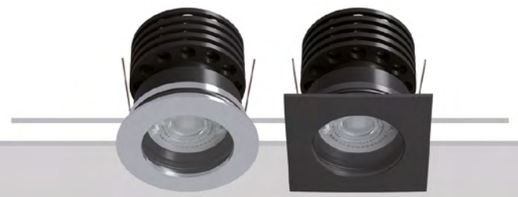




Flush optic IP-rated downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	770 lm	3500K	1195 lm
2700K	1125 lm	4000K	1178 lm
3000K	1180 lm	DW	667 lm



Code Construction


FLY1 X X 9 X X

- X: **N** 15° · **S** 24° · **M** 36° · **W** 60° · **X** 120°
- X: **B** White · **N** Black · **Z** INOX AISI 316L · **C** Custom
- X: **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- X: **1** Round · **2** Square

Accessories

AT064RO1060
Airtight recessed housing for insulated ceiling


IC064RO1060
Recessed housing for insulated ceiling




MP-R060
Baseplate



RO1060
T-bar baseplate



CSXJ01
Recessing box



LH04
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V


CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

ALPHA 10

design: Roberto Mantovani

60 mm 2,36" IP67 Class 2






Flush optic IP-rated downlight

9W · 500mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	728 lm
2700K	1064 lm
3000K	1116 lm
3500K	1130 lm
4000K	1114 lm



Code Construction


AP2 X X X 9 1

- 1: Beam angle 10°
- X: **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- X: **B** White · **N** Black · **Z** INOX AISI 316L · **C** Custom
- X: **1** Round · **2** Square

Accessories

AT086RO2060
Airtight recessed housing for insulated ceiling


IC086RO2060
Recessed housing for insulated ceiling




MP-R060
Baseplate



RO2060
T-bar baseplate



CSXJ01
Recessing box



500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V


IP RATED DOWNLIGHTS

JUPITER

design: Roberto Mantovani

50 mm 1,97" **IP67** **Class 2**






Flush optic IP-rated downlight

7,5W · 24VDC · Parallel wiring
CRI98 · 2-Step MacAdam

2400K	**487 lm**
2700K	**655 lm**
3000K	**688 lm**
3500K	**697 lm**
4000K	**686 lm**



Code Construction


JP1 X X X 9 X

- **S** 36° · **M** 46° · **W** 60° · **X** 120°
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **B** White · **N** Black · **Z** INOX AISI 316L · **C** Custom
- **1** Round · **2** Square

Accessories

AT064R01051
Airtight recessed housing for insulated ceiling


IC064R01051
Recessed housing for insulated ceiling




MP-R051
Baseplate



R01051
T-bar baseplate



CSDS10
Recessing box



L0D1
Low luminance hex louvre

24VDC Drivers

DLM.30 (1..3) IP20
Dimming: PHASE - 0-10V

DLM.60 (1..7) IP20
Dimming: PHASE - 0-10V


DLM.100 (1..12) IP20
Dimming: PHASE - 0-10V



VENUS

design: Roberto Mantovani


50 mm 1,97" **IP67** **Class 2**



Recessed optic IP-rated downlight

7,5W · 24VDC · Parallel wiring
CRI98 · 2-Step MacAdam

2400K	**487 lm**
2700K	**504 lm**
3000K	**530 lm**
3500K	**543 lm**
4000K	**556 lm**



Code Construction


VN1 X 9 X X

- **S** 36° · **M** 46° · **W** 60° · **X** 120°
- **B** White · **N** Black · **C** Custom
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K

Accessories

AT086R02051
Airtight recessed housing for insulated ceiling


IC086R02051
Recessed housing for insulated ceiling



MP-R051
Baseplate



R02051
T-bar baseplate



CSBT10
Recessing box



L0D1
Low luminance hex louvre

24VDC Drivers

DLM.30 (1..3) IP20
Dimming: PHASE - 0-10V

DLM.60 (1..7) IP20
Dimming: PHASE - 0-10V

DLM.100 (1..12) IP20
Dimming: PHASE - 0-10V



FLEXALIGHTING


IP RATED DOWNLIGHTS

ERIS

design: Roberto Mantovani

IP67 **Class 2**






Trimless IP-rated downlight

7,5W · 24VDC · Parallel wiring
CRI98 · 2-Step MacAdam

2400K	**487 lm**
2700K	**504 lm**
3000K	**530 lm**
3500K	**543 lm**
4000K	**556 lm**



Code Construction

ER1 X 9 X X


S	**M**	**W**	**X**
36°	46°	60°	120°

B	**N**	**C**
White	Black	Custom

24	**27**	**30**	**35**	**40**
2400K	2700K	3000K	3500K	4000K

Accessories

AT086RO2070
Airtight recessed housing for insulated ceiling




IC086RO2070
Recessed housing for insulated ceiling

MP-R070
Baseplate




RO2070
T-bar baseplate



ZTC10U White
Plasterboard recessing frame



ZTC10U.BMK-WH White
ZTC10U.BMK-BLK Black
ZTC10U.BMK-CU Custom
Backmount frame for hard surfaces



L0D1
Low luminance hex louvre

24VDC Drivers

DLM.30 (1..3) IP20
Dimming: PHASE - 0-10V

DLM.60 (1..7) IP20
Dimming: PHASE - 0-10V

DLM.100 (1..12) IP20
Dimming: PHASE - 0-10V


WOTAN 10

design: Lapo Grassellini

50 mm
1,97"

IP67 **Class 2**






Flush optic IP-rated downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**728 lm**	3500K	**1130 lm**
2700K	**1064 lm**	4000K	**1114 lm**
3000K	**1116 lm**	DW	**630 lm**



Code Construction


WT1 X X 9 X X

S	**M**	**W**	**X**	
36°	46°	60°	120°	
B	**N**	**Z**	**C**	
White	Black	INOX AISI 316L	Custom	
24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm

1	**2**
Round	Square

Accessories

AT064RO1051
Airtight recessed housing for insulated ceiling




IC064RO1051
Recessed housing for insulated ceiling

MP-R051
Baseplate



RO1051
T-bar baseplate



CSDS10
Recessing box



L0D1
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V


FLEXALIGHTING

WOTAN 20

design: Lapo Grassellini

90 mm 3,54" **IP67** **Class 2**






Flush optic IP-rated downlight

18W · 500mA (V$_f$ 36V)

CRI98 · 2-Step MacAdam

2700K	**1659 lm**
3000K	**1752 lm**
3500K	**1873 lm**
4000K	**1924 lm**

F901 - 23° F902 - 35° F903 - 52° F904 - 120°



Code Construction

WT2 X 9 X X

S	**M**	**W**	**X**
23°	35°	52°	120°


B	**N**	**Z**	**C**
White	Black	INOX AISI 316L	Custom

27	**30**	**35**	**40**
2700K	3000K	3500K	4000K

Accessories

AT086RO2090
Airtight recessed housing for insulated ceiling


IC086RO2090
Recessed housing for insulated ceiling



MP-R090
Baseplate



RO2090
T-bar baseplate



CSDS20
Recessing box



LWT201
Low luminance hex louvre

500mA Drivers


CCPR040A-500 (1) IP20
Dimming: PHASE - 0-10V

SLOT 6

design: Roberto Mantovani

60 mm 2,36° **IP67** **Class 2**





Adjustable IP-rated downlight


Static White: 4,5W · 500mA (V$_f$ 9V) · Series wiring

Dim to Warm: 4,5W · 250mA (V$_f$ 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**

F002 - 25° F409 - 45° F035 - 120°



Code Construction

SL6 X X X E

S	**M**	**W**
25°	45°	120°


24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm

B	**N**	**Z**	**C**
White	Black	INOX AISI 316L	Custom

Accessories

AT064R01060
Airtight recessed housing for insulated ceiling


IC064R01060
Recessed housing for insulated ceiling




MP-R060
Baseplate



R01060
T-bar baseplate



CSXJ01
Recessing box



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPR010A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V


IP RATED DOWNLIGHTS

SLOT 10

design: Roberto Mantovani

75 mm 2,95" **IP67** **Class 2**






Adjustable IP-rated downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring

Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**728 lm**	3500K	**1130 lm**
2700K	**1064 lm**	4000K	**1114 lm**
3000K	**1116 lm**	DW	**630 lm**



Code Construction

SL1 X X 9 X

S	M	W	X
36°	46°	60°	120°


24	27	30	35	40	DW
2400K	2700K	3000K	3500K	4000K	Dim to Warm

B	N	Z	C
White	Black	INOX AISI 316L	Custom

Accessories

AT086RO2075
Airtight recessed housing for insulated ceiling


IC086RO2075
Recessed housing for insulated ceiling



MP-R075
Baseplate



RO2075
T-bar baseplate



CSSL01
Recessing box



L0D1
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V


CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

TYRONE 6

design: Roberto Mantovani

60 mm 2,36" **IP67** **Class 2**






Adjustable IP-rated downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring

Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction

TR6 X X X E

S	M	W
25°	45°	120°


24	27	30	35	40	DW
2400K	2700K	3000K	3500K	4000K	Dim to Warm

B	N	Z	C
White	Black	INOX AISI 316L	Custom

Accessories

AT086RO2060
Airtight recessed housing for insulated ceiling


IC086RO2060
Recessed housing for insulated ceiling




MP-R060
Baseplate



RO2060
T-bar baseplate



CSXJ01
Recessing box



L0H1
Low luminance hex louvre

Static White - 500mA Drivers


CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPR010A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

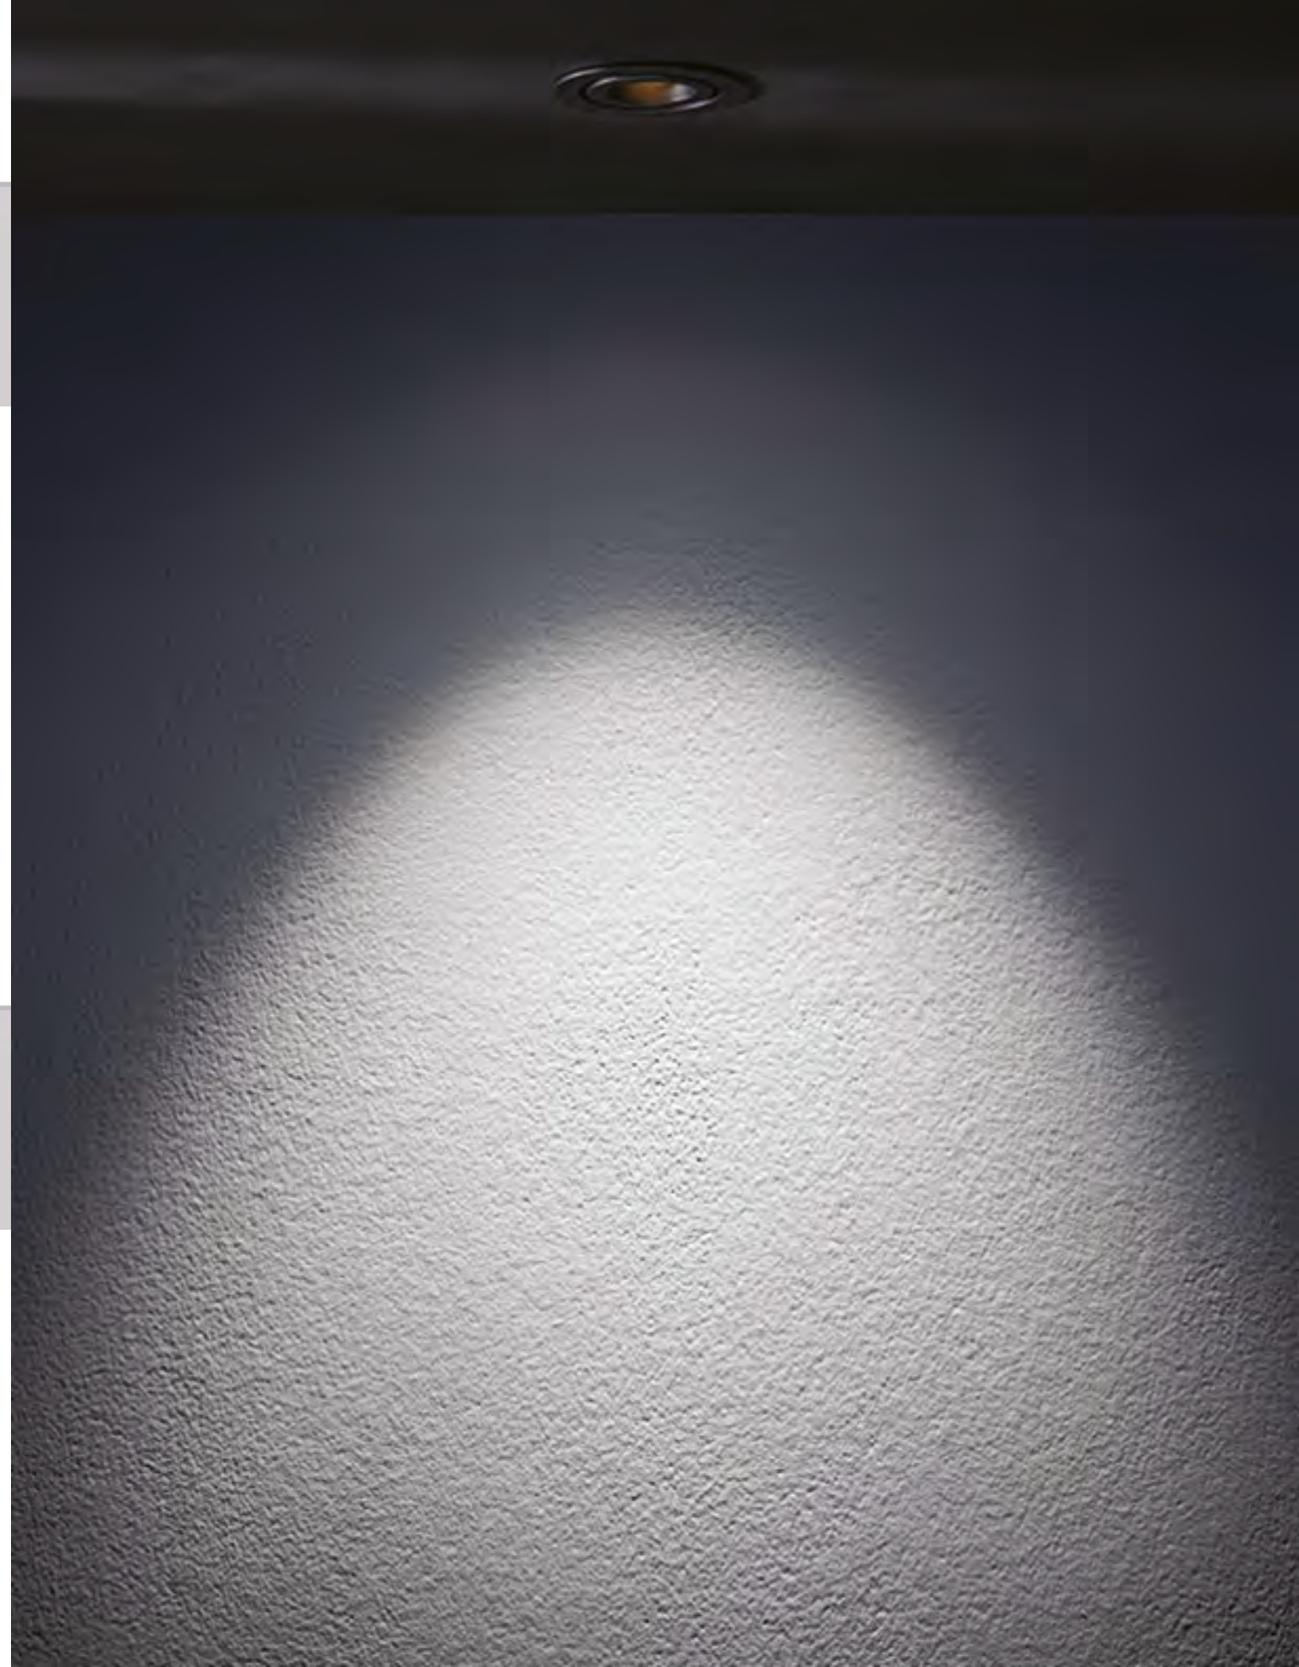


IP RATED DOWNLIGHTS

TYRONE 10

design: Roberto Mantovani

75 mm 2,95" **IP67** **Class 2**






Adjustable IP-rated downlight

Static White: 9W · 500mA (V_f 18V) · Series wiring

Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**728 lm**	3500K	**1130 lm**
2700K	**1064 lm**	4000K	**1114 lm**
3000K	**1116 lm**	DW	**630 lm**



Code Construction

TR1 X X 9 X


- **S** 36°
- **M** 46°
- **W** 60°
- **X** 120°

- **24** 2400K
- **27** 2700K
- **30** 3000K
- **35** 3500K
- **40** 4000K
- **DW** Dim to Warm

- **B** White
- **N** Black
- **Z** INOX AISI 316L
- **C** Custom

Accessories

AT086RO2075
Airtight recessed housing for insulated ceiling




IC086RO2075
Recessed housing for insulated ceiling

MP-R075
Baseplate



RO2075
T-bar baseplate



CSSL01
Recessing box



LOD1
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V


CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V


UPLIGHTS & PATHLIGHTS

TYLA

design: Roberto Mantovani


IP67 **Class 2**





Uplight

1W · 350mA (V_f 2,9V) · Series wiring
CRI90 · 3-Step MacAdam

		F701 - 20°	F702 - 40°	F734 - 120°
2700K	**81 lm**			
3000K	**81 lm**			
3500K	**100 lm**			
4000K	**107 lm**			


Code Construction

TY X X X X


- **N** Black · **Z** INOX AISI 316L · **C** Custom
- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **1** 20° · **2** 40° · **9** 120°
- **1** Round · **2** Square

Accessories

CSTY01
Recessing box



CSTY01.CP
Concrete pour housing for ingrade



350mA Drivers


CCPRO10A-350 (1..9) IP20
Dimming: PHASE - 0-10V


CCPRO40A-350 (1..18) IP20
Dimming: PHASE - 0-10V

FATBOY 2

design: Roberto Mantovani




IP67 **Class 2** INOX IK10 IK09

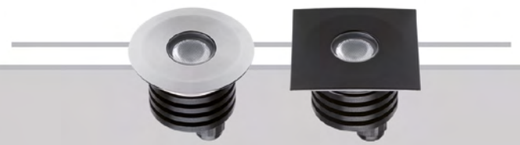



Uplight

1,5W · 500mA (V_f 2,9V) · Series wiring
CRI90 · 3-Step MacAdam

	500mA	F001 - 10°	F002 - 25°	F003 - 60°	F034 - 120°
2700K	**128 lm**				
3000K	**133 lm**				
3500K	**146 lm**				
4000K	**154 lm**				


Code Construction

FB1 X X X X


- **N** Black · **Z** INOX AISI 316L · **C** Custom
- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **0** 10° · **1** 20° · **2** 40° · **9** 120°
- **1** Round · **2** Square

Accessories

CSFB01
Recessing box



CSFB01.CP
Concrete pour housing for ingrade



500mA Drivers

CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V


BACK

TERA 2

design: Roberto Mantovani

IP67 **Class 2** INOX IK10 IK09






Uplight

1,5W · 500mA (V_f 2,9V) · Series wiring

CRI90 · 3-Step MacAdam

500mA	
2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**




Code Construction

XT1 X X X X


- **N** Black · **Z** INOX AISI 316L · **C** Custom
- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K
- **0** 10° · **1** 20° · **2** 40° · **9** 120°
- **1** Round · **2** Square

Accessories

CSXT01
Recessing box



CSXT01.CP
Concrete pour housing for ingrade



LH01
Low luminance hex louvre

500mA Drivers

CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V


CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V




TERA 6

design: Roberto Mantovani

IP67 **Class 2** INOX IK10 IK09

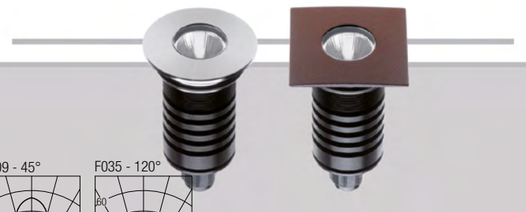




Uplight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring

Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**




Code Construction

XT2 X X X X E


- **N** Black · **Z** INOX AISI 316L · **C** Custom
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** 25° · **2** 45° · **3** 120°
- **1** Round · **2** Square

Accessories

CSXT01
Recessing box



CSXT01.CP
Concrete pour housing for ingrade



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V





BACK

DIG 6

design: Rod&Todd

IP67 **Class 2** INOX IK10 IK09

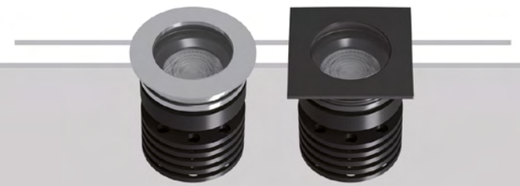




Uplight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**434 lm**
2700K	**553 lm**
3000K	**579 lm**
3500K	**586 lm**
4000K	**579 lm**
DW	**383 lm**

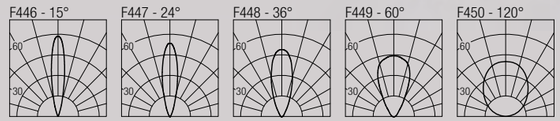


Code Construction

DIG6 X X X X


- 4th X: **N** 15° · **S** 24° · **M** 36° · **W** 60° · **X** 120°
- 3rd X: **N** Black · **Z** INOX AISI 316L · **C** Custom
- 2nd X: **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- 1st X: **1** Round · **2** Square

Accessories

CSDS10
Recessing box



CSDS10.CP
Concrete pour housing for ingrade



L0H3
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers


CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

DIG 10

design: Rod&Todd

IP67 **Class 2** INOX IK10 IK09

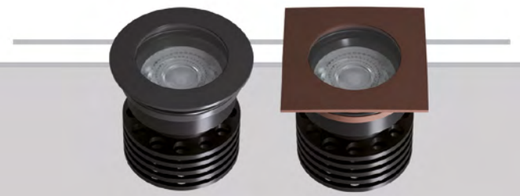




Uplight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**770 lm**
2700K	**1125 lm**
3000K	**1180 lm**
3500K	**1195 lm**
4000K	**1178 lm**
DW	**667 lm**

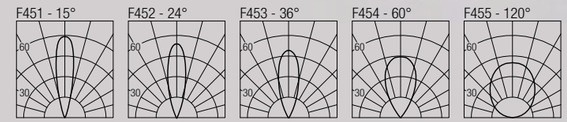


Code Construction

DIG1 X X 9 X X


- 5th X: **N** 15° · **S** 24° · **M** 36° · **W** 60° · **X** 120°
- 4th X: **N** Black · **Z** INOX AISI 316L · **C** Custom
- 3rd X: **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- 2nd X: **1** Round · **2** Square

Accessories

CSXJ01
Recessing box



CSXJ01.CP
Concrete pour housing for ingrade



L0H4
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V


CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

GLASS 6

design: Roberto Mantovani

IP67 **Class 2**






Uplight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**



Code Construction

GS6 X X

24	**27**	**30**	**35**	**40**	**DW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	

1	**2**
25°	45°

Accessories

CSGS01
Recessing box



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers


CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

GLASS 10

design: Roberto Mantovani

IP67 **Class 2**

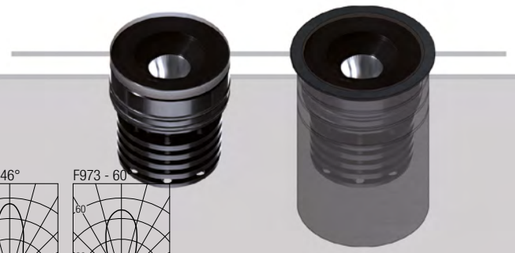




Uplight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**728 lm**	3500K	**1130 lm**
2700K	**1064 lm**	4000K	**1114 lm**
3000K	**1116 lm**	DW	**630 lm**



Code Construction

GS1 X X

24	**27**	**30**	**35**	**40**	**DW**	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	

S	**M**	**W**
36°	46°	60°

Accessories

CSGS07
Recessing box



LH01
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V


UPLIGHTS & PATHLIGHTS

JAN 10

design: Roberto Mantovani

IP67 **Class 2** INOX IK10 IK09






Uplight

9W · 500mA (V$_f$ 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**619 lm**
2700K	**904 lm**
3000K	**949 lm**
3500K	**961 lm**
4000K	**947 lm**

F001 - 10°



Code Construction

JN2 X X X 9 1

Beam angle 10°


24 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm

N Black · **Z** INOX AISI 316L · **C** Custom


1 Round · **2** Square

Accessories

CSXJ01
Recessing box



CSXJ01.CP
Concrete pour housing for ingrade



500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V


CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V




BREE

design: Roberto Mantovani

IP67 **Class 2** INOX IK10 IK09

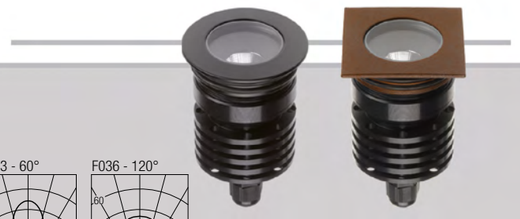




Uplight

7,5W · 24VDC · Parallel wiring

CRI98 · 2-Step MacAdam

2400K	**487 lm**
2700K	**655 lm**
3000K	**688 lm**
3500K	**697 lm**
4000K	**686 lm**

F971 - 36° F972 - 46° F973 - 60° F036 - 120°



Code Construction

BR1 X X X 9 X

S 36° · **M** 46° · **W** 60° · **X** 120°

N Black · **Z** INOX AISI 316L · **C** Custom

24 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K


1 Round · **2** Square

Accessories

CSDS10
Recessing box



CSDS10.CP
Concrete pour housing for ingrade



L0D1
Low luminance hex louvre

24VDC Drivers

DLM.30 (1..3) IP20
Dimming: PHASE - 0-10V

DLM.60 (1..7) IP20
Dimming: PHASE - 0-10V

DLM.100 (1..12) IP20
Dimming: PHASE - 0-10V





UPLIGHTS & PATHLIGHTS

DESERT 10

design: Lapo Grassellini

IP67 Class 2 INOX IK10 IK09

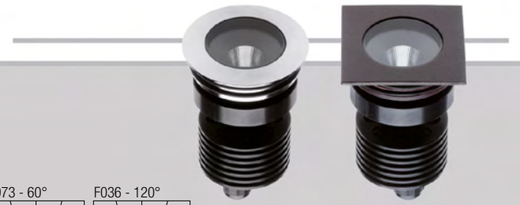




Uplight

Static White: 9W · 500mA (V_f 18V) · Series wiring

Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**728 lm**
2700K	**1064 lm**
3000K	**1116 lm**
3500K	**1130 lm**
4000K	**1114 lm**
DW	**630 lm**




Code Construction

DS1 X X 9 X X


- **S** 36° · **M** 46° · **W** 60° · **X** 120°
- **N** Black · **Z** INOX AISI 316L · **C** Custom
- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **1** Round · **2** Square

Accessories

CSDS10
Recessing box



CSDS10.CP
Concrete pour housing for ingrade



L0D1
Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V


CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

DESERT 20

design: Lapo Grassellini

IP67 Class 2 INOX IK10 IK09






Uplight

18W · 500mA (V_f 36V)

CRI98 · 2-Step MacAdam

2700K	**1659 lm**
3000K	**1752 lm**
3500K	**1873 lm**
4000K	**1924 lm**

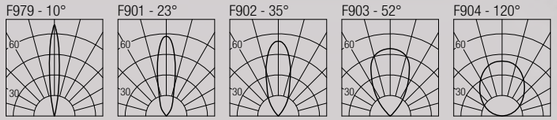

Code Construction

DS21 X 9 X X


- **XS** 10° · **S** 23° · **M** 35° · **W** 52° · **X** 120°
- **N** Black · **Z** INOX AISI 316L · **C** Custom
- **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K

Accessories

CSDS20
Recessing box



CSDS20.CP
Concrete pour housing for ingrade



LWT201
Low luminance hex louvre

500mA Drivers


CCPRO40A-500 (1) IP20
Dimming: PHASE - 0-10V


UPLIGHTS & PATHLIGHTS

NEXUS 6

design: Rod&Todd

IP67 **Class 2** INOX IK10 IK09






Adjustable uplight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring

Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**434 lm**
2700K	**553 lm**
3000K	**579 lm**
3500K	**586 lm**
4000K	**579 lm**
DW	**383 lm**



Code Construction

NEX6 X X X


24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm

N	**S**	**M**	**W**
15°	24°	36°	60°


N	**Z**	**C**
Black	INOX AISI 316L	Custom

Accessories

CSXJ01
Recessing box



CSXJ01.CP
Concrete pour housing for ingrade



LH03
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPR010A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

NEXUS 10

design: Rod&Todd

IP67 **Class 2** INOX IK10 IK09






Adjustable uplight

Static White: 9W · 500mA (V_f 18V) · Series wiring

Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring

CRI98 · 2-Step MacAdam

2400K	**770 lm**
2700K	**1125 lm**
3000K	**1180 lm**
3500K	**1195 lm**
4000K	**1178 lm**
DW	**667 lm**



Code Construction

NEX10 X X X


24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm

N	**S**	**M**	**W**
15°	24°	36°	60°


N	**Z**	**C**
Black	INOX AISI 316L	Custom

Accessories

CSXJ02
Recessing box



CSXJ02.CP
Concrete pour housing for ingrade



LH04
Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V


UPLIGHTS & PATHLIGHTS

MAL 10

design: Lapo Grassellini

IP67 **Class 2** INOX IK10 IK09





Uplight

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**728 lm**	3500K	**1130 lm**
2700K	**1064 lm**	4000K	**1114 lm**
3000K	**1116 lm**	DW	**630 lm**

F984 - WALL WASHER



Code Construction

MA1 X 9 X

N	**Z**	**C**
Black	INOX AISI 316L	Custom


24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm

Accessories

CSDS20
Recessing box



CSDS20.CP
Concrete pour housing for ingrade



Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V


CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

MAL 20

design: Lapo Grassellini

IP67 **Class 2** INOX IK10 IK09





Uplight

18W · 500mA (V_f 36V)
CRI98 · 2-Step MacAdam

2700K	**1659 lm**
3000K	**1752 lm**
3500K	**1873 lm**
4000K	**1924 lm**

F984 - WALL WASHER



Code Construction

MA2 X 9 X

N	**Z**	**C**
Black	INOX AISI 316L	Custom


27	**30**	**35**	**40**
2700K	3000K	3500K	4000K

Accessories

CSDS20
Recessing box



CSDS20.CP
Concrete pour housing for ingrade



500mA Drivers

CCPR040A-500 (1) IP20
Dimming: PHASE - 0-10V



UPLIGHTS & PATHLIGHTS

BUNGA

design: Roberto Mantovani

IP67 **Class 2** INOX IK10 IK09



Pathlight

1,5W · 500mA (V_f 2,9V) · Series wiring

CRI90 · 3-Step MacAdam

	500mA
2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**

Code Construction

BG X X X


- 1 — Single emission
- 2 — Double emission

X:
- **27** — 2700K
- **30** — 3000K
- **35** — 3500K
- **40** — 4000K

X:
- **N** — Black
- **Z** — INOX AISI 316L
- **C** — Custom


Accessories

CSXT01
Recessing box



CSXT01.CP
Concrete pour housing for ingrade

CXTY01.CPW
Concrete pour housing for wall



500mA Drivers

CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V

MINIAIR

design: Roberto Mantovani

IP67 **Class 2** INOX IK10 IK09



Pathlight

1,5W · 500mA (V_f 2,9V) · Series wiring

CRI90 · 3-Step MacAdam

	500mA
2700K	**128 lm**
3000K	**133 lm**
3500K	**146 lm**
4000K	**154 lm**

Code Construction

MXR X X X


- 1 — Single emission
- 2 — Double emission

X:
- **27** — 2700K
- **30** — 3000K
- **35** — 3500K
- **40** — 4000K


X:
- **N** — Black
- **Z** — INOX AISI 316L
- **C** — Custom

Accessories

CSXT01
Recessing box



CSXT01.CP
Concrete pour housing for ingrade



500mA Drivers

CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V


UPLIGHTS & PATHLIGHTS

AIR 6

design: Roberto Mantovani

IP67 **Class 2** INOX IK10 IK09





Pathlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**


Code Construction

XR2 X X X


- **24** 2400K · **27** 2700K · **30** 3000K · **35** 3500K · **40** 4000K · **DW** Dim to Warm
- **N** Black · **Z** INOX AISI 316L · **C** Custom
- **1** Single emission · **2** Double emission

Accessories

CSXT01
Recessing box



CSXT01.CP
Concrete pour housing for ingrade



Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V



IP-RATED PROJECTORS

YAGA


design: Roberto Mantovani

IP65 **Class 2**




IP-rated projector

1W · 350mA (V_f 2,9V) · Series wiring
CRI90 · 3-Step MacAdam



2700K — **81 lm**
3000K — **81 lm**
3500K — **100 lm**
4000K — **107 lm**




Code Construction

YG1 X X X

S	**M**	**W**	
20°	40°	120°	
27	**30**	**35**	**40**
2700K	3000K	3500K	4000K
2	**5**	**6**	**C**
Aluminium	Black	Bronze	Custom

Accessories

XP00MY
Earth spike



XNTY02 Aluminium - Alluminio
XNTY05 Black - Nero
XNTY06 Bronze - Bronzo
Antiglare snoot



XXT02
Tree strap



350mA Drivers

CCPRO10A-350 (1..9) IP20
Dimming: PHASE - 0-10V

CCPRO40A-350 (1..18) IP20
Dimming: PHASE - 0-10V

OLU 2


design: Roberto Mantovani

IP65 **Class 2**




IP-rated projector

1,5W · 500mA (V_f 2,9V) · Series wiring
CRI90 · 3-Step MacAdam



500mA
2700K — **128 lm**
3000K — **133 lm**
3500K — **146 lm**
4000K — **154 lm**

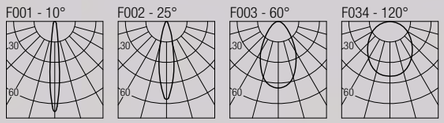


Code Construction

LU1 X X X

0	**1**	**2**	**9**
10°	20°	40°	120°
27	**30**	**35**	**40**
2700K	3000K	3500K	4000K
2	**5**	**6**	**C**
Aluminium	Black	Bronze	Custom

Accessories - Accessori

CP0022
Earth spike



LH01
Low luminance hex louvre

XNTC02 Aluminium
XNTC05 Black
XNTC06 Bronze
Antiglare snoot



XXT01
Tree strap



500mA Drivers

CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V




FLEXALIGHTING


BACK

OLU 6

design: Roberto Mantovani

IP65 **Class 2**






IP-rated projector

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**434 lm**	3500K	**586 lm**
2700K	**553 lm**	4000K	**579 lm**
3000K	**579 lm**	DW	**383 lm**




Code Construction

LU2 X X X

S	**M**	**W**			
25°	45°	120°			
24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm
2	**5**	**6**	**C**		
Aluminium	Black	Bronze	Custom		

CP0022
Earth spike



LH01
Low luminance hex louvre

XNTC02 Aluminium
XNTC05 Black
XNTC06 Bronze
Antiglare snoot

XXT01
Tree strap

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V


CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

MAUNA 6

design: Rod&Todd

IP65 **Class 2**






IP-rated projector

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**434 lm**	3500K	**586 lm**
2700K	**553 lm**	4000K	**579 lm**
3000K	**579 lm**	DW	**383 lm**

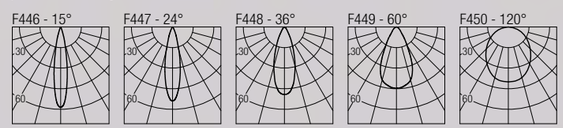


Code Construction

MU6 X X X

N	**S**	**M**	**W**	**X**	
15°	24°	36°	60°	120°	
24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm
2	**5**	**6**	**C**		
Aluminium	Black	Bronze	Custom		

Accessories

CP0022
Earth spike



LH03
Low luminance hex louvre

XNTM02 Aluminium
XNTM05 Black
XNTM06 Bronze
Antiglare snoot

XXT01
Tree strap

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V


BACK

MAUNA 10

design: Rod&Todd

IP65 Class 2






IP-rated projector

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**770 lm**	3500K	**1195 lm**
2700K	**1125 lm**	4000K	**1178 lm**
3000K	**1180 lm**	DW	**667 lm**




Code Construction

MU1 X X X

N	**S**	**M**	**W**	**X**	
15°	24°	36°	60°	120°	
24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm
2	**5**	**6**	**C**		
Aluminium	Black	Bronze	Custom		

Accessories

CP0022
Earth spike



LH04
Low luminance hex louvre

XNTX202 Aluminium
XNTX205 Black
XNTX206 Bronze
Antiglare snoot

XXT01
Tree strap

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V


CCPRO040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

MAHALO

design: Roberto Mantovani

IP65 Class 2






IP-rated projector

7,5W · 24VDC · Parallel wiring
CRI98 · 2-Step MacAdam

2400K	**487 lm**
2700K	**655 lm**
3000K	**688 lm**
3500K	**697 lm**
4000K	**686 lm**

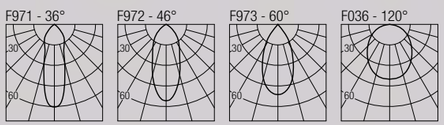


Code Construction

MH1 X X 9 X

S	**M**	**W**	**X**	
36°	46°	60°	120°	
24	**27**	**30**	**35**	**40**
2400K	2700K	3000K	3500K	4000K
2	**5**	**6**	**C**	
Aluminium	Black	Bronze	Custom	

Accessories - Accessori

CP0022
Earth spike



L0D1
Low luminance hex louvre

XNTX202 Aluminium
XNTX205 Black
XNTX206 Bronze
Antiglare snoot

XXT01
Tree strap

24VDC Drivers

DLM.30 (1..3) IP20
Dimming: PHASE - 0-10V

DLM.60 (1..7) IP20
Dimming: PHASE - 0-10V

DLM.100 (1..12) IP20
Dimming: PHASE - 0-10V


IP-RATED PROJECTORS

BRUTUS 10

design: Roberto Mantovani

IP65 **Class 2**






IP-rated projector

Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**735 lm**	3500K	**1139 lm**
2700K	**1072 lm**	4000K	**1121 lm**
3000K	**1124 lm**	DW	**634 lm**




Code Construction

BRT1 X X 9 X

S	**M**	**F**	**W**		
15°	24°	45°	120°		
24	**27**	**30**	**35**	**40**	**DW**
2400K	2700K	3000K	3500K	4000K	Dim to Warm
2	**5**	**6**	**C**		
Aluminium	Black	Bronze	Custom		

Accessories - Accessori

CP0022
Earth spike



LBRT101
Low luminance hex louvre

XNTB102 Aluminium
XNTB105 Black
XNTB106 Bronze
Antiglare snoot

XXT01
Tree strap

Static White - 500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPRO10A-400 (1) IP20
Dimming: PHASE - 0-10V


CCPRO40A-400 (1..3) IP20
Dimming: PHASE - 0-10V

BRUTUS 20

design: Roberto Mantovani

IP65 **Class 2**






IP-rated projector

18W · 500mA (V_f 36V)
CRI98 · 2-Step MacAdam

2700K	**1659 lm**
3000K	**1752 lm**
3500K	**1873 lm**
4000K	**1924 lm**




Code Construction

BRT2 X X 9 X

S	**M**	**F**	**W**	
15°	24°	45°	120°	
27	**30**	**35**	**40**	
2700K	3000K	3500K	4000K	
2	**5**	**6**	**C**	
Aluminium	Black	Bronze	Custom	

Accessories - Accessori

CP0022
Earth spike



LBRT201
Low luminance hex louvre

XNTB202 Aluminium
XNTB205 Black
XNTB206 Bronze
Antiglare snoot

XXT01
Tree strap


500mA Drivers

CCPRO40A-500 (1) IP20
Dimming: PHASE - 0-10V

VERTICAL SUPPORT FOR IP-RATED PROJECTORS


POLE

design: Roberto Mantovani

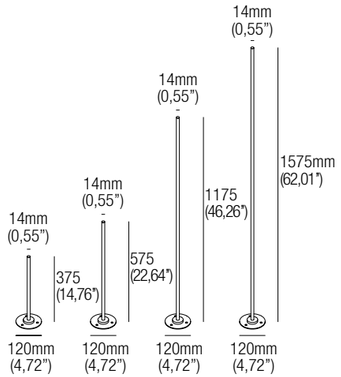


Vertical support for projectors.
The Pole system allows multiple luminaires to be distributed along the vertical support. Available in four heights, the luminaires installed can be directed to any direction, offering a ˜exible and dynamic installation solution.

Code Construction



Accessories - Accessori

ZCP001
Anchor bolt for concrete plinth






IP RATED PROJECTORS FOR POLE SYSTEM

OLU 6 POLE

design: Roberto Mantovani


IP65 **Class 2**



IP-rated projector for Pole system

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	**406 lm**	3500K	**548 lm**
2700K	**517 lm**	4000K	**541 lm**
3000K	**541 lm**	DW	**358 lm**





Code Construction

LUP2 X X X

S		**M**		**W**			
25°		45°		120°			
24	**27**	**30**	**35**	**40**	**DW**		
2400K	2700K	3000K	3500K	4000K	Dim to Warm		
5		**C**					
Black		Custom					

Accessories - Accessori

LH01
Low luminance hex louvre

XNTC05V Black
Antiglare snoot

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers


CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

MAHALO POLE

design: Roberto Mantovani


IP65 **Class 2**



IP-rated projector for Pole system

7,5W · 24VDC · Parallel wiring
CRI98 · 2-Step MacAdam

2400K	**487 lm**
2700K	**655 lm**
3000K	**688 lm**
3500K	**697 lm**
4000K	**686 lm**





Code Construction

MHP1 X X 9 X

S	**M**	**W**	**X**	
36°	46°	60°	120°	
24	**27**	**30**	**35**	**40**
2400K	2700K	3000K	3500K	4000K
5	**C**			
Black	Custom			

Accessories - Accessori

L0D1
Low luminance hex louvre

XNTX205V Black
Antiglare snoot

24VDC Drivers

DLM.30 (1..3) IP20
Dimming: PHASE - 0-10V

DLM.60 (1..7) IP20
Dimming: PHASE - 0-10V

DLM.100 (1..12) IP20
Dimming: PHASE - 0-10V


BOLLARDS

ELLE 2

design: Roberto Mantovani

IP65 **Class 2**



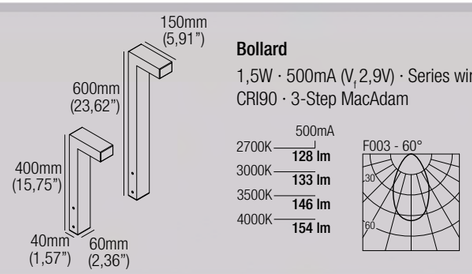

Bollard

1,5W · 500mA (V_f 2,9V) · Series wiring
CRI90 · 3-Step MacAdam

Code Construction

BLS X X X


1	5	C
White	Black	Custom

27	30	35	40
2700K	3000K	3500K	4000K


4	6
40cm (14.17")	60cm (23.62")

Accessories - Accessori

ZC001
Anchor bolt for concrete plinth
Zanca per plinto cementizio



CP0022
Earth spike



500mA Drivers

CCPRO10A-500 (1..6) IP20
Dimming: PHASE - 0-10V


CCPRO40A-500 (1..18) IP20
Dimming: PHASE - 0-10V

ELLE 6

design: Roberto Mantovani

IP65 **Class 2**



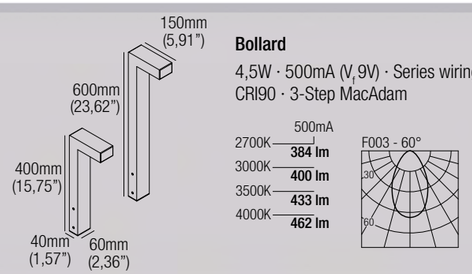

Bollard

4,5W · 500mA (V_f 9V) · Series wiring
CRI90 · 3-Step MacAdam

Code Construction

BLP X X X


1	5	C
White	Black	Custom

27	30	35	40
2700K	3000K	3500K	4000K


4	6
40cm (14.17")	60cm (23.62")

Accessories - Accessori

ZC001
Anchor bolt for concrete plinth
Zanca per plinto cementizio



CP0022
Earth spike



500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V







BOLLARDS

DUSK

design: Roberto Mantovani

IP65 **Class 2**

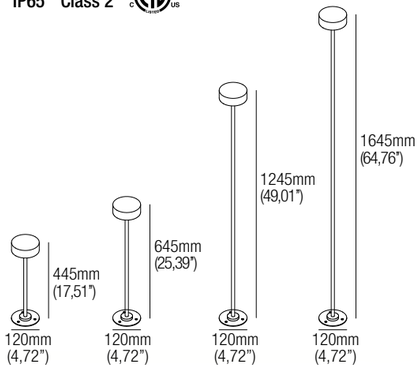

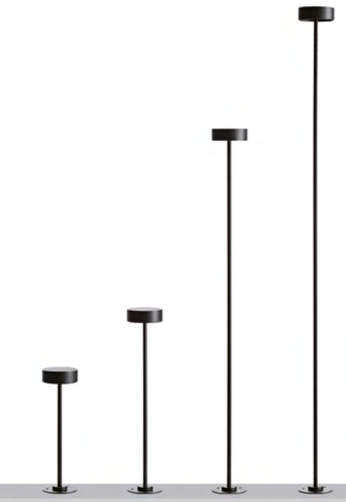

Bollard

8,2W · 24VDC · Parallel wiring
CRI85 · 2-Step MacAdam

2700K — **540 lm**
3000K — **560 lm**
4000K — **610 lm**

Code Construction

DU X X X


2 2700K · **3** 3000K · **4** 4000K

5 Black · **C** Custom

A	**B**	**C**	**D**
44.5cm (17.51")	64.5cm (25.39")	124.5cm (49.01")	164.5cm (64.76")

Accessories - Accessori

ZCP001
Anchor bolt for concrete plinth



24VDC Drivers

DLM.30 (1..3) IP20
Dimming: PHASE - 0-10V

DLM.60 (1..7) IP20
Dimming: PHASE - 0-10V

DLM.100 (1..12) IP20
Dimming: PHASE - 0-10V



BACK

Dimmable constant current power supplies

250 mA

CCPRO10A-250	Dimming type	Power	Input voltage	V out	Dimensions (mm)
IP20	PHASE 0-10V	10 W	100..277 VAC	3..42 VDC	230x127x30 (h) 33x152x38 (h) with BX enclosure
CCPRO40A-250	Dimming type	Power	Input voltage	V out	Dimensions (mm)
IP20	PHASE 0-10V	40 W	100..277 VAC	3..60 VDC	54x165x20 (h) 56x188x38 (h) with BX enclosure

350 mA

CCPRO10A-350	Dimming type	Power	Input voltage	V out	Dimensions (mm)
IP20	PHASE 0-10V	10 W	100..277 VAC	3..42 VDC	230x127x30 (h) 33x152x38 (h) with BX enclosure
CCPRO40A-350	Dimming type	Power	Input voltage	V out	Dimensions (mm)
IP20	PHASE 0-10V	40 W	100..277 VAC	3..60 VDC	54x165x20 (h) 56x188x38 (h) with BX enclosure

400 mA

CCPRO10A-400	Dimming type	Power	Input voltage	V out	Dimensions (mm)
IP20	PHASE 0-10V	10 W	100..277 VAC	3..42 VDC	230x127x30 (h) 33x152x38 (h) with BX enclosure
CCPRO40A-400	Dimming type	Power	Input voltage	V out	Dimensions (mm)
IP20	PHASE 0-10V	40 W	100..277 VAC	3..60 VDC	54x165x20 (h) 56x188x38 (h) with BX enclosure

500 mA

CCPRO10A-500	Dimming type	Power	Input voltage	V out	Dimensions (mm)
IP20	PHASE 0-10V	10 W	100..277 VAC	3..42 VDC	230x127x30 (h) 33x152x38 (h) with BX enclosure
CCPRO40A-500	Dimming type	Power	Input voltage	V out	Dimensions (mm)
IP20	PHASE 0-10V	40 W	100..277 VAC	3..60 VDC	54x165x20 (h) 56x188x38 (h) with BX enclosure

700 mA

CCPRO40A-700	Dimming type	Power	Input voltage	V out	Dimensions (mm)
IP20	PHASE 0-10V	40 W	100..277 VAC	3..60 VDC	54x165x20 (h) 56x188x38 (h) with BX enclosure

1050 mA

CCPRO40A-1050	Dimming type	Power	Input voltage	V out	Dimensions (mm)
IP20	PHASE 0-10V	40 W	100..277 VAC	3..60 VDC	54x165x20 (h) 56x188x38 (h) with BX enclosure

Programmable tunable white constant current power supplies

150..1400 mA

DL0561S1	Dimming type	Control channels	Power	Input voltage	V out	Dimensions (mm)
IP20	0-10V	2	50 W per channel	120..277 VAC	2..55 VDC	130x77x30 (h)

Dimmable constant voltage power supplies

24 VDC for use with low voltage track systems and DC voltage/current converters

CV2496A	Dimming type	Power	Input voltage	Dimensions (mm)
IP65	PHASE 0-10V	96 W	100..277 VAC	95x220x40 (h)

24 VDC

DLM.30	Dimming type	Power	Input voltage	Dimensions (mm)
IP20 NEMA4X	PHASE 0-10V	30 W	100..277 VAC	165x90x25 (h)
DLM.60	Dimming type	Power	Input voltage	Dimensions (mm)
IP20 NEMA4X	PHASE 0-10V	60 W	100..277 VAC	194x90x25 (h)
DLM.100	Dimming type	Power	Input voltage	Dimensions (mm)
IP20 NEMA4X	PHASE 0-10V	96 W	100..277 VAC	220x90x45 (h)

Programmable voltage/current converters

50..700 mA

DCVI.B.1	Dimming type	Power	V in	V out	I out	Dimensions (mm)
IP20	PHASE 0-10V	13 W	24 VDC constant voltage	3..27 VDC constant current	50..700 mA	19x92x18 (h)
DCVI.B.2	Dimming type	Power	V in	V out	I out	Dimensions (mm)
IP20	PHASE 0-10V	26 W	24 VDC constant voltage	28..42 VDC constant current	50..700 mA	19x92x18 (h)

IP X X

0 Unprotected

1 Protected from objects bigger than 50mm Ø

2 Protected from objects bigger than 12,5mm Ø

3 Protected from objects bigger than 2,5mm Ø

4 Protected from objects bigger than 1mm Ø

5 Protected against dust ingress, not harmful deposits

6 Completely protected against dust

IP X X

0 Unprotected

1 Protected against vertically falling water drops

2 Protected against vertically falling water drops when enclosure is tilted up to 15°

3 Protected against water sprayed at an angle up to 60° on either side of the vertical

4 Protected against water splashed against the component from any direction

5 Protected against water projected in jets from any direction

6 Protected against water projected in powerful jets from any direction

7 Protected against temporary immersion in water

8 Protected against continuous immersion in water

	IK00	IK01	IK02	IK03	IK04	IK05	IK06	IK07	IK08	IK09	IK10
Energy (J)	--	0,15	0,20	0,35	0,50	0,70	1,00	2,00	5,00	10,00	20,00
Mass and height of the piece	--	0,2 Kg 70mm	0,2 Kg 100mm	0,2 Kg 175mm	0,2 Kg 250mm	0,2 Kg 350mm	0,5 Kg 200mm	0,5 Kg 400mm	1,7 Kg 295mm	5 Kg 200mm	5 Kg 400mm

Wires section / Distances from drivers

150..1050 mA

Aluminum:

Distance	25 mt (82 ft)	37 mt (123 ft)	62 mt (205 ft)
Section	18 AWG	16 AWG	14 AWG

Copper:

Distance	37 mt (123 ft)	62 mt (205 ft)	87 mt (287 ft)
Section	18 AWG	16 AWG	14 AWG

24 VDC

Aluminum:

Distance	4 mt (13 ft)	6 mt (20 ft)	10 mt (33 ft)
Section	18 AWG	16 AWG	14 AWG

Copper:

Distance	6 mt (20 ft)	10 mt (33 ft)	17 mt (56 ft)
Section	18 AWG	16 AWG	14 AWG

FLEXALIGHTING

FLEXA LIGHTING
NORTH AMERICA

FLEXALIGHTING North America
Unit 22 - 15531
24th Avenue Surrey, BC.
Canada, V4A 2J4.
ph. 604.385.4311
www.˜ exalighting-na.com

PART OF
ĐEXELANCE