

FLEXA
LIGHTING
NORTH AMERICA

smart news
2025


FLUSH OPTIC DOWNLIGHTS



**ESME
PRECISION R10**
9W IP20




**ESME
PRECISION R20**
18W IP20



**ESME
PERFORMANCE R10**
9W IP20



**ESME
PERFORMANCE R20**
18W IP20



DIP 6
4,5W IP20



FLEXUS 20
18W IP20

RECESSED OPTIC DOWNLIGHTS



AIMEE 6
4,5W IP20




AIMEE 10
9W IP20



FRANNY 20
18W IP20

TRIMLESS DOWNLIGHTS




DIP 6 TRIMLESS
4,5W IP20



ZERO Q6
4,5W IP20



ZERO Q10
9W IP20



**AIMEE 6
TRIMLESS**
4,5W IP20



**AIMEE 10
TRIMLESS**
9W IP20



ZOE 20
18W IP20

TRIMLESS PROJECTORS



AIMEE T6
4,5W IP20



AIMEE T10
9W IP20

SEMI-RECESSED PROJECTORS



AIMEE R6
4,5W IP20



AIMEE R10
9W IP20

SURFACE PROJECTORS



AIMEE S6
4,5W IP20



AIMEE S10
9W IP20



WAND S1020
9/18W IP20

LOW VOLTAGE TRACK MODULES



AIMEE X6
4,5W IP20



AIMEE X10
9W IP20

CEILING & WALL MOUNTED



LINI S6
9W IP20



LINI W6
4,5/9W IP20

PENDANT



LINI P6
9W IP20



WAND P1020
9/18W IP20

TRIMLESS PENDANT



LINI PT6
9W IP67

IP-RATED DOWNLIGHTS



FLY 20
18W IP67



VEGA 6
4,5W IP67



VEGA 10
4,5W IP67



VEGA 20
18W IP67



ZIGGY 6
4,5W IP67



ZIGGY 10
9W IP67



ZIGGY 20
18W IP67

UPLIGHTS



DIG 20
18W IP67

IP-RATED PROJECTORS




RENE
9W IP67

ESME PRECISION R10


design: Jude Allen

285x25 mm
11,22x0,98" IP20 Class 2 



Flush optic downlight
9W · 24VDC · Parallel wiring
CRI95 · 3-Step MacAdam

2700K	946 lm
3000K	1005 lm
3500K	1081 lm
4000K	1157 lm

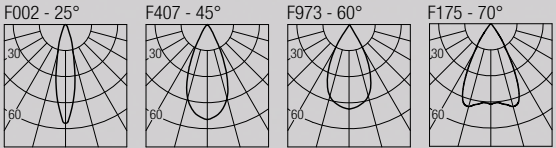

Code Construction




LSR10 X X X				
	27	30	35	40
	2700K	3000K	3500K	4000K
1	2	3	4	
25°	45°	60°	70°	(Batwing)
1	5			
White	Black			

Accessories

AT1264Q285025
Airtight recessed housing for insulated ceiling
IC1264Q285025
Recessed housing for insulated ceiling

MP-Q285025
Baseplate

Q285025
T-bar baseplate




24VDC Drivers

CV2496A (1..9) IP65
Dimming: PHASE - 0-10V

ESME PRECISION R20


design: Jude Allen

565x25 mm
22,24x0,98" IP20 Class 2 



Flush optic downlight
18W · 24VDC · Parallel wiring
CRI95 · 3-Step MacAdam

2700K	1892 lm
3000K	2010 lm
3500K	2162 lm
4000K	2314 lm

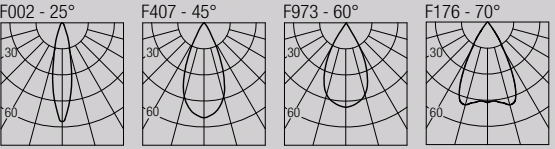

Code Construction



LSR20 X X X				
	27	30	35	40
	2700K	3000K	3500K	4000K
1	2	3	4	
25°	45°	60°	70°	(Batwing)
1	5			
White	Black			

Accessories

AT2464Q565025
Airtight recessed housing for insulated ceiling
IC2464Q565025
Recessed housing for insulated ceiling

MP-Q565025
Baseplate

Q565025
T-bar baseplate




24VDC Drivers

CV2496A (1..4) IP65
Dimming: PHASE - 0-10V




ESME PERFORMANCE R10

design: Jude Allen
285x18 mm
11,22x0,70" IP20 Class 2 



Flush optic downlight
9W · 24VDC · Parallel wiring
CRI95 · 3-Step MacAdam

2700K	825 lm
3000K	865 lm
3500K	890 lm
4000K	985 lm

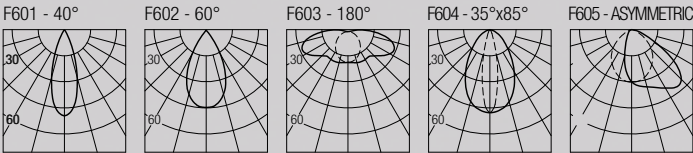


Code Construction

EPR10 X X X				
	27	30	35	40
	2700K	3000K	3500K	4000K
1	2	3	4	5
40°	60°	180°	35°x85°	Asymmetric
1	5			
White	Black			

Accessories

AT1264Q285018
Airtight recessed housing for insulated ceiling
IC1264Q285018
Recessed housing for insulated ceiling

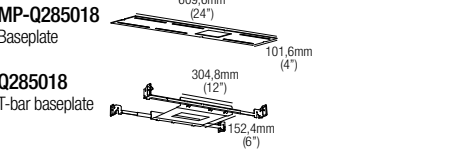


24VDC Drivers

CV2496A (1..9) IP65
Dimming: PHASE - 0-10V


ESME PERFORMANCE R20

design: Jude Allen
565x18 mm
22,24x0,70" IP20 Class 2 



Flush optic downlight
18W · 24VDC · Parallel wiring
CRI95 · 3-Step MacAdam

2700K	1650 lm
3000K	1730 lm
3500K	1780 lm
4000K	1970 lm

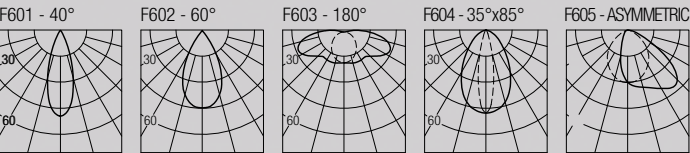


Code Construction

EPR20 X X X				
	27	30	35	40
	2700K	3000K	3500K	4000K
1	2	3	4	5
40°	60°	180°	35°x85°	Asymmetric
1	5			
White	Black			

Accessories

AT2464Q565018
Airtight recessed housing for insulated ceiling
IC2464Q565018
Recessed housing for insulated ceiling

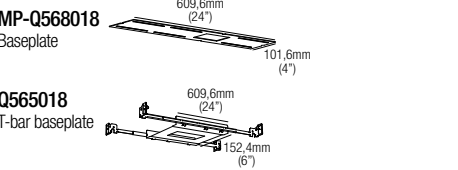

24VDC Drivers


CV2496A (1..4) IP65
Dimming: PHASE - 0-10V



DIP 6

design: Jude Allen


42 mm
1,65" IP20 Class 2  JA8



Flush optic downlight

Static White: 4,5W · 500mA (V_f 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	404 lm	3500K	545 lm
2700K	514 lm	4000K	538 lm
3000K	539 lm	DW	365 lm



Code Construction

DP6 X X						
24	27	30	35	40	DW	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	
1	5	C				
White	Black	Custom				

Accessories

AT064R01042
Airtight recessed housing for insulated ceiling

IC064R01042
Recessed housing for insulated ceiling

MP-R042

Baseplate

R01042

T-bar baseplate

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers


CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

FLEXUS 20

design: Rod&Todd






60 mm
2,36" IP20 Class 2 



Flush optic downlight

18W · 500mA (V_f 36V)
CRI98 · 2-Step MacAdam

2700K	2165 lm
3000K	2279 lm
3500K	2498 lm
4000K	2423 lm



Code Construction

FX2 X X X						
27	30	35	40			
2700K	3000K	3500K	4000K			
1	2	3	4	5	6	
15°	15°	24°	36°	60°	20°x55°	
Soft	Tight					Oval
1	5	C				
White	Black	Custom				

Accessories

AT064R01060
Airtight recessed housing for insulated ceiling

IC064R01060
Recessed housing for insulated ceiling

MP-R060

Baseplate

R01060

T-bar baseplate

LH06

Low luminance hex louvre

500mA Drivers


CCPRO40A-500 (1) IP20
Dimming: PHASE - 0-10V




AIMEE 6

design: Jude Allen

55 mm
2,16" IP20 Class 2  us JA8



Recessed optic downlight
4,5W · 500mA (V, 9V) · Series wiring
CRI98 · 2-Step MacAdam



Code Construction

AE6 X X			
27	30	35	40
2700K	3000K	3500K	4000K
1	5	C	
White	Black	Custom	

Accessories

AT064R01055
Airtight recessed housing for insulated ceiling
IC064R01055
Recessed housing for insulated ceiling

MP-R055
Baseplate
R01055
T-bar baseplate


500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V
CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V


AIMEE 10

design: Jude Allen

65 mm
2,55" IP20 Class 2  us JA8



Recessed optic downlight
9W · 500mA (V, 18V) · Series wiring
CRI98 · 2-Step MacAdam



Code Construction

AE10 X X			
27	30	35	40
2700K	3000K	3500K	4000K
1	5	C	
White	Black	Custom	

Accessories

AT086R02065
Airtight recessed housing for insulated ceiling
IC086R02065
Recessed housing for insulated ceiling

MP-R065
Baseplate
R02065
T-bar baseplate


500mA Drivers

CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V
CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V

FRANNY 20

design: Rod&Todd


65 mm
2,56" IP20 Class 2 cETLus



Recessed optic downlight

18W · 500mA (V, 36V)
CRI98 · 2-Step MacAdam

2700K	2165 lm
3000K	2279 lm
3500K	2498 lm
4000K	2423 lm

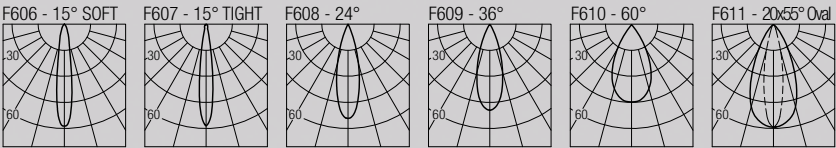


Code Construction

FN2 X X X											
	27	30	35	40							
	2700K	3000K	3500K	4000K							
1	2	3	4	5	6						
15°	15°	24°	36°	60°	20°x55°						
Soft	Tight				Oval						
1	5	C									
White	Black	Custom									

Accessories


AT086R02065
Airtight recessed housing for insulated ceiling
IC086R02065
Recessed housing for insulated ceiling



MP-R065
Baseplate



R02065
T-bar baseplate



LH06
Low luminance hex louvre




500mA Drivers

CCPRO40A-500 (1) IP20
Dimming: PHASE - 0-10V

DIP 6 TRIMLESS

design: Jude Allen

IP20 Class 2 cETLus JA8




Trimless downlight

Static White: 4,5W · 500mA (V, 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V, 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	404 lm	3500K	545 lm
2700K	514 lm	4000K	538 lm
3000K	539 lm	DW	365 lm

F615 - Wall Washer




Code Construction

DP6T X X						
	24	27	30	35	40	DW
	2400K	2700K	3000K	3500K	4000K	Dim to Warm
1	5	C				
White	Black	Custom				

Accessories


AT086R02055
Airtight recessed housing for insulated ceiling
IC086R02055
Recessed housing for insulated ceiling




MP-R055
Baseplate



R02055
T-bar baseplate



ZDP001
Plasterboard recessing frame



Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V
CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V


Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V
CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

ZERO Q6

design: Jude Allen


IP20 Class 2  JA8



Trimless downlight

Static White: 4,5W · 500mA (V_i 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_i 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	406 lm	3500K	548 lm
2700K	517 lm	4000K	541 lm
3000K	541 lm	DW	358 lm



Code Construction

ZQ6 X X X						
	1	2				
	25°	45°				
	24	27	30	35	40	DW
	2400K	2700K	3000K	3500K	4000K	Dim to Warm
1	5	C				
White	Black	Custom				

Accessories

AT064Q01040

Airtight recessed housing for insulated ceiling

IC064Q01040

Recessed housing for insulated ceiling

ZQK002

Plasterboard recessing frame
Flangia per cartongesso

MP-Q040


Baseplate

Q01040

T-bar baseplate

LH01

Low luminance hex louvre

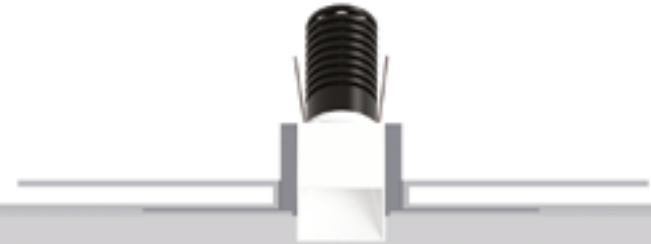

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20

Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20

Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20

Dimming: PHASE - 0-10V


CCPRO40A-250-DW (1..3) IP20

Dimming: PHASE - 0-10V

ZERO Q10

design: Jude Allen


IP20 Class 2  JA8



Trimless downlight

Static White: 9W · 500mA (V_i 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_i 18V) · Series wiring
Tunable White: 9W · 500mA (V_i 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	744 lm	4000K	1139 lm
2700K	1088 lm	DW	645 lm
3000K	1142 lm	TW	847 lm
3500K	1156 lm		

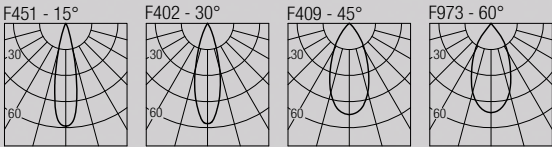

Code Construction

ZQ10 X X X X							
	1	2	3	4			
	15°	30°	45°	60°			
	24	27	30	35	40	DW	TW
	2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White
1	5	C					
White	Black	Custom					

Accessories

AT086Q02058

Airtight recessed housing for insulated ceiling

IC086Q02058

Recessed housing for insulated ceiling

MP-Q058

Baseplate

Q02058


T-bar baseplate

LH02

Low luminance hex louvre

ZQK006

Plasterboard recessing frame
Flangia per cartongesso



Static White - 500mA Drivers

CCPRO10A-500 (1) IP20

Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20

Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1) IP20

Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1) IP20

Dimming: PHASE - 0-10V

Tunable White - 500mA Drivers

DL0561S1 (1..3) IP20


Dimming: PHASE - 0-10V



AIMEE 6 TRIMLESS


design: Jude Allen

IP20 Class 2  JA8



Trimless downlight
4,5W · 500mA (V, 9V) · Series wiring
CRI98 · 2-Step MacAdam

2700K	526 lm
3000K	550 lm
3500K	557 lm
4000K	550 lm



Code Construction

AE6T X X			
27	30	35	40
2700K	3000K	3500K	4000K
1	5	C	
White	Black	Custom	

Accessories

AT064R01070
Airtight recessed housing for insulated ceiling

IC064R01070
Recessed housing for insulated ceiling

MP-R070
Baseplate

R01070
T-bar baseplate

ZAM001
Plasterboard recessing frame

500mA Drivers


CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V

AIMEE 10 TRIMLESS


design: Jude Allen

IP20 Class 2  JA8



Trimless downlight
9W · 500mA (V, 18V) · Series wiring
CRI98 · 2-Step MacAdam

2700K	1069 lm
3000K	1121 lm
3500K	1135 lm
4000K	1119 lm



Code Construction

AE10T X X			
27	30	35	40
2700K	3000K	3500K	4000K
1	5	C	
White	Black	Custom	

Accessories

AT086R02075
Airtight recessed housing for insulated ceiling

IC086R02075
Recessed housing for insulated ceiling

MP-R075
Baseplate

R02075
T-bar baseplate

ZAM005
Plasterboard recessing frame

500mA Drivers


CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

ZOE 20


design: Rod&Todd

IP20 Class 2 



Trimless downlight
18W · 500mA (V,36V)
CRI98 · 2-Step MacAdam

2700K	2165 lm
3000K	2279 lm
3500K	2498 lm
4000K	2423 lm

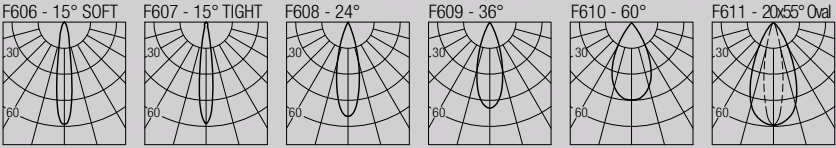

Code Construction

ZE		X	X						
		27	30	35	40				
		2700K	3000K	3500K	4000K				
1	2	3	4	5	6				
15°	15°	24°	36°	60°	20°x55°				
Soft	Tight				Oval				
1	5	C							
White	Black	Custom							

Accessories

AT086R02075
Airtight recessed housing for insulated ceiling

IC086R02075
Recessed housing for insulated ceiling

MP-R075
Baseplate

R02075
T-bar baseplate

ZQSU002 White
Plasterboard recessing frame

ZQSU002.BMK-WH White
ZQSU002.BMK-BLK Black
ZQSU002.BMK-CU Custom
Backmount frame for hard surfaces

LH06
Low luminance hex louvre


500mA Drivers
CCPR040A-500 (1) IP20
Dimming: PHASE - 0-10V




AIMEE T6

design: Jude Allen


IP20 Class 2 




Trimless projector
4,5W · 500mA (V_i 9V) · Series wiring
CRI98 · 2-Step MacAdam



Code Construction



Accessories

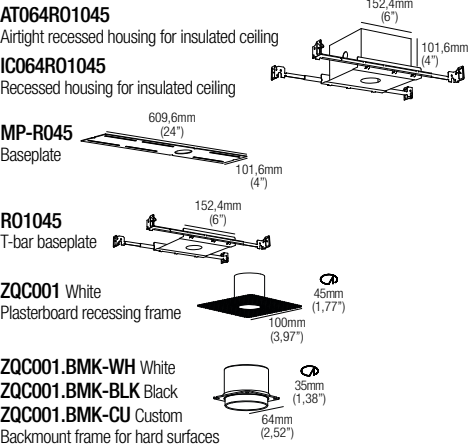

500mA Drivers


CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V


AIMEE R6

design: Jude Allen


40 mm 1,57" IP20 Class 2 




Semi-recessed projector
4,5W · 500mA (V_i 9V) · Series wiring
CRI98 · 2-Step MacAdam



Code Construction



Accessories

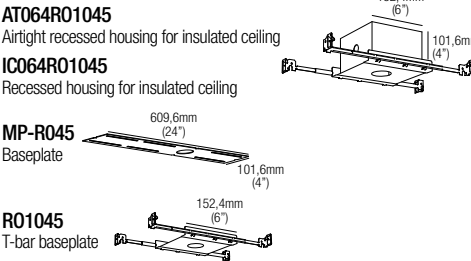

500mA Drivers


CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V


AIMEE T10

design: Jude Allen


IP20 Class 2 




Trimless projector
9W · 500mA (V_i 18V) · Series wiring
CRI98 · 2-Step MacAdam



Code Construction



Accessories

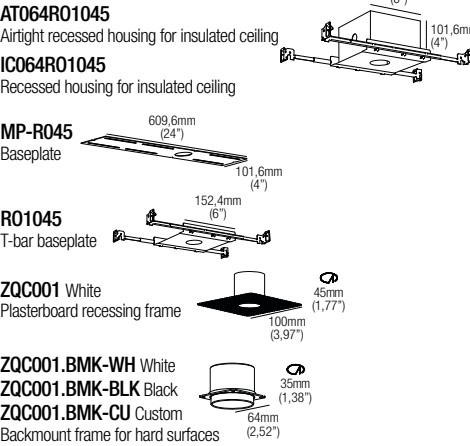

500mA Drivers


CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V


AIMEE R10

design: Jude Allen


40 mm 1,57" IP20 Class 2 




Semi-recessed projector
9W · 500mA (V_i 18V) · Series wiring
CRI98 · 2-Step MacAdam



Code Construction



Accessories

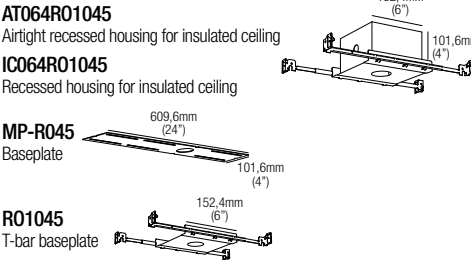

500mA Drivers


CCPRO10A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20
Dimming: PHASE - 0-10V


AIMEE S6

design: Jude Allen


IP20 Class 2 

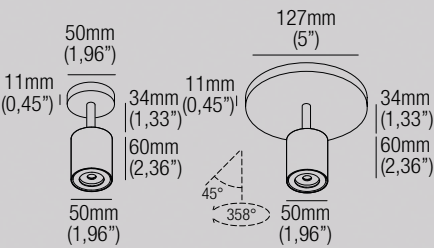

Surface projector
4,5W · 500mA (V, 9V) · Series wiring
CRI98 · 2-Step MacAdam



Code Construction




500mA Drivers

CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V
CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V


AIMEE S10

design: Jude Allen


IP20 Class 2 

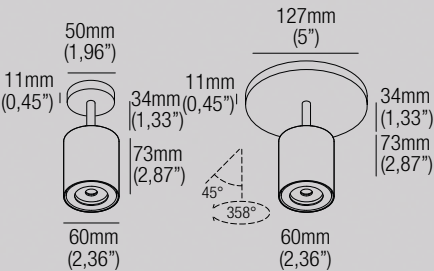

Surface projector
9W · 500mA (V, 18V) · Series wiring
CRI98 · 2-Step MacAdam



Code Construction



500mA Drivers


CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V
CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V



WAND S1020


design: Jude Allen

IP20 

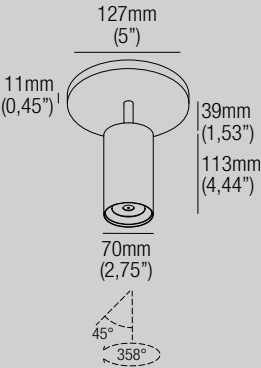

Surface projector
9W · 18W · 120VAC
CRI98 · 2-Step MacAdam

	9W	18W
2700K	1137 lm	2165 lm
3000K	1196 lm	2279 lm
3500K	1311 lm	2498 lm
4000K	1272 lm	2423 lm

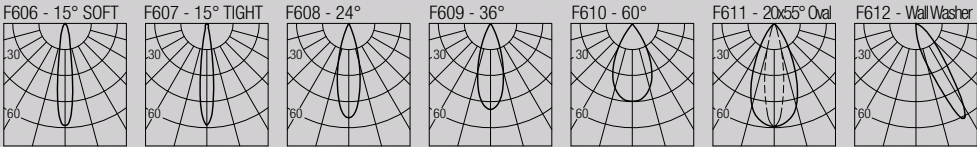

Code Construction

WDS X X X X

1	2	3	4	5	6	7
Power	9W	18W				
15° Soft	15° Tight	24°	36°	60°	20x55° Oval	Wall Washer
27	30	35	40			
2700K	3000K	3500K	4000K			
1	5	C				
White	Black	Custom				


Accessories

- LH06**
Low luminance hex louvre 
- GEL50**
Colour corrective poly gel, consult with factory 
- OPT5015S** 15° Soft beam
- OPT5015T** 15° Tight beam
- OPT5024** 24°
- OPT5036** 36°
- OPT4560** 60°
- OPT500** 20x55° Oval
- OPT50WW** Wall Washer
- Field changeable optic 


AIMEE X6

design: Jude Allen

IP20 Class 2 



Projector for 24VDC tracks
4,5W · 500mA (V_i 9V) · Series wiring
CRI98 · 2-Step MacAdam



Code Construction

AEX6 X X			
27	30	35	40
2700K	3000K	3500K	4000K
1	5	C	
White	Black	Custom	

500mA Drivers


CV2496A (1..18) IP20
Dimming: PHASE - 0-10V




AIMEE X10

design: Jude Allen

IP20 Class 2 



Projector for 24VDC tracks
9W · 500mA (V_i 18V) · Series wiring
CRI98 · 2-Step MacAdam



Code Construction

AEX10 X X			
27	30	35	40
2700K	3000K	3500K	4000K
1	5	C	
White	Black	Custom	

500mA Drivers


CV2496A (1..18) IP20
Dimming: PHASE - 0-10V




LINE S6

design: Jude Allen

IP20 Class 2 

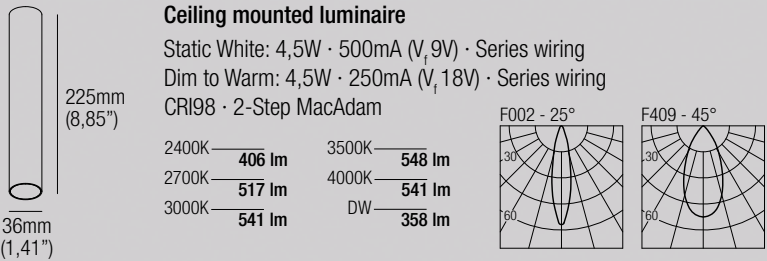

Code Construction

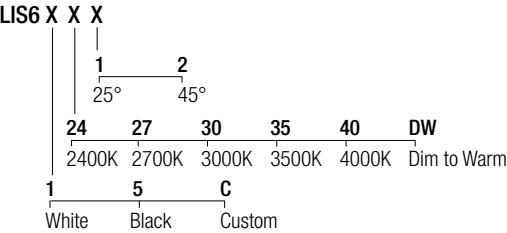

Accessories

LH01
Low luminance hex louvre 

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V
CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V


Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V
CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V


LINE W6

design: Jude Allen

IP20 Class 2  **ADA**

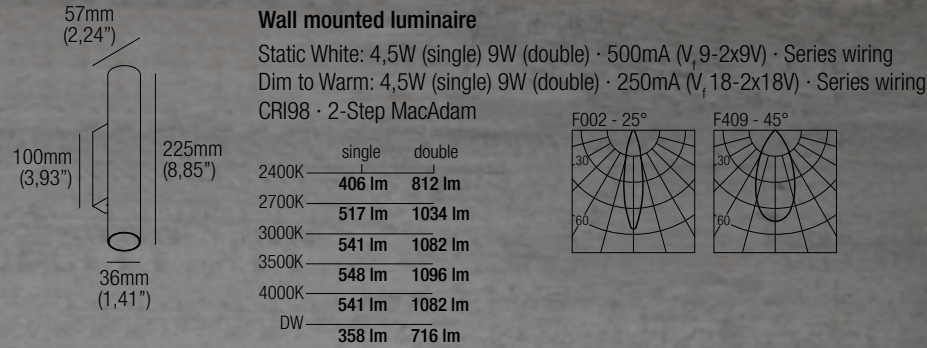

Code Construction

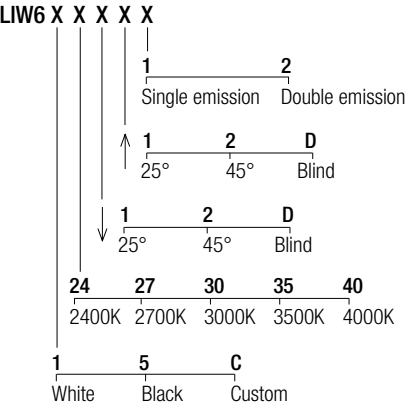

Accessories

LH01
Low luminance hex louvre 

Static White - 500mA Drivers

CCPRO10A-500 (1..2/1) IP20
Dimming: PHASE - 0-10V
CCPRO40A-500 (1..6/1..3) IP20
Dimming: PHASE - 0-10V


Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2/1) IP20
Dimming: PHASE - 0-10V
CCPRO40A-250-DW (1..3/1) IP20
Dimming: PHASE - 0-10V

LINE P6

design: Jude Allen

IP20 Class 2 





Pendant


Static White: 4,5W · 500mA (V, 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V, 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	406 lm
2700K	517 lm
3000K	541 lm

3500K	548 lm
4000K	541 lm
DW	358 lm



Code Construction

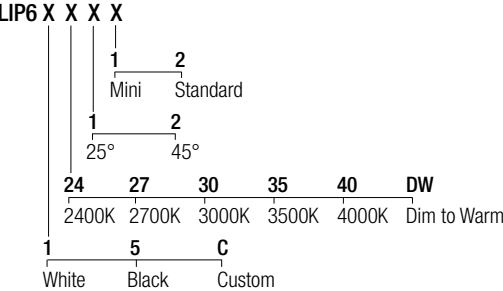

Accessories

LH01
Low luminance hex louvre 

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers


CCPRO10A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

WAND P1020

design: Jude Allen








IP20 




Pendant

9W · 18W · 120VAC
CRI98 · 2-Step MacAdam

	9W	18W
2700K	1137 lm	2165 lm
3000K	1196 lm	2279 lm
3500K	1311 lm	2498 lm
4000K	1272 lm	2423 lm



Code Construction

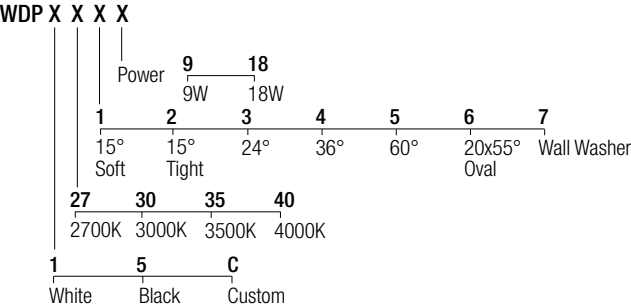

Accessories

LH06
Low luminance hex louvre 

GEL50
Colour corrective poly gel, consult with factory 

OPT5015S 15° Soft beam

OPT5015T 15° Tight beam

OPT5024 24°

OPT5036 36°

OPT4560 60°

OPT500 20x55° Oval


OPT50WW Wall Washer

Field changeable optic 

LINE PT6

design: Jude Allen


IP20 Class 2 



Trimless pendant

Static White: 4,5W · 500mA (V, 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V, 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	406 lm	3500K	548 lm
2700K	517 lm	4000K	541 lm
3000K	541 lm	DW	358 lm



Code Construction

LIPT6 X X X						
	1	2				
	25°	45°				
24	27	30	35	40	DW	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	
1	5	C				
White	Black	Custom				

Accessories

AT064R01045

Airtight recessed housing for insulated ceiling

IC064R01045

Recessed housing for insulated ceiling

MP-R045

Baseplate

R01045

T-bar baseplate

ZQC001

White
Plasterboard recessing frame

ZQC001.BMK-WH


White
Backmount frame for hard surfaces

ZQC001.BMK-BLK

Black
Backmount frame for hard surfaces

ZQC001.BMK-CU

Custom
Backmount frame for hard surfaces

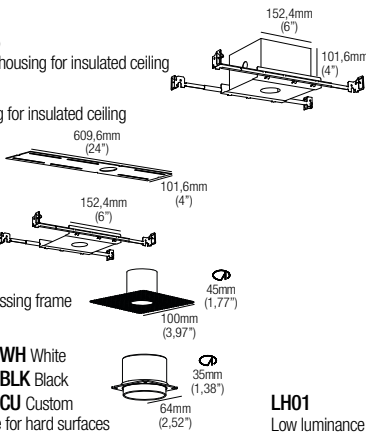

LH01

Low luminance hex louvre

Static White - 500mA Drivers

CCPR010A-500

(1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500

(1..6) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPR010A-250-DW

(1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-250-DW


(1..3) IP20
Dimming: PHASE - 0-10V



FLY 20

design: Rod&Todd


70 mm
2,75" IP67 Class 2 



Flush optic IP-rated downlight

18W · 500mA (V, 36V)
CRI98 · 2-Step MacAdam

2700K — 2165 lm
3000K — 2279 lm
3500K — 2498 lm
4000K — 2423 lm

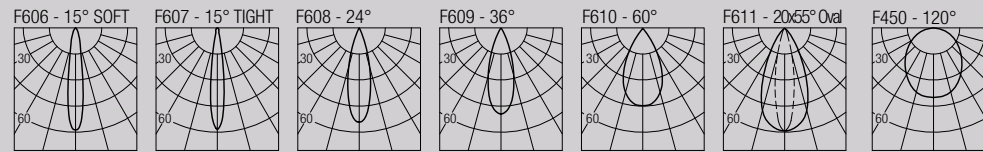

Code Construction

FLY2 X X X						
1	2	3	4	5	6	5
15°	15°	24°	36°	60°	20°x55°	120°
Soft	Tight				Oval	
B	N	Z	C			
White	Black	INOX	Custom			
		AISI 316L				
27	30	35	40			
2700K	3000K	3500K	4000K			

Accessories

AT064R01070

Airtight recessed housing for insulated ceiling

IC064R01070

Recessed housing for insulated ceiling

LH06

Low luminance hex louvre

MP-R070


Baseplate

R01070

T-bar baseplate

CSXJ02

Recessing box - Controcassa



500mA Drivers


CCPRO40A-500 (1) IP20

Dimming: PHASE - 0-10V

VEGA 6

design: Roberto Mantovani


50 mm
1,97" IP67 Class 2 



Recessed optic IP-rated downlight

Static White: 4,5W · 500mA (V, 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V, 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K — 434 lm
2700K — 553 lm
3000K — 579 lm
3500K — 586 lm
4000K — 579 lm
DW — 383 lm

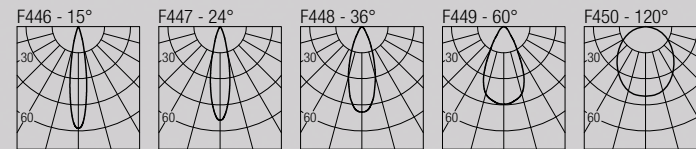

Code Construction

VG6 X X X						
N	S	M	W	X		
15°	24°	36°	60°	120°		
B	N	C				
White	Black	Custom				
24	27	30	35	40	DW	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	

Accessories

AT064R01051

Airtight recessed housing for insulated ceiling

IC064R01051

Recessed housing for insulated ceiling

MP-R051


Baseplate

R01051

T-bar baseplate

CSDS10

Recessing box



LH03

Low luminance hex louvre

Static White - 500mA Drivers

CCPRO10A-500 (1..2) IP20

Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20

Dimming: PHASE - 0-10V

Dim to Warm - 250mA Drivers

CCPRO10A-250-DW (1..2) IP20

Dimming: PHASE - 0-10V


CCPRO40A-250-DW (1..3) IP20

Dimming: PHASE - 0-10V



VEGA 10


design: Roberto Mantovani
60 mm
IP67 Class 2 



Flush optic IP-rated downlight

Static White: 9W · 500mA (V_i 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_i 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	770 lm	3500K	1195 lm
2700K	1125 lm	4000K	1178 lm
3000K	1180 lm	DW	667 lm

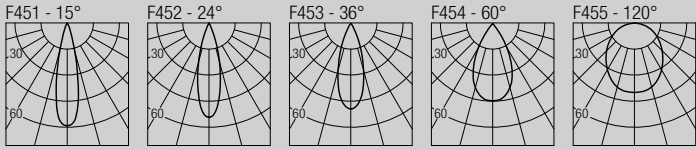

Code Construction

VG1 X X X					
	N	S	M	W	X
	15°	24°	36°	60°	120°
B	N	C			
White	Black	Custom			
24	27	30	35	40	DW
2400K	2700K	3000K	3500K	4000K	Dim to Warm

Accessories

AT086R02060
Airtight recessed housing for insulated ceiling

IC086R02060
Recessed housing for insulated ceiling

LH04
Low luminance hex louvre

MP-R060
Baseplate

R02060
T-bar baseplate

CSXJ01
Recessing box

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V


Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

ZIGGY 6


design: Roberto Mantovani
IP67 Class 2 



Trimless IP-rated downlight

Static White: 4,5W · 500mA (V_i 9V) · Series wiring
Dim to Warm: 4,5W · 250mA (V_i 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	434 lm	3500K	586 lm
2700K	553 lm	4000K	579 lm
3000K	579 lm	DW	383 lm

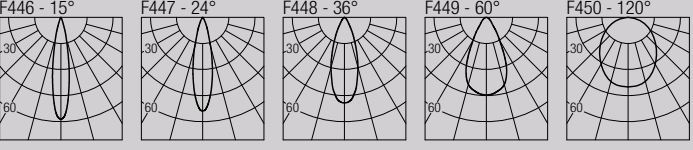

Code Construction

ZG6 X X X					
	N	S	M	W	X
	15°	24°	36°	60°	120°
B	N	C			
White	Black	Custom			
24	27	30	35	40	DW
2400K	2700K	3000K	3500K	4000K	Dim to Warm

Accessories

AT086R02075
Airtight recessed housing for insulated ceiling

IC086R02075
Recessed housing for insulated ceiling

MP-R075
Baseplate

R02075
T-bar baseplate

LH04
Low luminance hex louvre

ZQC003.BMK-WH White
ZQC003.BMK-BLK Black
ZQC003.BMK-CU Custom
Backmount frame for hard surfaces

Static White - 500mA Drivers

CCPR010A-500 (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20
Dimming: PHASE - 0-10V


Dim to Warm - 250mA Drivers

CCPR010A-250-DW (1..2) IP20
Dimming: PHASE - 0-10V

CCPR040A-250-DW (1..3) IP20
Dimming: PHASE - 0-10V

VEGA 20


design: Roberto Mantovani
70 mm
IP67 Class 2 



Recessed optic IP-rated downlight

18W · 500mA (V_i 36V)
CRI98 · 2-Step MacAdam

2700K	2165 lm
3000K	2279 lm
3500K	2498 lm
4000K	2423 lm

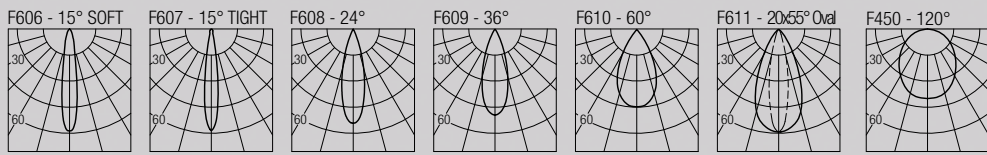

Code Construction

VG2 X X X						
	1	2	3	4	5	6
	15° Soft	15° Tight	24°	36°	60°	20°x55° Oval
1	5	C				
White	Black	Custom				
27	30	35	40			
2700K	3000K	3500K	4000K			

Accessories

AT064R01070
Airtight recessed housing for insulated ceiling

IC064R01070
Recessed housing for insulated ceiling

LH06
Low luminance hex louvre

MP-R070
Baseplate

R01070
T-bar baseplate


CSXJ02
Recessing box - Controcassa

500mA Drivers

CCPR040A-500 (1) IP20
Dimming: PHASE - 0-10V

ZIGGY 10


design: Roberto Mantovani
IP67 Class 2 



Trimless IP-rated downlight

Static White: 9W · 500mA (V_i 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_i 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	770 lm	3500K	1195 lm
2700K	1125 lm	4000K	1178 lm
3000K	1180 lm	DW	667 lm

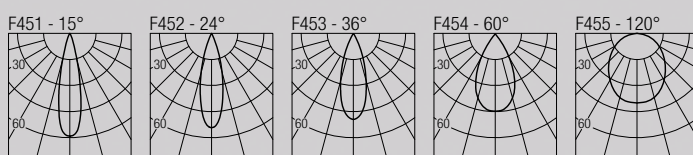

Code Construction

ZG1 X X X					
	N	S	M	W	X
	15°	24°	36°	60°	120°
B	N	C			
White	Black	Custom			
24	27	30	35	40	DW
2400K	2700K	3000K	3500K	4000K	Dim to Warm

Accessories

AT086R02075
Airtight recessed housing for insulated ceiling

IC086R02075
Recessed housing for insulated ceiling

MP-R075
Baseplate

R02075
T-bar baseplate

LH04
Low luminance hex louvre

ZQC003.BMK-WH White
ZQC003.BMK-BLK Black
ZQC003.BMK-CU Custom
Backmount frame for hard surfaces

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers


CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

ZIGGY 20

design: Roberto Mantovani


IP67 Class 2 



Trimless IP-rated downlight

18W · 500mA (V_i 36V)
CRI98 · 2-Step MacAdam

2700K — 2165 lm
3000K — 2279 lm
3500K — 2498 lm
4000K — 2423 lm

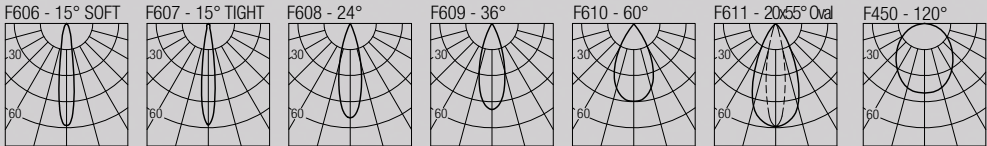

Code Construction

ZG2 X X X						
1	2	3	4	5	6	5
15° Soft	15° Tight	24°	36°	60°	20°x55° Oval	120°
1	5	C				
White	Black	Custom				
27	30	35	40			
2700K	3000K	3500K	4000K			

Accessories

AT086R02090

Airtight recessed housing for insulated ceiling

IC086R02090

Recessed housing for insulated ceiling

LH06

Low luminance hex louvre

MP-R090



Baseplate

R02090

T-bar baseplate

ZQC006

Plasterboard recessing frame



500mA Drivers


CCPR040A-500 (1) IP20

Dimming: PHASE - 0-10V

DIG 20

design: Rod&Todd


IP67 Class 2  



Uplight

18W · 500mA (V_i 36V)
CRI98 · 2-Step MacAdam

2700K — 2165 lm
3000K — 2279 lm
3500K — 2498 lm
4000K — 2423 lm

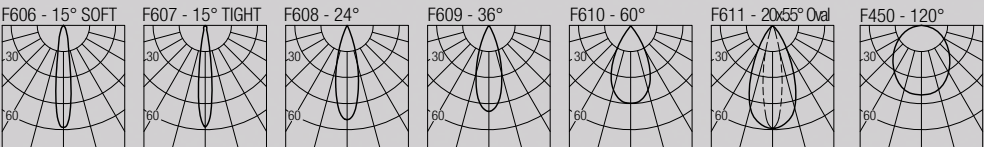

Code Construction

DIG2 X X X						
1	2	3	4	5	6	5
15° Soft	15° Tight	24°	36°	60°	20°x55° Oval	120°
N	Z	C				
Black	INOX AISI 316L	Custom				
27	30	35	40			
2700K	3000K	3500K	4000K			

Accessories

CSXJ02.CP


Concrete pour housing
for ingrade

CSXJ02

Recessing box

LH06

Low luminance hex louvre



500mA Drivers

CCPR040A-500 (1) IP20


Dimming: PHASE - 0-10V



RENÉ

design: Roberto Mantovani

IP65 Class 2 



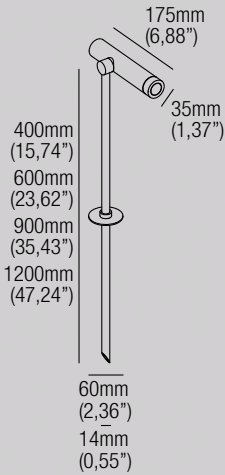


IP-rated projector


Static White: 9W · 500mA (V_f 18V) · Series wiring
Dim to Warm: 7,2W · 400mA (V_f 18V) · Series wiring
CRI98 · 2-Step MacAdam

2400K	728 lm
2700K	1064 lm
3000K	1116 lm

3500K	1130 lm
4000K	1114 lm
DW	630 lm



Code Construction

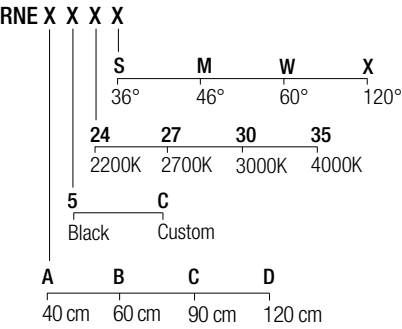

Static White - 500mA Drivers

CCPR010A-500 (1) IP20
Dimming: PHASE - 0-10V
CCPR040A-500 (1..3) IP20
Dimming: PHASE - 0-10V

Dim to Warm - 400mA Drivers

CCPR010A-400 (1) IP20
Dimming: PHASE - 0-10V
CCPR040A-400 (1..3) IP20
Dimming: PHASE - 0-10V

FLEXA
LIGHTING
NORTH AMERICA

FLEXALIGHTING North America
Unit 22 - 15531
24th Avenue Surrey, BC.
Canada, V4A 2J4.
ph. 604.385.4311
www.flexalighting-na.com

PART OF
DEXELANCE