

MAUNA 10

IP-rated projector

design Rod&Todd



IP65 projectors equipped with COB LEDs with CRI98 and R9 93, they offer a wide range of narrow and precise light beams. Made of anodized aluminum, they are suitable for installation in particularly aggressive environments. Optical quality and fine finishes come together in a product of great reliability and quality.

Projecteurs IP65 équipés de LED COB avec CRI98 et R9 93, ils offrent une large gamme de faisceaux lumineux étroits et précis. Fabriqués en aluminium anodisé, ils sont adaptés à une installation dans des environnements particulièrement agressifs. La qualité optique et les finitions soignées sont réunies dans un produit d'une grande fiabilité et d'une grande qualité.

Proyectores IP65 equipados con LED COB con CRI98 y R9 93, ofrecen una amplia gama de haces de luz estrechos y precisos. Fabricados en aluminio anodizado, son adecuados para su instalación en entornos especialmente agresivos. Calidad óptica y finos acabados se unen en un producto de gran fiabilidad y calidad.

IP65 Class 2  made in Canada

Supply current

Courant d'alimentation

Corriente de alimentación

Static White: 500mA (V_i 18V)

Dim To Warm: 400mA (V_i 18V)

Power

Pouissance

Potencia

Static White: 9W

Dim To Warm: 7,2W

Series wiring

Câblage en série

Cableado en serie

LED selection

Sélection des LED

Selección del LED

2-Step MacAdam

CRI

98

Lumens

2400K — 770 lm

2700K — 1125 lm

3000K — 1180 lm


3500K — 1195 lm

4000K — 1178 lm

DW — 667 lm

Dimensions

Dimensiones



Code construction

Construction du code produit


Construcción del código de producto

MU1	X	X	X					
		N	S	M	W	X		
		15°	24°	36°	60°	120°		
		24	27	30	35	40	DW	
		2400K	2700K	3000K	3500K	4000K	Dim to Warm	
	2	5	6	C				
	Aluminium	Black	Bronze	Custom				

Photometric diagrams

Diagrammes photométriques

Diagramas fotométricos

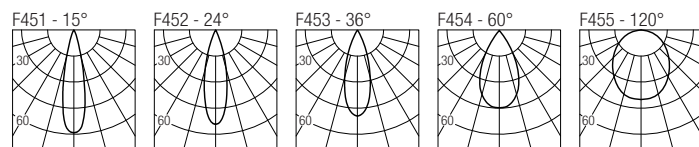


Accessories

Accessoires

Accesorios

CP0022

Earth spike



LH04

Low luminance hex louvre 

XNTX202 Aluminium

XNTX205 Black

XNTX206 Bronze

Antiglare snoot



XXT01

Tree strap



Static White 500mA drivers

Static White Alimentateurs 500mA

Static White Alimentadores 500mA

CCPR010A-500 (1) IP20

Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20

Dimming: PHASE - 0-10V

Dim to Warm 400mA drivers

Dim to Warm Alimentateurs 400mA

Dim to Warm Alimentadores 400mA

CCPR010A-400 (1) IP20

Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20

Dimming: PHASE - 0-10V